

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B31B 1/64, 1/90, B65B 1/08, 43/42, B65G 29/00, 37/00, B32B 5/00, A44B 1/04, 11/25, B32B 31/00		A1	(11) International Publication Number: WO 98/03328
(21) International Application Number: PCT/US97/13028		(81) Designated States: AU, CA, CN, JP, KR, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 24 July 1997 (24.07.97)		(43) International Publication Date: 29 January 1998 (29.01.98)	
(30) Priority Data: 60/022,353 24 July 1996 (24.07.96) US 60/036,186 18 January 1997 (18.01.97) US 60/035,051 22 January 1997 (22.01.97) US		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71)(72) Applicant and Inventor: JOHNSON, James [US/US]; 4250 N.E. Expressway, P.O. Box 47784, Atlanta, GA 30340 (US).			
(74) Agent: BEISER, Robert, S.; Michael, Best & Friedrich, 77 West Wacker, Chicago, IL 60601-1635 (US).			

(54) Title: FASTENER TAPE MATERIAL, BAG UTILIZING FASTENER TAPE MATERIAL, AND METHOD OF MANUFACTURE THEREOF

(57) Abstract

The present invention includes methods, an apparatus and a system in which reclosable bags and components thereof are formed. The reclosable bags (2001) are made from base web material that has transversely applied fastener tape segments thereon. The web material is used in a vertical form, fill and seal bag forming method. The method includes the steps of supplying a continuous strip of tape, having male and female fasteners profiler across the web for sealing thereon. In one embodiment a continuous strip of barrier material, and a continuous strip of fastener having first and second interlocked fastener profile strips are positioned on the continuous strip of tape; and secured thereon, the barrier tape is folded to obtain a fold and two opposing barrier tape fastener strip connecting portions; and, the fold is slit to form two separate continuous strips of barrier material strips and two continuous strips of tape. In another embodiment a coating is applied to the tape itself to prevent sealing of the folded slit tape to itself. The resulting tape and fastener are cut (220) and portioned properly on the web by the unique vacuum belt system of the present invention and by the interconnected tape drive, web drive and the connection to the form fill seal machine.

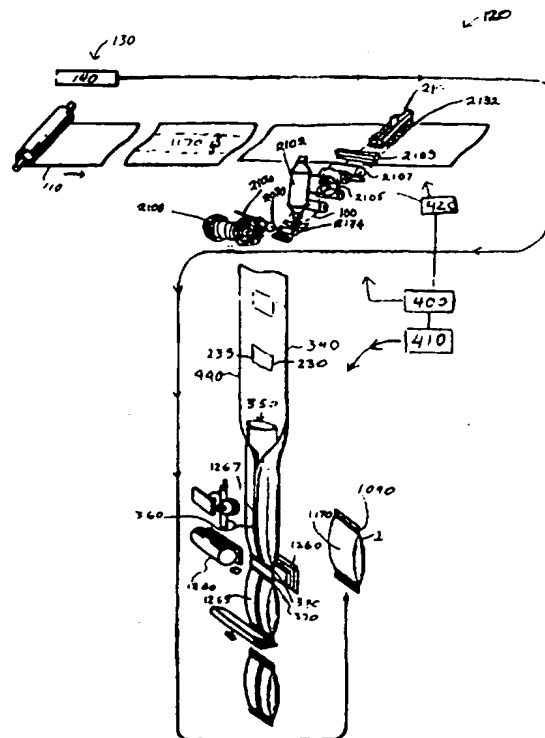

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

*Fastener Tape Material, Bag Utilizing Fastener Tape Material, and Method
of Manufacture Thereof*

BACKGROUND OF THE INVENTION

This application claims priority from United States Provisional Patent Application Serial No. 60/022,353 filed July 24, 1996; United States Provisional Patent Application Serial No. 60/036,186 filed January 18, 1997, and United States Provisional Patents Application Serial No. 60/035,051 filed January 22, 1997 all invented by the present inventor, James R. Johnson. This invention relates generally to reclosable plastic bags and in particular to tape used in the manufacture of reclosable plastic bags, the web that the bags are made from, methods related to their manufacture, and an apparatus for manufacturing reclosable bags that is more efficient and economical than conventional methods and devices.

While most packaging is done with polyethylene sheeting, or a polyethylene sealant layer if barrier sheeting is used, there are problems of sealing the intended sealant layer of the bag wall to reclosable profiles due to profile thicknesses, or due to the thicknesses of flange material that may be integral with the profile, even if the surfaces to be sealed are both polyethylene and compatible.

There are even more complex problems when the sealant layer of the bag walls is something other than polyethylene, as the inside bag wall layer of oriented polypropylene sealant layer of potato chip bags. Sealing reclosable materials to this wall means using materials that are compatible. This invention gives a practical means to accomplish these results.

U.S. Patent No. 4,909,017, McMahon discloses the delivery of a pair of

interlocked, profiled fasteners transversely across a web of film used in forming a plurality of bags. However, the system of McMahon is non-enabling in that fastener strips cannot be delivered as described therein.

There is no attempt in the written description to describe how the narrow fastener strip can be fed, held and sealed onto the base web. The strip material would be unstable for sealing due to the rib and groove design, which would rock on center. The strip material is naturally curled from extrusion and distorted from being wound onto a spool. The difficulty of feeding this unstable strip cross web, remove curls and twists, stretch straight and hold for heat and pressure application between a seal bar and anvil makes this method chaotic and impractical.

There are at least two other major shortcomings of the McMahon '017 patent. The first shortcoming involves the impossibility of making commercially acceptable seals of the bag walls to the backside of each fastener half in the bagger sealing jaws. The second shortcoming involves the window of registration required to seal the backside of the fastener to a finished bag wall during bagger cross sealing and the inability of known form fill seal and equipment to repeat the bagger film draw with the required accuracy.

Specifically, the McMahon '017 patent describes a pressure bar seal in the bagger sealing jaws that seals the outer bag material precisely to the backside of the fastener profile. Yet, it has been discovered, as described in Applicant's specification, that a pressure bar seal requires a stable and flat surface to properly seal. The irregular shape of the fastener profile makes this impossible. One requires heat, dwell time, and pressure to effect a commercially acceptable seal and due to the irregular shape of the profile, it is impossible to get enough stable

pressure to accomplish a commercially acceptable seal. The surface moves and gives unpredictably. If enough heat and pressure are applied for a sufficient dwell time to mash the base of the profile flat enough to seal, the profile hooks are softened and deformed, making it impossible to repeatedly use the completed bag
5 for opening and reclosing.

The McMahon '017 patent has an additional shortcoming related to sealing the seamed side of the bag to the opposite side of the fastener. Based on Applicant's knowledge and experience, this cannot be done to produce a commercially acceptable product. The fact is that no bagger can draw with the
10 accuracy the McMahon '017 patent requires, to place the second seal, in register, on the back side of the fastener profiles.

Another illustrative patent is U.S. Patent No. 5,461,845 to Yeager. There are at least two definitive shortcomings therein. The first shortcoming relates to the problem of having to open the zipper completely from the front panel of the
15 finished bag. Users of reclosable bags and packaging are accustomed to opening the profiled fastener from the "top" of the package, and not from the front panel of the package. Hence, the user will have to become accustomed to a method with which he may not be familiar or comfortable.

The second shortcoming is more serious, and relates to the requirement of
20 opening the package from the front panel thereof. If the package is to be opened from the front panel, a cut or perforation must be made before the fastener is applied. This cut, or perforation, is generally shaped like an "oval" with opening "tabs" for gaining access to the fastener. Since the fastener, most likely, is not closed at the ends of the fastener, the possibility of contamination exists.

The most expedient and economical way to make the package is to create the cut, or perforation, in one operation, just upstream of the fastener strip application. This operation, in its simplest form, will leave openings for potential contamination to pass through the cut or perforated, front panel opening. To
5 overcome this contamination potential, users of this method add a great deal more cost and complexity to create a sealed, sealable "patch", or some other means of eliminating this contamination risk. The same problem occurs, if the package must be hermetically sealed.

There is also a serious drawback of coextruding a flanged zipper having
10 ribs on the inside of the flanges so that it is unsealable, when heat is applied to each bag wall side. The drawback is that a unitary extruded flanged zipper has a limitation as to thinness of the flanges that can be integrally extruded with reclosable profile. Further, use of co-extruded ribs to make the inside of the flanges not seal together increases the thickness of the flange area even more.

15 This contrast in thickness of the 4 layers of material which includes the 2 bag walls and the 2 zipper flanges will make it virtually impossible to blend the cross seals through the 4 thickness area and into the 2 thickness area of the bag walls only. For example, if a 3 millimeter, i.e., "mils" wall bag is being made, the coextruded flange with ribs, will be 16 mils per side or 32 mils total. This would
20 require a blending of 38 mils to 6 mils and would most likely eliminate the possibility of closing off openings in the folds of any bag made on a vertical FFS machine.

Thus, there exists a need to solve the problems in the art that are articulated above.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the invention to overcome the shortcomings of the prior art by providing a large skirt (tape) area which a second seal can be easily registered. The skirt (tape) height of the area could be changed, depending upon the bagger design, condition, and the variation in draw height of the bagger.

It is another object of this invention to overcome the shortcomings of the art by using fastener profile mounted on tape in the bag forming process, and requiring that the operations involved sealing two flat, substantially parallel thin surfaces. Thus, there is no irregular surface that is sealed to attach the fastener to the front panel, or to carry the fastener through the bagger and down the form, fill and seal tube or to seal the back-seamed side of the package. It is also an object of the present invention to allow the customer/user of the package to open the package from the top, as he or she is accustomed.

It is an additional object of the invention to treat the inside surface of the skirt (tape) area to prevent area from being sealed together in the process described below, to allow zipper and bag opening from this area.

It is an additional object of the invention to solve the shortcomings of the art through the use of fastener tape as described below, to provide a thin substantially flat, fastener appendage which is sealed to the bag wall(s) and to treat the inside layers of the fastener opening tabs, above the fastener.

It is a further object of the invention to provide an automatic contamination-free package by sealing the fastener completely inside the package. In this variant, the top seal of the package must be cut off to allow the customer/user to get to the opening tabs of the fastener.

It is a further object of the invention to provide improved control of web dispensing by using driven, dancered unwinding of the base web and indexing of the base web for zipper application positioning. The zipper application includes a servo motor and computerized motor controls.

- 5 It is an additional object of the invention to provide unwinding, tensioning, guiding and indexing of the fastener tape materials in the attachment thereof to a web, linked to the indexing of web but independent thereof.

- It is a further object of the invention to obtain a balance of tensions between the fastener strip and tape material by providing a driven, dancered web
10 for feeding folded and lightly-tensioned tape material to a fastener sealing device.

 It is yet a further object of the invention to obtain a flatter, straighter, curl-less fastener tape from the fastener tape operation by more accurately controlling the relative tensions of the webless fastener and the tape material during application of the fastener material to the tape.

- 15 It is another object of the present invention to solve these and other problems in the art, and to serve a market that demands hundreds of millions of reclosable plastic bags annually. The objects and features of the present invention, other than those specifically set forth above, will become apparent in the detailed description of the invention set forth below and in the drawings.

- 20 The invention also provides a method of making a reclosable bag having a body with top and bottom ends and opposing walls in a vertical, form, fill and seal machine that includes the steps of forming the bag walls from web material having a longitudinal back seal extending between the top and bottom ends of the bag body, and transversely securing across the longitudinal back seal a flange of

a flanged, interlocked fastener strip. The flange is substantially wider than the width of the interlocked fastener strip attached to the flange. As such, it is appreciated that the sealer bars do not contact or deform the interlocked fastener strip during the sealing process. It is further appreciated that the method allows
5 for a commercially acceptable seal to be made across the longitudinal back seal while providing greater tolerance for deviations in bagger web draw.

The flange or tape is sized and dimensioned to provide a larger window of registration than that required to seal the backside of a conventional fastener onto a finished bag wall whether it is a back or front panel wall, directly onto the
10 backside of the fastener during bagger cross sealing. The flange or tape is also sized and dimensioned to provide repeatable sealing of the tape or flange to the bag wall during the transverse bagger cross sealing process while allowing for variances and deviations in bagger web draw.

The invention further includes an improved vertical, form, fill and seal
15 process that includes transversely sealing a non-profiled, stable and substantially flat surfaced appendage or flange having a profiled, interlocked, reclosable fastener strip connected thereto across the longitudinally extending back seal of a bag during bagger cross sealing. It is appreciated that the transverse sealing across the non-profiled, stable and substantially flat surfaced appendage permits one to
20 seal the appendage to bag material with an effective heat, dwell time, and pressure to effect a commercially acceptable seal without the surface moving and giving unpredictably. It is also appreciated that greater, pressure and dwell can be applied to mash the shape flat enough to seal, while simultaneously preventing the profiled fastener from softening and deforming making it possible to repeatedly use the

completed bag for opening and reclosing.

In a variant, as described above the invention provides a two piece tape or flange comprising a very thin, substantially flat, tape or flange portion connected to the zipper profiles to obtain a commercially acceptable flanged zipper. The very thin, substantially flat, tape or flange portion is preferably construct from web material of about 0.003" in thickness that is very flexible. It is also possible to use tape materials in the range of about 0.003" inches in thickness to as thin as 0.001" in thickness. The preferred loop is a high loop of about 1.25". By using a high loop it is possible to obtain enough stiffness in the combination tape/flange fastener profile assembly to push the assembly at the start of the transverse application process, and then attach the thin, flexible, wide loop quickly to a vacuum belt, so that it can be carried across the base web for positioning. Holding and transporting the flexible loop (or flange if the loop is split open) across the web is readily accomplished using a modest amount of vacuum. A printed barrier can be applied to the inside loop area to make it non-sealable, while adding very little to the thickness of the loop.

The system method, and (tape or flange) assembly described above is extremely versatile. The tape or flange is substantially thin allowing its use with a greater variety of bag walls materials, regardless of the base web thickness. The tape or flange, since it is ribless and thin, blends the cross seals better, from tape plus bag wall thickness to bag wall thickness only, and results in continuous seals, sealed in the bagger sealing jaws.

Further, the assembly described above is constructed to be readily, transversely "pulled" across a web of material, and the assembly method, and

system can be used with any appropriate tape base material. As described above, the invention described above can be used on laminate bag wall base web material, e.g. snack food bag wall and base web material where a user does not want to change their present structure/bag wall material which would not seal to LDPE material. The preferred non-sealable treatment of the tape or flange is to provide a printed food grade nitro cellulose coating into the loop (flap) area. As such, the invention provides a two-piece fastener profile having each respective profile connected to a loop portion of a tape or flange in which the inside loop portion of the tape or flange is treated to be non-sealable. e.g. has a non-sealing inside surface.

BRIEF DESCRIPTION OF THE DRAWINGS

The present application includes at least one drawing and/or photograph executed in color. Copies of this patent with color drawing(s)/photograph(s) will be provided by the Patent and Trademark Office upon request and payment of the necessary fee.

FIG. 1 is a schematic representation of the system for performing the processes of the present invention;

FIG. 2 is a schematic representation of a sub-assembly of an apparatus used in the system of FIG. 1;

FIG. 3 is a flow chart of a routine of the present invention;

FIG. 4 is a perspective view of the tape of FIG. 6 being ultrasonically staked to the web;

FIG. 5 is a perspective view of a web of the present invention;

FIG. 6 is a side cross sectional view of a tape of the present invention;

FIG. 7 is a side cross sectional view of a flange of the fastener of the present invention;

FIG. 8 is a side cross sectional view of a variant of a flange of the present invention of FIG. 7;

FIG. 9 is a side cross sectional view of a flange of the present invention;

FIG. 10 is a side cross sectional view of an assembled bag of the present invention;

FIG. 11 is a front plan view of the bag of FIG. 10;

FIG. 12 is a side cross sectional view of a variant of the bag of the invention and sealing bars;

FIG. 13 is a side cross sectional view of a flange of the invention;

FIG. 14 is a side cross sectional view of the bag material and a flange of the invention;

FIG. 15 is a side cross sectional view of a bag of the invention having the tape of FIG. 14;

FIG. 16 is an exploded side cross sectional view of an upper portion of a bag of the present invention having a fastener tape connected thereto in which the fastener is in an open position;

FIG. 17 is a top plan view of a web having fastener tape segments thereon;

FIG. 18 is a side cross sectional view of a portion of the web having fastener tape segments of FIG. 17;

FIG. 19 is a top plan view of the bag including the portion of the bag shown in FIG. 16;

FIG. 20 is a side perspective view of the fastener tape dispensing assembly of the present invention;

FIG. 20-A is a side view, partially broken away, of the fastener tape dispensing assembly of the present invention;

5 FIG. 20-B is a side view, partially broken away, of the fastener tape dispensing assembly of FIG. 20.

FIG. 21 is rear perspective view of the fastener tape dispensing assembly of FIG. 20;

10 FIG. 22 is a side perspective view illustrating an ultrasonic sealing horn and cutter and the fastener tape dispensing assembly of FIG. 20;

FIG. 23 is a rear perspective view illustrating the ultrasonic sealing horn and cutter of FIG. 22;

FIG. 24 is a rear perspective view illustrating a zipper spool drive and the fastener tape dispensing assembly of FIG. 22;

15 FIG. 25 is a side perspective view of a web material dispensing assembly of the form fill seal machine of the present invention and a roll of web material;

FIG. 26 is a rear perspective view of a web material dispensing assembly of FIG. 25;

20 FIG. 27 is a front perspective view of the vacuum belt and sealing bar assembly of the present invention;

FIG. 28 is a front perspective view of the vacuum belt and sealing bar assembly of FIG. 27 and the web having fastener tape segments of FIG. 17;

FIG. 29 is a side perspective view of two sets of dancer rollers through which the web having fastener tape segments of FIG. 17 is fed through the present

invention:

FIG. 30 is a perspective view of the web having fastener tape segments of FIG. 17 as it moves over a forming collar of a form fill seal machine;

FIG. 31 is a side perspective view of the forming collar of FIG. 30;

5 FIG. 32 is a front view of a form fill seal machine;

FIG. 33 is a close up view of sealing bars and a cutting knife of FIG. 32;

FIG. 34 is a top plan view of laminate material used in the manufacture of fastener tape:

10 FIG. 35 is a side cross-sectional view of an interior cap sealed to a base web of a partially processed fastener tape assembly;

FIG. 36 is a side cross-sectional view of the partially processed fastener tape assembly of FIG. 35 after a folding operation;

15 FIG. 37 is a side cross sectional view of the partially processed fastener tape assembly of FIG. 36 having a fastener sealed to the sealant layer of the base web;

FIG. 38 is a side cross sectional view of the partially processed fastener tape assembly of FIG. 36 having a fastener sealed to the interior cap at ends thereof;

20 FIG. 39 is a side cross sectional view of a variant of FIG. 37 having a sealed header portion thereof;

FIG. 39a is a top plan view of a reclosable bag utilizing the web of FIG. 35;

FIG. 40 shows a variant of the top of the bag of FIG. 19 in which gripping flanges are provided above an adhesive seal sealing the bag wall together;

FIG. 41 is a diagram of an apparatus for forming the fastener tape illustrated in FIG. 20, 21 and 23;

FIG. 42 is a side cross sectional view of a variant of the fastener tape described herein having a non-sealing nitrocellulose coating thereon; and,

5 FIG. 43 illustrates a top plan view of a variant of a top portion of a reclosable bag of the invention.

FIG. 44 is a front elevational view of the improved reclosable plastic bag of the present invention;

10 FIG. 45 illustrates a perspective sectional view of an improved reclosable plastic bag of the present invention of FIG. 44;

FIG. 46 is a perspective view of a vertical bag forming, filling and sealing apparatus for manufacturing bags of the present invention;

FIG. 47 is a perspective view of a roll of web of the present invention;

15 FIG. 48 is a side cross-sectional view of an optional recloseable flange of the present invention;

FIG. 49 is a partial side cross-sectional view of the recloseable flange of FIG. 48 connected to a web wall;

FIG. 50 is a partial side cross-sectional view of an optional recloseable tape of FIG. 51 in an assembled bag of the present invention;

20 FIG. 51 is a side cross-sectional view of an optional recloseable tape of the present invention;

FIG. 52 is a partial side cross-sectional view of the recloseable tape of FIG. 51 connected to a web wall;

FIG. 53 is a partial side cross-sectional view of the recloseable flange of

FIG. 48 in an assembled bag of the present invention:

FIG. 54 is a side view of a variant of the flange of FIG. 48:

FIG. 55 is a side cross sectional view of the flange of FIG. 54 in an assembled bag of the invention:

5 FIG. 56 is a perspective view of an apparatus to manufacture web material that is used with the vertical bag forming, filling and sealing apparatus of FIG. 46; and,

FIG. 57 is a side cross sectional view of the bag of FIG. 53 upon severance of the top portion thereof.

10

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a schematic representation of system 120 of the present invention for sealing tape 100 to web 110. The proper feeding, locating and sealing tape 100 at predetermined locations on base web 110 are important aspects of system 120. System 120 is reliable and capable of repeatedly performing steps with high throughput and with low cycle times. The manner in which tape 100 is fed, and positioned for sealing onto base web 110 is critical to achieving accurate secure sealing of tape 100 to web 110. To this end, base web 110 is indexed at indexing station 130, via servo motor 140. Servo motor 140 has control over acceleration, speed and deceleration of web 110.

15 20

As shown in FIG. 4, in an alternative embodiment, the movement of web 110 in the direction of the arrow 112 in FIG. 1 creates air movement over web 110 affecting anything that is attempted to be passed over it, such as tape 100.

The tendency is to pull the leading edge of tape 100 in the direction of the movement of base web 110. Tape 100, which is generally about 1" to 2-3/4" wide, effectively floats on current of air 180. At the end of the tape delivery 190, tape 100 is in a stretched position 320 across web 110, assuring squareness for
5 positioning onto base web 110. By "pinning" or staking tape 100 at a stretched corner, then pinning or staking it at a corner at the opposite end of tape 100, sealing can be accomplished with tape 100 square and in register with base web 110. Seal 114 is transverse to web 110 and parallel to the fastener that is attached to tape 110.

10 In the alternative embodiment, it has been determined that the following sequence of steps rapidly and accurately feeds, positions and seals tape 100 onto web 110:

1. Driving tape 100 forward using a set of zipper grooved rubber nip rollers 150 connected to stepping motor 160 at stepping station 170.
- 15 2. Carrying tape 100 transversely across web 110 with a curtain or stream 180 of air directed above and below tape 100 material from air supply 105, so as to eliminate the influence of base web 110, which is moving concurrently beneath tape 100 and at a right angle thereto.
3. Stopping the air current or curtain of air 180 at delivery end station
20 190, and concurrently pinning loop side corner 200 of tape 100 to base web 110 (FIG. 1A) before the tape 100 is chopped or cutoff at cutting station 210.
4. Pinning the tape 100 material at opposite end 230 (FIG. 4) at cut 220 is being made and, holding the tape 100 material in position to be sealed at positioning station 240 with pinning devices 260.

5. Sealing single lip 250 to base web 110 with a sealing device. (e.g. fastener segment attachment assembly 2101), while pinning devices 260 continue to hold severed tape piece 270 (FIGS. 1 and 4) in position, substantially square with base web 110.

5 6. Continuing to hold the tape with pinning devices 260 while the seal bar lifts away from the sealing position, effectively allowing the sealing bar to strip away from the seal.

7. Releasing pinning devices 260 (Pinning devices 260 include pneumatically operated rubber boots 310, which are generally about 1" square).

10

It has been determined that the following sequence of steps rapidly and accurately feeds, locates, cuts and seals tape 100 onto web 110.

1. Controlled by the level of take up dancer 520, a signal to index base web 110 and index tape 100 is given.

15 2. A servomotor 469 drives the tape 100 forward via the nip drive 470 of Tape Drive Assembly D-23587. (2107)

3. The leading edge of the tape 100 is driven into the vacuum belt 2132 in Vacuum Drive Assembly D-23625 (2167). Vacuum openings 2049A in the belt 2132 attach to the skirt area above the zipper 980 tape 100. The Vacuum
20 belt 2132 is driven slightly faster than nip drive 470 roller surfaces 2113-17 and carries the leading edge of the tape 100 to its farthestmost position in a stretched manner.

4. After driving the tape 100 the distance desired, the Tape Cutter Assembly C-23695 (2109) is activated to clamp and cut tape 100.

5. As the cutter 2109 clears to return to its uppermost position, the leading edge of the next piece of tape 110 is lifted clear of the cutting slot 2129A to avoid a potential jam on the next feed cycle and so as to be aimed properly for transference to the vacuum belt 2132. Concurrently the cutting ledge moves clear to allow the trailing edge of the tape piece just cut to lay flat for sealing.

6. The tape 100 is sealed to the base web 100 via the sealing bar which is part of Assembly D-23625. (2167) The sealing bar 2159 clears and the cycle is ready to be repeated. The trailing edge of the piece of tape 100 just attached to the base web 110 does not interfere with the lifted leading edge of the tape on next feed cycle due to the leading edge feeding over the trailing edge being pulled away in a transverse direction.

7. Vacuum remains on and seal bond strength of tape 100 to base web 110 allows separation of the tape skirt (flange) 1070 from vacuum belt 2132 when the base web 2032, 2154 indexes. This allows vacuum belt 2132 holding strength to remain constant continuously and prevents time delays to build up vacuum strength after being shut down.

The invention also provides an apparatus 1140 and method for forming and driving web 340 (web 110 having tape 100 sealed thereto) downwardly along the outside of tube 350 (which is part of a vertical form, fill and seal machine), making back seal 360 and making cross seals 370, 380. Each end 230, 235 of the severed tape piece 270 must be sealed in some manner, or the severed tape piece 270 will, simply, separate at its first opening and realignment will be very difficult. To solve this problem, the ends 230, 235 of our zipper tape piece are "staked" ultrasonically.

The invention further provides a device 400 for coordinating bagger 410 and tape applicator 420. It is important to coordinate the operations of bagger 410 and the operations of tape applicator 420, because uniform web tension must be maintained between these operations, or web tracking will be lost.

5 As partially illustrated in FIG. 1 and 2, assembly 430 is responsive to device 400 in one variant and delivers uniformly tensioned web 440 to bagger 410 and takes up the material being fed by the tape applicator 420, while simultaneously maintaining good tension all the while. The three sections of assembly 430 are a spring loaded three loop dancer 490 with a photo sensor 460
10 which reads the position of the dancer 490 and, when ready, starts the cycle of tape 100 application; a nip drive 470, for feeding the tape 100 (FIG. 29) and, a second three loop dancer 2136 (as shown in FIG. 29) between the nip drive 470 and the bagger 410 (FIG. 1) which controls the nip drive 470.

Indexing of the bagger 410 and indexing of the tape applicator 420 are
15 independent. Bagger 410 indexes, causing the three loop dancer 490 to rise. A proximity switch (not shown) and a cam causes nip drive 470 to pull material 440, thereby lowering arm 520 on the dancer 490. When additional material 440 is pulled through the nip 470, the upstream dancer arm 520 rises causing coils 510 in springs 521 to stretch, under tension. Photo sensor 460 then sees flag 570 on
20 arm 550 of the dancer 490, which causes tape applicator 420 to index. The coils 521 under tension pull arm 520 down to receive material 340 being indexed into three loop assembly 490. The process is then continually repeated. As a light a tension as possible is used on the spring so that little resistance to the movement of the tape is applied, thereby reducing the tension on the tape and resistance to

the inertia of the tape moving forward. As a result positioning of the tape is more accurate throughout the system.

FIG. 3 illustrates a tape applicator program 580 that executes the following steps of the routine: 102 -- Base web 110 indexes to eye spot 590, via servo motor 140; 202 -- Tape 100 is fed, via stepping motor 160; 303 -- vacuum belt 2132 carries tape 100 for positioning 404 -- Tape 100 is cut, and sealed to base web 2032, 2154. 505 - Actuate seal 280 to seal tape 100 to base web 110.

Another aspect of the invention provides for an attachment of tape applicator 420 to a winder 600 (not shown). This allows bagger 410 to function with pre-applied tape. There exists substantial demand for zippered roll stock 630 with tape 100 already sealed onto base web 2154 to be run on separate baggers. This approach to zippered packaging is not a replacement for in-line capability, but can be used as another option.

System 120 described above optionally feeds a winder 600 (not shown), as well as bagger 410 with, practically, no modifications. In these cases, the packer or the converter could be the user of the equipment. This approach allows any converter to provide a customer-packer with preapplied zippered roll stock 630 enabling the converter to obtain base web business he would not ordinarily get. The packer runs preapplied zippered roll stock 630 for multiple baggers without having to provide tape applicator 420.

The invention also provides for methods of treating the internal loop or flap area 1060 of tape 100 to create a non-sealing characteristic thereof as illustrated in FIGS. 6 and 7. The inside surface of the loop or flap area 1060 of the tape 100 material is treated to make it not seal in bagger 410 during the jaw sealing process

1260. In one variant, the inside loop area 1060 is treated to be non-sealable or, in another variant, the inside flap areas 1060 are treated to be non-sealable.

There are several ways in which this is accomplished, including electronic surface (corona-style) treatment, non-sealable printing materials application, laminated, or sealed barrier (non-sealable) strip application onto tape 100 material
5 between zipper halves, 720, 730 and insertion of barrier (non-sealable) strip 740 into loop (flap) area 710 (FIG. 8).

In one variant, as seen in FIG. 9, the invention includes frangible opening 750, used when the product packaged does not require hermetic seals, such as IQF
10 (instant quick freeze) vegetables and/or fruits. For items not requiring hermetic seals, such as IQF vegetables, where holes are punched to get air out of the bag and release CO₂, frangible opening 750 is desirable as opposed to cutting a top seal 830 off with scissors.

As illustrated in FIGS. 9-11, opening is created during tape 100
15 manufacturing. Top end 760 is slit open during manufacturing. The tape material 100 is constructed from a single-layer of polyethylene with additives such as ethylene vinyl acetate to facilitate sealing. The application of tape 100 results in a finished package 1 as depicted in FIG. 10. The perforating operation to create frangible opening 750 is incorporated into the sealing jaws 1260 of the bagger 410,
20 which also seals the cross web tape loop 880 the top seal 830 and bottom sealer 832 of the bag 1.

As illustrated in FIGS. 9-13, flanges 770, 780 having fastener profiles 720, 730 thereon are sealed to the inside walls 810, 820. Flanges 770, 780 are sealed to walls 930, 940 below top seal 830 at seals 790, 800. Frangible opening 750 is

disposed below top seal 830 and above flange 780 (FIG. 10).

The invention further includes a process to make pre-applied zippered tape roll stock 630 (FIG. 5). The tape 100 material is optionally applied in-line with the bagger operation. Preapplied zippered roll stock 630 is also provided by
5 adding a winder 600 to the tape applicator 420 system 120.

The invention also includes variants for "chip" industry applications. The invention includes an "easy opening" feature for plastic bags. As shown in FIG. 12, chip bag 840 carries very thin sealant layer 850, commonly about 2/10 of a millimeter in thickness. Chip bag 840 includes a reclosable strip 860 just below
10 separable opening portion 870. Separation of the walls of opening portion 870 exposes reclosable opening flanges 770, 780, to the environment if the tape loop 760 (FIG. 9) is slit apart during its manufacture. FIG. 12 also illustrates the location of sealing bars 2159. Sealing bars 2159 seal at least a flat, unprofiled portion of flanges 770, 780 to the bag 840 walls.

15 In a preferred embodiment, tape loop 880 is slit open during manufacturing. Inside surfaces 890, 900 on flanges 770, 780 (FIG. 13) are treated to be unsealable.

Chip bag 840 is manufactured using the following steps: Outside surfaces 910, 920 on flanges 770, 780 include laminate surface sealant compatible with
20 chip bag inside bag surfaces 930, 940 (FIG. 13).

As depicted in FIG. 10, outside surfaces 910, 920 of tape assembly 950 are sealed to chip bag inside wall surfaces 930, 940, respectively. Profiled reclosable strip 860 (FIG. 12) having zipper halves 720, 730 are between flanges 770, 780 in an interlocked arrangement. Top seal 830 FIG. 10 is formed from material used

to make easy open chip bag 840 seals (FIG.12). Bottomseal 832 (not shown) is formed concurrently.

In the case where packaging material 960, e.g. web stock, has a "different" sealant layer 970 from zipper 980, a coextruded or laminate, tape material 1010 is applied to material 960 (FIGS. 14-15). The fastener side 1005 contains compatible LDPE (low density polyethylene) surface 1000 and the opposite side 1020 is layered with material 1030 that is compatible with the sealant layer 970 of the packaging material 960, such as a potato chip bag 840. Opposite side 1020 is compatible with sealant layer 970 of packaging material 960. Inside surface 1000 is constructed easy sealing to zipper 980. The inside loop area 1060 is treated after zipper 980 is sealed in and cannot be sealed to itself. The outside surface 1030 remains sealable and compatible with the inside surface of packages, to effect the desired seal to the package. "Cut here" instructions or other indicia are provided so that the user can expose fastener 980 upon severance along the indicated lines (FIG. 15).

In yet another aspect, the invention provides an apparatus 1140 to make reclosable tape 1010 (FIG. 14) or flange zipper material 950 (FIG. 13) and wind it into rolls. In one variant, tape 1010 has tape portion 1090 of about 3/4" of an inch in length and tape portion 1100 about 1-1/4" in length is treated to be non-sealable. Tape 1010 is formed from about 3 millimeter stock. In another variant, flange 1110 is manufactured (FIG. 9). Flange 1110 has flange portion 1120 which is about 3/4" in length, and flange portion 1125 that is about 1-1/4" in length. The inside high flange area portion 1130 is treated to be non-sealable. Either tape 1010 or flange 1110 are affixed to fastener profiles and processed as described

herein.

As shown in FIG. 1 Apparatus 420 is provided, for indexing sealing tape 100 or flange 1110 to web 110. Apparatus 420 is located behind (or upstream) of form, fill, seal bagger 410. Apparatus 420 unwinds reclosable tape 100 or flange material 1070, indexes, punch holes, and indexes tape 100 again to a location centered above the backside 1160 of the intended front panel 1170 of base web material 2154 (cross web) and cuts tape 100 or flange 1110 to a length that is just shy of the width W of front panel 1170 of the intended bag 1 (FIG. 1).

Concurrent with the steps described above, the apparatus 1140 feeds (indexes) base web 110 to a position that allows registration of the tape 100 or flange 1110 to just below the intended top portion 1090 FIG. 14 of the finished bag 1. The next step of the method involves sealing as much of the lower flange area 1200 (FIGS. 6 and 7) and the side of the loop 1202 adjacent to the inside surface of the front panel area 1170 to the inside surface 1220 of web 110 as is practical. Step three of the method is to provide web 110, now called web 340 to bagger 410. In bagger 410, in addition to making the normal cross sealing and cutting operations, the sealing bars 2159 are modified to seal the opposite side of the loop (or flange) areas 770, (optionally 780), to bag wall 2004 and 2028 1265 having longitudinal seal 1267 thereon (FIG. 1). It is appreciated that the width of tape 1010 or flange 770 permits wall sections 775 and 785 to be sealed to front panel 1170 and back panel 1265 of bag 1 relatively effortlessly, since substantially smooth, parallel, and unprofiled wall sections 775 and 785, and front panel 1170 and back panel 1265 are sealed together as illustrated in FIG. 16 utilizing sealing means 1260.

As illustrated in FIGS. 14 and 15, the invention includes a tape 1010 for attachment to a web. The tape 1010 includes a zipper compatible inside portion 1000 for connection of zipper 980 to the zipper compatible, inside portion 1000, and an outside portion 1030 compatible with sealant layer 970 of packaging material 960 for connection of outside portion 1030 to sealant layer 970. In one variant the zipper compatible inside portion 1000 and the outside portion 1030 are incompatible. The zipper compatible inside portion 1000 is compatible with low density polyethylene compatible. The inside loop surface 1060 is treated so as to be incompatible, i.e. virtually non-sealable during the sealing process.

In a variant, a simplified method of manufacturing the tape 1010 described above is provided that includes the step of coextruding a first base tape 2210 material to obtain zipper compatible inside surface portion 1000 and a second base tape 2210 material to obtain outside surface portion 1030. Optionally, the method includes the step of fusing the zipper compatible inside portion 1000 to the outside portion 1030 to obtain a laminate structure (Fig. 14). As shown in Fig. 5, the invention includes a web 440 for making reclosable bags 2001 comprising the tape 1010 on flange described hereto.

FIG. 16 illustrates an exploded cross section of a portion of reclosable bag 2001 of FIG. 19. Reclosable bag 2001 has a bag body 2003 with bag top end 2000 (FIGS. 16 and 19) and bottom end 2059. Bag 2001 has bottom seal 2060 and back seal 2062, and confronting bag walls 2004, 2028. Reclosable bag 2001 includes fastener tape segment 2047 (FIGS. 16-19) sealed to confronting bag walls 2004, 2028 at seals 2002, 2008, and 2030 in the finished bag 2001. Reclosable bag 2001 optionally includes indicia 2054 indicating where bag 2001 should be cut

to provide a user access to interlocked fastener strip assembly 2048. It is appreciated that bag 2001 can be used in many applications including, but not limited to, snack bag applications.

Fastener tape segment (2047) has an interlocked fastener strip assembly
5 2048 including fastener profile strips 2012 and 2022. Strips 2012 and 2022 are not sealed to confronting bag walls 2004 and 2028. Fastener strip 2012 is sealed to film strip 2006 at continuous seal 2010, and complimentary strip 2022 is sealed to film strip 2026 at continuous seal 2024. Film strip 2006 is sealed to bag wall 2004 at continuous seal 2002, and film strip 2026 is sealed to bag wall 2028 at
10 seals continuous seals 2008, and 2030. Barrier material strips 2014, 2020 are interposed between film strips 2006, 2026. It is appreciated that, as shown in FIG. 16, fastener 2012 is sealed to wall 2004 only at seal 2002 and sealed to strip 2026 at seals 2038, 2044. Thus, a portion of strip 2004 and fastener 2012 are free to move relative to wall 2004. Barrier material strip 2014 is sealed to film strip 2006
15 at seals 2016, 2050. Barrier material strip 2020 is sealed to film strip 2026 at continuous seals 2018 and 2052. Barrier material strips 2014, 2020 are made from material that is not capable of sealing to itself at temperatures at which film strips 2006, 2026 would seal to bag walls 2004 and 2028. It is appreciated that seals 2002, 2008, 2010, 2016, 2018, 2024, 2030 can be made by conventional methods
20 known in the art.

It is understood that reclosable bag 2001 is generally formed in a form, fill and seal machine (as shown in FIG. 1), in which walls 2004, and 2028 are formed from a base web 2032 having a longitudinal direction of flow in the bag formation process as indicated by arrow 2045 (FIG. 17). Base web 2032 is joined to itself

at back seal 2062 (FIG. 19) that extends between bag top end 2058 and bottom end 2059 along one side of bag body 2003.

As shown in FIG. 18, fastener strips 2012 and 2022 are formed from continuous one-piece extruded resiliently flexible plastic profiled reclosable fastener strip material. Fastener strips 2012 and 2022 are also sealed one to another at seals 2038, and 2044 (FIG. 17) so that the strips are in alignment with one another and interlocked together. It is appreciated that provision of seals 2038, 2044, in combination with the other seals herein, provide a hermetic seal so that the only access to the interior of bag 2001 is provided upon releaseably disengaging fasteners 2012, 2022. FIG. 17 illustrates base web 2032 for making a plurality of reclosable bags 2001. Base web 2032 is formed from conventional materials used in the snack bag and plastic bag industries such as polyethylene, paper/poly/foil/poly laminates, propylene, and other laminated and coated material. The base web 2032, is utilized in the method and apparatus 1140 described herein, and in FIGS. 20-33. Base web 2032 is an elongated roll of film having a longitudinal direction of formation indicated by arrow 2045. Base web 2032 has secured thereto a fastener tape segment 2047 at transverse fastener tape segment seal 2036. In a preferred embodiment, seal 2036 extends continuously from fastener tape segment end 2043 to fastener tape segment end 2045. In an alternate embodiment, seal 2036 includes a plurality of spot seals for securing strip portion 2046 of fastener tape segment 2047 to base web 2032. It is appreciated that securing strip portion 2046 is sized and dimensioned to provide a large vertical sealing area in which transverse fastener tape segment seal 2036 can be disposed. Seal 2036 can be placed at any location in portion 2046. Seal 2036 can also

include spot seals at any location in the sealing area. Hence, optional film lip 2034 (FIGS. 16-18) located below transverse fastener tape segment seal 2036 can be of varying height, but is preferably about an eighth of an inch in height. In another variant, optional film lip 2034 is omitted.

5 Non-barrier containing upper portion 2040 (FIG. 17) of film strips 2006 and 2026 (FIG. 16) has an optional gap between the bottom edges 2041 and 2043 of barrier material 2014 and 2020 and fasteners 2012 and 2022. Barrier containing upper portion 2042 (FIG. 17) includes the portions of film strips 2006 and 2026 upon which barrier material 2014 and 2020 are disposed.

10 As shown in FIG. 17, secured to web material 2032 at bag length intervals L are a plurality of fastener tape segments 2047, sealed along the length of web 2032 and extending lengthwise across about less than half the width of web 2032. The fastener tape segments 2047 are oriented substantially perpendicularly to the direction of formation of the bag 2001, and are located near the ends 2063 and
15 2065 of the bags into which web material 2032 is formed.

 It is appreciated that fastener tape segment 2047 and the securing thereof to web 2032 prior to the formation of bag body 2003 in a form fill seal machine 2138 has a number of benefits. First, it is not necessary to directly seal the narrow individual fasteners 2012 and 2022 to the web. Sealing bars 2159 of
20 sealing bar assembly 2167 (FIG. 20) seal securing strip portion 2046 to web material 2032 at seal 2036 FIG. 18. Further, as the web material 2032 (having fastener tape segment 2047 thereon), travels in the direction of arrow 2045 onto the forming collar 2140 of a form fill seal machine 2138 (FIGS. 30-31), there is a minimal risk that fasteners 2012 and 2022 (FIG. 18) will come apart when the

web material is being processed. Further, seals 2038 and 2044 FIG. 17 secure fasteners 2012 and 2022 to each other, to prevent undesirable movement of one fastener in relation to another. Seals 2038 and 2044 also improve overall rigidity of segment 2047 and maintain fasteners 2012 and 2022 in alignment with one another during the bag formation process. It is appreciated that fastener tape segment 2047 may also function as an air foil as the current of air flows over the tape segment 100A in a direction opposite that indicated by arrow 2045. Various types of barrier material can be used herein. However, the barrier material strips 2018 and 2020 do not seal one to another during the bag formation process, but readily seal to film strips 2006 and 2026 (FIG. 16).

FIGS. 20-33 are color photographs of an apparatus 1140 for manufacturing and sealing tape segments 2047 to base web 2179 and then using a form fill seal machine 2138 for making bag 2001 of the present invention. The form fill seal machine 2138 includes a zipper tape feed 2199 portion as shown in FIGS. 20-24. The zipper tape feed portion 2199 includes tension arm 2100 (FIGS. 20-24) for tensioning finished fastener tape 2240 (from which segments 2047 are formed) and for signaling fastener spool drive 2114 (FIG. 20-24) to rotate spool 2108. Fastener tape 2240 unwinds from zipper spool 2108 (FIGS. 20-24) and advances over roller 2070 and under a roller on floating arm 2106 (FIGS. 20, 21, 22, and 23) connected to film synchronizer 2112 (FIG. 20), and over roller 2174. Fastener tape 2240 then passes under ultrasonic sealing horn 2102 (FIGS. 20, 20A, 22, 23, and 24) where seals 2038, and 2044 are formed, through tape registration assembly 2105, and into tape drive assembly 2107. Tape registration assembly 2105, in combination with tape drive assembly 2107 advances tape 100 sequentially into

tape cutter assembly 2109. Proper tension is maintained by rollers 2111, 2113 and 2115 (FIG. 20A) in tape registration assembly 2105, which adjusts tension based on the position of three loop dancer 490, and activation by photo sensor 460 (Fig. 1). Tape drive assembly 2107 includes nip drive 470 for feeding tape 100, as
5 required into tape cutter assembly 2109. Nip drive assembly 470 includes rollers 2111A, 2113A and 2115A for advancing tape 100. When cutting die plate actuator 2117 pushes die plate 2119 forward under tape 100. Cutter blade 2121 then cuts downwardly through tape 100 by means of an air piston 2123 and shaft 2125 having blade 2121 attached to the distal end 2127 thereof. After full
10 extension of shaft 2125, cutter blade 2121 is retracted, as is die plate 2119. A stripper 2129 helps strip tape 100 from blade 2121 and in fact urges tape segment 100A into tape sealer vacuum assembly 2131. Thus, fastener tape 2240 is cut into predetermined sections the length of segment 2047. It is preferred that segments 2047 be about less than half of the width of base web 2179. The control
15 synchronizer 2110 (FIG. 23) synchronizes the feeding of fastener tape 2240 with the feeding of base web 2179 (FIG. 25) so that segments 2047 can be properly processed as described and sealed to base web 2179. The various operations are actuated by air pressure controls 2104 (FIGS. 20, 21, and 22).

Segment 2047 is next fed into fastener segment attachment assembly 2101
20 (FIG. 28). Fastener segment attachment assembly 2101 secures segment 2047 to base web 2179 and forms seal 2036. Base web 2179 advances into machine 2138 under the control of film speed quantity control 2116 (FIGS. 25 and 26). Base web 2179 is mounted on web spool drive 2118 (FIG. 25) that includes positioning shaft 2120 (FIG. 26). Base web 2179 travels through dancer rollers 2126 (FIG.

26) prior to arrival at fastener segment attachment assembly 2101 at the rear 2122 thereof.

Segment 2047 is properly positioned and sealed on base web 2179 with a vacuum belt and sealing bar assembly 2131 (FIGS. 20-B, 26 and 27) having a front portion 2124 and rear portion 2122. The assembly 430 forms seal 2036 and positions segment 2047 on base web 2179 at an appropriate location. FIG. 26 illustrates the rear portion 2122 of vacuum belt 2132 and sealing bar assembly 2131. FIG. 27 illustrates that front portion 2124 of vacuum belt 2132 and sealing bar assembly. FIG. 28 illustrates vacuum belt 2132 and sealing bar assembly front portion 2124 including a belt drive 2169 for vacuum belt 2132 (FIG. 28) and vacuum belt 2132 (FIG. 28) which advances segment 2047 and properly positions segment 2047 on base web 2179. Four vacuum zones 2049 - 2051, 2053 and 2055 in vacuum manifold 2056 maintain tight control of segment 2047, and then in turn reverse air pressure and force segment 2047 fixedly against web 2179. Vacuum belt 2132 and sealing bar assembly 2131 include a horizontal sealing bar 2059, a tape support shelf 2161 and a sealing bed 2162. Sealing bar 2059 includes a heating element 2165, and is mounted on a sealing bar press assembly 2167 which forces sealing bar 2059 downward against tape segment 100A for sealing to base web 2047. Vacuum belt assembly 2131 also includes a belt drive 2169 which advances tape segment 100A (2047) into the desired position over base web 2179. Prior to sealing, tight control of positioning of tape segment 100A is maintained by manifolds 2049, 2051, 2053 and 2055, as is the vacuum belt 2132 is advanced, controlled by tape registration assembly 2105 and tape drive assembly 2107.

As shown in FIG. 20-A, a roller drive 2130 for vacuum belts 2132 is shown. Roller drive 2130 comprises a servo motor 469 contained in container 2130A having a drive shaft 2130B. Shaft 2130B has a sprocket at 2130C on the distal end thereof. A rubber belt 2130D is disposed around sprocket 2130C and extends to a hub 2115A on nip roller 2115. Hub 2115A has a similar sprocket 2115B so that as shaft 2130B rotates it causes rotation of shaft 2130B. When rubber belt 2130D is driven it causes rotation of nip roller 2115. At the same time nip roller 2115 has a double hub 2115C so that a second belt 2130E extends therefrom over idle roller 2130F and drive roller 2130G on vacuum belt assembly 2130. It should be noted in this regard that idle roller 2130F could be a drive roller for use in a mechanically powered cutter assembly (not shown), replacing air piston 2123 (FIG 20-A), if desired. Belts 2130E are again driven by hub 2115A, which drives belt 2130E which is mounted on sprocket 2130H, thereby causing rotation of drive shaft 2130G. Thus, tape 100 is advanced by nip rollers 2113 and 2115, incrementally under cutter blades 2121, then stopped at the appropriate distance. Cutter blade 2121 then is pushed downwardly by air piston 2123 as is clamp 2121A. Clamp 2121A also forces spring loaded stripper 2109A downwardly and out of the way of cutting blade 2121. After cutting blade 2121 has cut tape segment 100A, air piston 2123 is reversed so that shaft 2125 is pulled upwardly, thereby releasing Clamp 2121A and spring loaded stripper 2109A. Servo motor 469 than is actuated causing rotation of hubs 2130G, 2115A and 2130B so as to cause advancement of nip roller 2115 and vacuum belt 2132. Vacuum belt 2132 then picks up the leading edge of cut tape segment 100A and advances it over web 110, (FIG 1) where heat sealing is applied as shown in figure

20A. It should be noted that the spring loaded stripper 2109, when it moves upwardly causes the leading edge of tape segment 100A to spring upward against vacuum belt 2132 so as to facilitate advancement of tape segment 100A and prevent jamming of the segment 100A in the slot 2109B in retractable die plate 2119 (FIG 20A). Further shown in (FIG 20A) is a ledge 2171 for which prevents the movement of web 110 below vacuum belt 2132 from causing displacement of tape segment 100A on vacuum belt 2132, as advancing tape segment 100A into position over web 110. The ledge 2171 is constructed of Delrin brand thermoplastic elastomer so as to provide a slick surface and to eliminate static electricity created by the movement of web 110 approximate thereto. Alternatively, other materials such as teflon (polyethylene-terephthalate) could be used.

After the segment 2047 is sealed to base web 2179 rubber nip roller 2128 (FIGS. 27 and 28) advances the base web 2179 having segment 2047 forward. The base web 2179 having segment 2047 is then fed through form fill seal machine 2138 dancer rolls 2136 (FIG. 29) into the form fill seal portion of machine 2138 (FIG. 32). The base web 2179 having segment 2047 sealed thereon is fed over forming collar 2140 (FIG. 32) and filling tube 2142 (FIGS. 30-31) by the belts 2181 and 2183 shown in FIGS. 32. Back seal 2062 is formed. Sealing bar 2159 and cutting knife assembly 2144 (FIG. 33) form seals 2056, 2058, and 2060 simultaneously and sever the finished bag. Although it cannot be seen in FIG. 33, sealing bar 2159 includes two sets of sealing bar 2056' and 2058'. Seal bar 2056 forms seal 2056. Seal bar 2058' forms seal 2058. Seal bar 2060' forms seal 2060. Knife 2144 cuts the partially formed bag between seal bars 2058' and

2060'. It is appreciated that this method of forming seals 2058 and 2060 with sealing jaws 2058' and 2060' provides a benefit. Seal 2058 having a width W at top portion 2000 is generally narrower than seal 2060 having a width W. This facilitates opening of the top end of bag 2001 by providing a weaker seal at the top end of bag 2001 than at the bottom end of the bag while simultaneously providing a hermetic seal of the top end of the bag and a stronger lower seal at the lower end of the bag. Hence, it is appreciated that the invention provides for a bag 2001 that requires a differential opening force to open the top end of the bag versus the bottom end of the bag.

10 FIGS. 35-38 illustrate a bag and method of forming a bag in a horizontal form fill seal machine 2138. A web of thermoplastic material which is preferably about 1 mil thick and is a laminate material is formed and wound on standard 3 or 6 inch cores to be used as interior end cap 2146. Interior end cap 2146 goes through an operation in which perforations 2150 are formed thereon as indicated in FIG. 34. The laminate material from which interior end cap 2146 is formed is a non-stretchy base thermoplastic material such as polypropylene with a thin sealant layer 2562 on one side thereof, or on each side thereof. The preferred width of the finished roll of interior end cap 2146 is about three and one half inches or less. The web material is perforated in the web direction as shown in FIG. 34.

20 A modified AMI-RD (reduced size applicator for connecting fastener and interior cap 2148 to web) applicator system 120 is used for the application of interior cap 2146 and webless fastener 2152 (FIGS. 37-39) to base web 2154 (FIGS. 36-38) for the manufacture of bags. The method of making the bags

includes the steps of sealing interior cap 2146 onto base web 2154 to obtain interior cap/web assembly 2148, center folding the interior cap/web assembly 2148 to obtain folded base web 2156 (FIGS. 36-38), introducing webless fastener 2226, 2152 between the opposing walls 2567 of the folded base web 2156 (FIGS. 36-38), and sealing fastener 2152 to opposing walls 2567. Fastener 2152 and header 3014 (FIG. 39) are sealed at the same RD station. In lieu of opening the web, as an RD system 120 ordinarily does, the folded base web 2156 is turned and delivered to a horizontal "shred" machine (not shown), in line and at the height desired. As shown in FIGS. 37 and 38, fastener 2152 can be sealed at the ends of interior cap 2158 (FIG. 37) or to a sealant layer of base web 2156 (FIGS. 35 and 37) at fastener seals 2162, 2164 (FIG. 39). Header seals 2166 (FIG. 39) and fastener seals 2162 and 2164 can be formed simultaneously or at different stations. The web is delivered, in-line and upright, to a horizontal machine.

The finished package is substantially flat and neat, improving package appearance, and the overall improving quality of the package. The function of opening the package is improved since the package is opened via the tear notch, (perforations 2150), and along the perforations 2150. Then, when header 3014 is completely torn off by the user, the opening tabs are completely intact and parallel. Since the package is more uniform, opening and reclosing the bag is made easier using the reclosable fastener 2152. The machinery for making the above referenced invention includes continuous moving operations that require less maintenance and result in more reliable operation.

Optionally, base web 2154 includes perforations 2151 that are complementary to and aligned with perforations 2150 of interior cap 2146. It is

appreciated that perforations 2150 and 2151 FIG. 39A allow a user to readily open the bag formed with these elements, and easily access the bag formed utilizing these elements. Perforations 2150, 2151 are preferably located between centerfold 2269 and fastener assembly 2152. In an alternate embodiment, perforations 2150
5 are omitted.

FIG. 39a is a top plan view of a reclosable bag 3060 made from the web of FIG. 35. Bag 3060 includes a header 3014, a bottom seal 3100, and side seals 3070, and 3080 forming bag body. Fastener assembly 2152 is positioned below perforations 2150 and 2151 so that when header 3014 is removed, a tear forms
10 along perforations 2150 and 2151 providing access to reclosable fastener assembly 2152.

FIG. 40 illustrates a variant of the top portion of bag 2001 that includes means for easy access to fasteners 2012, 2022. The top end of bag 2001 includes adhesive layer 2168 (FIG. 40) above fastener segment 2047 but below bag wall ends 3042, 3044. This adhesive layer 2168 is applied using conventional adhesives that are readily separated by the mechanical opening force generated by a user's fingers. This adhesive layer 2168 hermetically holds together and seals walls 2004 and 2028 during shipment and storage of bag 2001. Adhesive layer 2168 can be applied to web 2032 before the web moves onto the forming collar
15 2140. Opening of the bag 2001 to access interlocked fasteners 2012, 2022 is facilitated by provision of bag wall pull flanges 2170 and 2172 (FIG. 40) which are formed from bag walls, 2004 and 2028. It is also contemplated that the inside and/or outside surfaces 3046, 3048, 3050, 3052 of bag wall pull flanges 2170 and 2172 can be textured, ribbed or grooved so that gripping thereof by a user and
20

opening of the bag top can be facilitated.

FIG. 41 illustrates an apparatus 2000 for forming fastener tape 2240. Apparatus 1140 2200 is used to make fastener tape 2240 described herein using the methods described herein. Base tape 2206 is fed from roll of tape material 2202 onto dancer rollers 2208. Barrier material 2210 is fed from roll of barrier material 2204 onto dancer rollers 2212. Barrier material 2210 and base tape 2206 are aligned, and positioned with respect to each other. In one variant the center of barrier material 2210 is aligned with the center of base tape 2206. In another variant, the barrier material 2210 is positioned on base tape 2206 to provide for portion 2046. Barrier material 2210 and base tape 2206 are sealed to each other and advanced by belts 2214 and 2216. Sealing bars 2218 and 2220 seal barrier material 2210 to base tape 2206 at seals 2016, 2050, 2018 and 2052 to obtain a sealed barrier/base material assembly 3017. The seals may be continuous or periodic. Sealed barrier/base material assembly 3017 is next folded at fold station 2222. The barrier material 2210 is directed to the inside of the assembly 3017 and the base tape 2210 material is directed to the outside of the assembly 3017. Webless fastener 2226 is fed from roll of webless fastener 2228 and aligned and positioned between the base tape 2210 material as shown in the figures herein. Optionally base tape 2210 material 2206 may be fed by roller 2224. Belts 2230 and 2232 advance the materials and sealing bars 2234, 2236 seal the webless fastener 2226 (interlocked profiles 2012, 2022) to assembly 3017. The fold formed at fold station 2222 is slit at slitting station 2238 to provide the finished fastener tape 2240, which may then be rolled into a roll of finished fastener tape 2242, or used immediately. Preferably, the base tape material 2206 is about 3.5

inches wide while the barrier material strip 2210 is about 2 inches wide.

A method of making tape 2240 having reclosable fasteners 2226 thereon is provided. The method comprises the steps of supplying a continuous strip of tape 2206, a continuous strip of barrier material 2210, and a continuous strip of fastener 2226 having first and second interlocked fastener profile strips 2012, 2022; positioning continuous strip of barrier material 2210 on continuous strip of tape 2206; securing continuous strip of barrier material 2210 to continuous strip of tape 2206 to obtain a continuous strip of barrier tape 3017; folding, (off-center, or center folding) barrier tape to obtain a fold and two opposing barrier tape fastener strip connecting portions; positioning fasteners 2226 having first and second interlocked fastener profile strips 2012, 2022 between the two opposing barrier tape fastener strip connecting portions; securing the first interlocked fastener profile strip 2012 to one of said opposing barrier tape fastener strip connecting portions; securing the second interlocked fastener profile strip 2022 to the other barrier tape fastener strip connecting portion; and, slitting the fold to form two separate continuous strips of barrier material 2210 (strips 2014, 2020), and slitting the base web 2032, 2154 to separate the base web 2056 into strips of thermoplastic material.

The invention described herein which secures the segment 2047 to a base film is independent of the form fill seal apparatus 1140 ultimately used to form fill and seal bag 2001. Two sets of dancers 2134 and 2136 (FIG. 29) are used so that any bagger apparatus 1140 can be retrofitted. Barrier material 2210 is polypropylene on the inside and polyethylene on the outside so that seals 2018, 2052, 2016, and 2050 can be formed while the inside surfaces 3073 are non-

sealable one to another. In a preferred embodiment, the sealing side of barrier material 2210 has blended therein metalasine. The materials described herein are commercially available from Curwood Co., 220 Badger Ave., Oshkosh, Wisconsin, Atlanta Film in the State of Atlanta, and Print Pak, Inc.

5 In yet a further embodiment, it is possible to eliminate barrier material 2210. In this embodiment shown in FIG. 42, a substantially pure, food grade, nitrocellulose coating 3990 is applied to base tape material 2206 as shown in FIG. 42. The other method steps described above are performed to obtain the final fastener tape. Application of coating 3990 makes strips 2026 and 2006 (FIG. 16)
10 non-sealable to one another in the inside loop area which is ultimately slit. It is further contemplated that other food grade coatings may be used to render strips 2026 and 2006 non-sealable one to another.

FIG. 43 illustrates the top portion of a mono-polymer package 5003, as for IQF (instant quick freeze) vegetables. In this variant, the embodiment of fastener
15 tape as processed in FIG. 41 is used such that the tape has the substantially pure, food grade, nitrocellulose coating 3990 illustrated in FIG. 42. Web 2206 is folded onto itself so that fasteners 2012 and 2022 interlock. Web 2206 is then slit as described above to obtain tape 2240 but without the barrier material strips. Suitable inks can also be used to make the strips non-sealable to one another.

20 Seal 5000 is made with a bagger sealing jaw (not shown) in the shape of the seal illustrated in FIG. 43. Seal 5000 is disposed approximately 3/4" below top seal 5002 in a preferred embodiment. Seal 5000 is similar to top seal 2058 and bottom seal 2060 in the other figures, but in this variant top seal 5002 and bottom seal 2060 (not shown) can be of the same size. The extra layers of strips

2006 and 2026 (FIG. 16) that are sealed to bag walls 2028 and 2004, while they do create some extra thickness, do not create a thickness of material that is beyond the capability of the sealing jaw to properly seal, even when the bagger sealing jaw is in the same plane as the sealing jaws that create the top and bottom seals

5 2060. Due to the lack of thickness of the strips 2006, 2026, seal 5000 readily blends from four thicknesses to about two thicknesses. Hence, seal 5000 is continuous with no break in seal quality even though it comprises a step down from the four thicknesses to the two thicknesses.

In some application such as IQF that do not require the bag to be

10 hermetically sealed, there is no need to seal off the ends of the fastener strip. Seal 5000 extends to and through the side fold of bag 5003, as top seal 5002 and bottom seal 2060 (not shown) do. This allows seal 5000 to be made with the same seal bars, regardless of bag width. The finished package 5003 can be filled with its contents above the zipper profile line 5004. The fastener strip is sealed

15 to the front panel of bag 5003 and the product content of the package can be filled above and behind the profiles horizontal location, as the thin strip material will align itself with and be pushed against the front panel when being filled. The extra length of the package is the distance between the bottom of the top seal 5005 and the bottom of seal 5000. This distance is proportional to the accuracy of

20 bagger registration.

FIGS. 44 and 45 illustrate reclosable plastic bag 1 of the present invention. Reclosable plastic bag 1 includes a top end generally indicated by numeral 2 and a bottom end indicated by numeral 16. Bag 1 has a front wall 3, a back wall 4, and a seal 5 at top end 2 at which interlocking fastener profile lip 6 is sealed to

front wall 3 and sealed to back wall 4. The tri-laminate structure at top end 2 of walls 3, 4, and lip 6 increases the strength of top end 2 producing increased tear resistance at this portion of the bag during the manufacturing process and also when the bag is displayed at a retailer. Top end 2 optionally contains an aperture 14 that extends through walls 3, 4, and lip 6 that is used to hang reclosable plastic bag 1 on hooks in retail stores. Bag 1 also has seal 2' at bottom end 16 at which front wall 3 and back wall 4 is connected. Back wall 4 includes two vertical portions 52, 54 (FIG. 47) having ends 56, 58 thereof that are sealed to create seal 24.

Interlocking fastener lip 6 is sealed to front wall 3, and back wall 4 at top end 2 as indicated by seal 5 at top end 2. Sealing of lip 6 is an important feature of the present invention since the size, shape and location of lip 6 allow for a single simultaneous sealing step to be used to seal front wall 3 to lip 6, and lip 6 to back wall 4. The seals of the present invention are preferably made by heat sealing as is well known in the art to prevent air or liquids from entering or leaving bag 1. However, other forms of sealing can also be utilized herein. It is appreciated that the lip 6 can, in a variant, be disposed on the sides or bottom of bag 1 as required.

Interlocking fastener lip 6 forms a portion of interlocking fastener strip assembly 18 that includes first engaging member 7 and a complimentary engaging member 8. As illustrated in FIG. 45, complimentary engaging member 8 is illustrated as having a male engaging prong that releasably interlocks with engaging member 8 which is shown as a female receptacle. Male and female portions of members 7, 8 can be readily interchanged. Many types of fastener

assemblies are known in the reclosable plastic bag art and can be used with the present invention. Optionally, ends 20 of interlocking fastener lip 6 are heat sealed to front wall 3.

Lip 6 both reinforces top end 2 to prevent top end 2 from tearing where
5 walls 3, 4 are sealed to lip 6; serves to flexibly attach first engaging member 7 to bag 1, to support first engaging member 7, and to align first engaging member 7 with complimentary engaging member 8; and, serves as a fail-safe barrier to prevent or reduce the risk of contamination or release of the contents of bag 1 in the event of inadvertent or accidental separation of upper portion 9 from lower
10 portion 10 of front wall 3 along optional rupture line 11 which can be manually manipulated to separate upper portion 9 from lower portion 10. Preferably, score or rupture line 11 is frangible upon manual manipulation thereof by a user and is located above and substantially parallel to seal 12 at which complimentary engaging member 8 is joined to wall 3. Score line or rupture line 11 serves the
15 dual purpose of protecting the contents of the container and providing a safety seal to show that bag 1 has not yet been opened. Lip 6 can be formed of any material, but is preferably formed of the same material as the rest of bag 1. Lip 6 can further contain advertising, nutritional or gaming indicia thereon.

It is appreciated that lip 6 and front wall 3 further provide a pouch into
20 which coupons, product samples, and/or other advertising material (not shown) can be placed. As such a consumer first opens front wall 3 along rupture line 11 to expose the material in the pouch without opening up the contents of the larger storage volume in bag 1. It is further appreciated that this informational material is separated and protected from the contents of the remainder of bag 1 during the

shipping and display process. The pouch of bag 1 can also contain material that is to be used in conjunction with the contents of the larger storage volume, but that needs to be separated from the larger storage volume material until it is needed.

Multiple bags 1 as illustrated in FIGS. 44-46 are manufactured by supplying web material 32, whether single ply or laminated to a form, fill and seal machine 28 as shown in FIG. 46. Such machines are known in the art and include a combination bag forming and filling nozzle cylinder 29 adapted to receive products to be filled into the formed bags from a hopper 30. Bag making web 31 has thereon complementary engaging members 8 sealed to portions of bag making web 31 that will become the front walls 3 of bags 1 in the manufacturing process. The complementary engaging member is releasably interlocked to engaging member 7 either before or after member 8 is sealed to wall 3 at appropriate intervals. At this juncture, end 27 of lip 6 is not joined to wall 3. Web 31 is guided by means of guide roller 32 to the cylinder outer surface of cylinder 29.

At cylinder 29, a folding or wrapping arm device 33 guides and wraps web 31 about the cylinder 29 with the longitudinal margins of web 31 brought together into a longitudinal assembly which is sealed to form closure seam 24. Closure seam 24 is formed by vertical sealing bars 35 which move inward as indicated by numeral 37. Bars 35 then separate to release the heat sealed seam 24 of the closed bag forming tube of web material 31. Closed bag forming tube of web material 31 is advanced by means of a pair of horizontal, parallel bag end sealing bars 39 that reciprocate to clamp the bag web tube below the end of the cylindrical forming and filling nozzle member 29 and simultaneously seal the top end 2 of a filled bag section and the bottom end of a succeeding bag section.

It is appreciated that sealing bars 39 simultaneously seal front wall 3 to end 27 of lip 6, and end 27 of lip 6 to back wall 4 in a single step. Then sealing bars 39 still gripping the bag web tube move downwardly a bag section length as indicated by directional arrow 40 to pull and advance the entire bag making tube one bag length. As this step occurs, the next succeeding bag is filled with product dropped down cylinder 29 from hopper 30. As bags are sealed and pulled down, a cut off bar 41 cuts midway across seals 2' and 5, thus releasing the previously filled bags 1 which are handled as desired. Having completed its downward stroke cut off 41 returns to its starting position as indicated by arrow 43.

10 Bag 1 is airtight prior to the separation of upper portion 9 of front wall 3 from lower portion 10 of front wall 3 to gain access to recloseable fastener assembly 18. Generally, a user will manually separate upper portion 9 from lower portion 10 manually at score, rupture line or perforation 11. Separation of portions 9 and 10 will open up the first storage volume defined by upper portion 9 and lip 6, to the environment. Fastener assembly 18 is then manipulated to open the second storage volume of bag 1 to the environment. Optionally upper portion 9 of wall 3 is scored to form a flap that includes three score lines, e.g. score line 11 and two score lines perpendicular thereto that start at score line 11 and terminate at seal 5 (not shown). The flap includes upper portion 9 of wall 3 and is pivotally connected to bag 1 at seal 5. It is appreciated that provision of this flap allows for ease of access to fastener assembly 18.

The invention further provides a method of making reclosable bags that is more efficient and economical than conventional methods, and requires fewer method steps. Lip 6 is joined to walls 3, 4 in a single sealing step rather than

multiple sealing steps. As such the manufacturing process requires fewer sealing steps as only seals 5, 2', 12, and 24 are required to form the storage volume of bag 1 and also provide for the attachment of fastener assembly 18. It is further appreciated that two distinct storage volumes are formed using the same number of sealing steps.

Interlocking fastener lip 6 forming a portion of engaging member 7 is not sealed to walls 3 or 4 at this juncture but rather rests against the inside surface of front wall 3 and is attracted to front wall 3 by electrostatic forces. The fastener assembly (members 7 and 8) are suitably longitudinally spaced at intervals along web 31. Preferably, the width of fastener assembly is less than one half the width of web 31 so as to enable seal 24 to be formed. It is appreciated that the speed within which web 31 is fed into apparatus 28 is increased due to the consummation of multiple sealing steps simultaneously, and the time required to form, fill and seal a respective bag 1 is decreased.

As illustrated in FIG. 47, web 50 includes a multiplicity of flexible interlocking fastener lips 6 which are free of connection to web 50. That is, lips 6 simply rest on each respective sheet 55 of web 50 at this juncture. Each lip 6 is permanently connected to a fastener assembly 18, is integral therewith, or optionally can be releasably attached thereto. Each fastener assembly 18 includes an engaging member releasably connected to a complimentary engaging member 8. Complimentary engaging member 8 is connected to front wall portion 3 of web 50. The web or bag film of the present invention is commonly referred to as plastic film and includes polymeric materials as are known in the art. It is appreciated that sealing or connecting only complimentary engaging member 8 to

web 50 prior to formation of bag 1 or utilization of web 50 with apparatus 28 greatly simplifies and facilitates that manufacturing process. Sealing of lip 6 to front wall 3 during the formation of bag 1 provides numerous advantages in the manufacturing process including, by way of example, faster web feed times and
5 the like.

FIG. 48 is a side cross-sectional view of optional recloseable tape 150 used in bag 1. Tape 150 has inside loop surface 152 that is treated to be non-sealable. Many compositions are known in the art that can make a surface non-sealable. An exemplary such composition is lacquer. In this embodiment, lip 6 has bend 154
10 and opposite wall 156 and lower flange area 158. Both lower flange portion 158 and opposite wall 156 are sealed to front wall 3 of web 50 (FIG. 49). In a preferred embodiment, distance D is about 3/4 inches long and distance D' is about 1 1/4 inches long. It is appreciated that distance D and distance D' can be varied as required for the type of bag 1 manufactured (FIGS. 48 and 51).
15 Preferably, lip 6, bend 154, opposite wall 156, and lower flange area 158 are formed from one piece of plastic material.

It is appreciated that fastener or zipper 18 is completely sealed in the inside storage volume of bag 1 as illustrated in FIGS. 50 and 53. In this embodiment, bag 1 is free of tear tabs with perforations or tear strips. Rather, a dotted line 70
20 or other indicia is printed across bag 1, below or just below, top seal 5. Bag 1 is opened along dotted line 70 with scissors or other suitable cutting utensil, and used as a normal recloseable bag 1 upon severance of bag 1 along the dotted line 70.

It is appreciated that bi-laminate upper gripping portions 72 created by

sealing front wall 3 to lower flange area 158 and opposite wall 156, and lip 6 to back wall 4 greatly extends the life of the gripping portion 72 even after multiple continued openings and closings of fastener 18, and provides a reinforced base upon which both portions of fastener 18 are mounted. It is further appreciated that

5 bi-laminate upper gripping portions 72 are more rigid than either walls 3, 4, lip 6, or opposite wall 156 alone, and facilitate the direct vertical insertion of products back into bag 1 through mouth 78 as indicated by arrow 74 after severance of bag 1 along line 72 and opening of fastener 18 (FIG. 57). Bag 1 provides for a bag 1 having varying degrees of flexibility. These varying degrees of flexibility

10 include more flexibility at front wall portion 3' below lower flange 158 and at back wall 4 below fastener 18 relative to the upper portion of bag 1 that includes the various tape 150 or flange 60 sealed thereto. This feature allows the storage volume 76 to readily adapt to the size and shape of products contained therein while simultaneously providing less flexible upper gripping portions 72 that

15 facilitate alignment of the fastener 18 elements one with another, and closure thereof. The arrangement of the elements of the invention as described herein eliminates the risk of outside contamination during the time of storage of bag 1 or during store display due to the fail-safe recloseable features described herein. Only, when top seal 5 is cut off bag 1 does the recloseable fastener 18 reclosably

20 seal off the bag contents in the bag storage volume without the protection of top seal 5. Upper temporary storage volume 80 (FIGS. 50 and 53) optionally retains advertising literature and coupons as described above.

FIG. 52 is a partial side cross-sectional view of lower flange portion 158 and opposite wall 156 of recloseable flange 60 sealed to a front web wall 3 of web

50. In this variant high flange portions 62, 63 are treated to be non-sealable. It is further appreciated that tape 150 and flange 60 can be constructed of materials that are about 3 mils in thickness or less. It is appreciated that the bi-laminate structure 72 allows for materials of decreased thickness to be used while still retaining the desired properties of bag 1. Web 50 is constructed of materials of standard thickness as used in the construction of disposable bags.

FIG. 55 is a side cross sectional view of the tape of FIG. 54 in an assembled bag 1. Phantom line 12 of FIG. 54 indicates the location of the cross sectional view of FIG. 55. Walls 3 and 4 are fusibly sealed one to another at fused seal 80 through apertures 70, 72 disposed near ends 74, 76. Fused seal 80 is juxtaposed around the periphery 72' of aperture 72.

Apparatus (not shown) is provided to make recloseable tape 150 or flange material 60 and wind tape 150 or flange 60 into rolls 245 (FIG. 56). The apparatus is located upstream of apparatus 28 and apparatus 200. Apparatus 200 unwinds a roll of tape 150 or flange 60, indexes as appropriate (advancing and indexing device 300), and optionally punches holes 70, 72 with hole punching device 160 near opposite ends 74, 76 of lip 6. Preferably holes 74, 76 are in the range of about 3/8 of an inch to about 1/2 of an inch in diameter (FIG. 54) and are equidistant from ends 74, 76 respectively. Holes 70, 72 are made of a desired size and geometric shape, e.g. circular, oval, square, rectangular, etc., depending upon the type of fusible seal 80 that is desired to be created (FIG. 55).

As illustrated in FIG. 56, apparatus 200 indexes again to a location centered above the backside of the intended front panel 3 of the basic web material 202 (cross web) and tape 150 or flange 60 is cut to a length that is less than the

width of front panel 3 of bag 1. Concurrent with the unwinding step described above, base web 202 is fed or indexed to a position that allows registration of zipper strip 18 (cross web) to just below the intended top of the finished bag 1 (advancing and indexing device 400). Lower flange area 158 and ends 74, 76 of lip 6, fold 154 and opposite wall 156 adjacent to the inside surface of front panel 3 are substantially sealed to the inside surface of front panel 3 (seal bars 220). As discussed above, the prepared web 50 is then fed to apparatus 28 as described above. Apparatus 28, in addition to making the normal cross sealing and cutting operations, utilizes sealing bars that are modified and of a size and shape to seal the opposite side of the loop or flange area.

While only a few, preferred embodiments of the invention have been described hereinabove, those of ordinary skill in the art will recognize that the embodiment may be modified and altered without departing from the central spirit and scope of the invention. Thus, the preferred embodiment described hereinabove is to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims, rather than by the foregoing description, and all changes which come within the meaning and range of equivalency of the claims are intended to be embraced herein.

What is Claimed:

1. An apparatus for dispensing, applying, and sealing individual sections of thermoplastic tape across a portion of a web of thermoplastic material, said apparatus comprising: means for dispensing said tape; a tape applicator apparatus; means for delivering tensioned tape from said tape dispensing
5 means to said tape applicator apparatus comprising a tape registration assembly for adjusting the position of said tape and a tape drive assembly for advancing said tape; a tape cutter assembly for cutting said tape into individual sections of a preselected length; vacuum belt means for advancing said section of tape into a desired position across said web of thermoplastic material; a tape sealing
10 mechanism for applying pressure and heat to said tape section on said web for a specified dwell time; and means for sequentially advancing said web.
2. The apparatus of Claim 1 wherein said means for dispensing said tape comprises: a roll of said tape pivotally mounted on a powered unwind seal; a tension arm having said tape round thereon, said tension arm being slidable mounted so as to rise or discard in response to tension on said tape; and means for
5 controlling rotation speed and tension of said unwind reel in response to said rising or descent of said tension arm.
3. The apparatus of said Claim 1 wherein said means for delivering tensional tape comprises: a plurality of dancer rollers thereon, the position of said tensioned dancer rollers indicating tension on said tape; film synchronizes means for synchronizing said tape with said tape application, said film synchronizer
5 means having one or more vertically adjustable rollers therein, said rollers being vertically adjustable in response to tension on said tape disposed through said

rollers; and a tape registration assembly for adjusting the registration of said tape, and a nip drive assembly for feeding said tape in response to the position of said rollers in said film synchronizer means and the position of said dancer rollers.

4. An apparatus for dispensing, applying and sealing individual sections of thermoplastic tape across a portion of a web of thermoplastic material, said apparatus comprising: means for advancing said web of thermoplastic material, said means including a motorized drive roll for dispensing said web; one
5 or more dancer rollers having said web threaded therethrough, a dancer arm supporting at least one of said dancer rollers; a pair of motorized nip rollers for advancing said web through said apparatus; means for detecting the position of said dancer arm and actuating said motorized drive roll and said motorized nip rolls at the speed required to maintain a selected tension on said web; means for
10 detecting the position of said tape and for signaling said web drive roll and said nip rollers to speed up or slow down in response thereto; and control means for coordinating the signals from said means for detecting the position of said tension arm and said means for detecting the position of said tape and for controlling the speed of said web and said tape.

5. The apparatus of Claim 4 and further comprising: a form fill seal machine having a set of dancer rollers on the front portion thereof for carrying said web having said sections of tape thereon; a sensor for determining the position of at least one of said dancer rollers so as to determine the tension on said
5 web; and means for signaling said control means for controlling the speed of said web and said tape.

6. The apparatus of Claim 4 wherein said control means comprises: a

computer electronically connected to said tension arm, said motorized drive roll, said means for detecting the position of said dancer arm, said motorized nip rollers, said means for detecting the position of said tape, said tape drive roll, and said tape nip rollers.

7. The apparatus of Claim 4 wherein said control means comprises fluid logic controls to said tension arm, said motorized drive roll, said means for detecting the position of said dancer arm, said motorized nip rolls, said means for detecting the position of said tape, said tape drive roll and said tape nip rollers.

8. The apparatus of Claim 1 and further comprising: means for ultrasonic sealing the ends of said sections of said tape prior to cutting of said tape, positioned between said means for dispensing said tape and said tape applicator.

9. The apparatus of Claim 1 wherein said vacuum belt means, said tape registration assembly and said tape cutter assembly are interconnected by a belt drive constructed and arranged for maintaining the relative speed of operation of said vacuum belt means, said tape cutter assembly and said nip rollers, and for
5 retaining the relative position of said tape and said tape segments driving operation of said apparatus.

10. The apparatus of Claim 9 wherein said belt drive is powered by a single motor so as to provide constant speed and tension.

11. The apparatus of Claim 9 wherein said tape drive assembly comprises: a double hub, having a first hub and a second hub, said first hub being connected by a toothed belt to a third hub on said drive motor, said third hub being mounted on a first shaft powered by said drive motor so as to rotate said

third hub thereby causing said double hub to rotate; said double hub being mounted on an end of one of said nip rollers so as to cause rotation of said nip roller when said double hub is rotated; said vacuum belt having a drive shaft extending through one end thereof and a fourth hub extending from said drive shaft, said fourth hub having a toothed drive belt disposed thereon; said toothed drive belt being connected to first said hub so as to cause said fourth hub and said drive shaft to rotate when said first hub rotates, thereby driving said vacuum belt in synchronization with said cutter assembly and said nip rollers.

12. The apparatus of Claim 1, wherein said tape cutter assembly comprises: an air piston mechanism having a shaft extending downwardly therefrom, said air piston being constructed and arranged to selectively raise and lower said shaft; a cutter blade and clamp affixed to the distal end of said shaft for clamping and cutting of said tape; a slidable die plate for selectively being positioned under said tape, said die plate having a slot extending therethrough and a spring loaded stripper block proximate said slot; said clamp being constructed and arranged for pushing down said stripper block when said shaft is extended so as to facilitate cutting of said tape; said stripper block being constructed and arranged to press upwardly when said clamp is pulled upwardly by said shaft, said stripper block being constructed and arranged to push the distal end of said tape towards said vacuum belt.

13. The apparatus of Claim 1 wherein said vacuum belt means comprises: a vacuum belt having a plurality of holes extending therethrough; said vacuum belt being rotatably mounted on a pair of rollers; at least one of said rollers being powered so as to selectively cause rotation of said belt, and

incremental advancement of said belt a desired distance; a ledge extending below said belt constructed of a slick thermoplastic elastomer and sized and positioned so as to serve as a barrier to air from said web moving thereunder, and as an eliminator of plastic electricity.

14. The apparatus of Claim 13 wherein said vacuum belt is approximately one inch wide and said holes are centered 5/8" from the edge of said belt.

15. The apparatus of Claim 1 wherein said tape comprises a folded loop having a pair of interlocked fastener profilers attached thereto on the inside surface thereof, said interlocked fastener profilers being constructed and arranged for selectively opening and resealing, whereby when said tape is positioned and sealed on said web, said web is suitable for conversion into a plurality of resealable bags.

16. A method of sealing individual sections of thermoplastic tape across a portion of a web of thermoplastic material: dispensing said tape a desired distance; cutting said tape to a desired length of the individual sections of said tape; grasping the end of said individual section through the use of a vacuum; sequentially applying vacuum to the length of said individual section of tape and simultaneously advancing said individual section of tape over said web; pressing said individual section of tape to said web; and heat sealing said individual section of tape to said web.

17. The method of Claim 16 and further comprising the step of coordinating the advancement of said web with the advancement of said tape and said section of tape.

18. The method of Claim 17 and further comprising the steps of:
running said web from an unwind roll through a series of dancer rollers; reading
the portion of said dancer rollers; signaling a drive motor to advance or retard said
web based on the position of said dancer rollers; signaling a tape drive the position
5 of said dancer roller; running said tape through a series of tape dancer rollers;
signalling said tape drive the position of said tape dancer rollers. thereby causing
said tape drive to advance or retard said tape; signalling said drive motor to
advance or retard said web.

19. The method of Claim 18 and further comprising: feeding said web
with sections of tape sealed thereon into a form fill seal machine and through a set
of form fill seal dancer rollers at the back thereof; signalling the position of said
form fill seal dancer rollers to said tape drive and said web drive motor so as to
5 control movement of said tape and said web.

20. An apparatus for the coordination of web and tape in a multi dancer
roller machine comprising: a sensor for detecting the position of said tape on tape
dancer rollers; a sensor for detecting the position of said web on said web dancer
rollers; means for coordinating sequential advancement of said tape, said web and
5 the cutting of said tape.

21. The apparatus of Claim 1 and further comprising: computer means
for coordinating said means for dispensing said tape, said tape applicator, said tape
cutter, said tape drive, said vacuum belt and said means for sequentially advancing
said web.

22. The apparatus of Claim 21 and further comprising: keyboard means
for adjusting the length of said tape sections. the space between said tape sections

sealed on said web, and the speed of operation of said apparatus for dispensing, applying and sealing said individual sections of tape to said web.

23. A vacuum belt slit for tape having fastener profilers thereon; said vacuum belt comprising: a vacuum belt having a plurality of holes extending therethrough; said vacuum belt being rotatably mounted on a pair of rollers; at least one of said rollers being powered so as to selectively cause rotation of said belt, and incremental advancement of said belt a desired distance; a vacuum source
5 for said vacuum belt; and said vacuum belt being aligned with a flange of said tape so that said fastener profilers run parallel to but not under said vacuum belt whereby said tape segments may be firmly drawn and held to said belt by said vacuum source, and advanced to a desired position over said web.

24. The apparatus of Claim 23 and further comprising: vertically movable sealing bar means for sealing said tape segment to said web, said sealing bar means being positioned so as to seal a portion of said tape running parallel to and extending laterally from under said vacuum belt to said web.

25. A method of manufacturing a reclosable bag having top and bottom ends and opposing front and rear walls comprising the steps of: forming said walls from web material having thereon a flexible interlocking fastener lip permanently connected to a fastener assembly, said fastener assembly comprising an engaging
5 portion releasably connected to a complimentary engaging portion, said complimentary engaging portion sealed to said front wall; and, simultaneously sealing an end of said front wall to said flexible interlocking fastener lip, and sealing said flexible interlocking fastener lip to said back wall, whereby a fail-safe reclosable bag barrier is formed reducing the risk of contamination or release of

contents within or from an interior storage volume of said bag by inadvertent separation of one portion of said front wall from another portion of said wall.

26. The method of Claim 25 further comprising the steps of securing said complimentary engaging portion to a front wall portion of said web material; and, releasably interconnecting said complementary engaging portion to said engaging portion upstream from a forming and filling nozzle cylinder of a form,
5 fill and seal machine.

27. The method of Claim 25 further comprising the step of securing predetermined sections of said fastener assembly having said flexible interlocking fastener lip to a continuous elongate sheet of said web material at bag length intervals along said continuous elongate sheet.

28. The method of Claim 25 in which said step of sealing includes heat sealing.

29. The method of Claim 25 further comprising the step of inserting products into said reclosable bag.

30. A reclosable bag having front and back walls and a first end and a second end comprising : an interlocking fastener lip having an engaging member thereon, said interlocking fastener lip disposed between said walls and sealed to said walls at said first end of said bag; a complimentary engaging member aligned
5 with respect to said engaging member and connected to said front wall, said engaging member being releasably connected to said complimentary engaging member, in which contamination or release of the contents of said reclosable bag is prevented upon inadvertent separation of one portion of said wall having said complimentary engaging member from another portion of said wall.

31. The reclosable bag of Claim 30 further comprising products.

32. The reclosable bag of Claim 30 further comprising a rupture line disposed on said front wall between said first end and said complementary engaging member.

33. The reclosable bag of Claim 32 further comprising promotional material or coupons disposed in a pouched formed from said lip and said front wall, said promotional material or coupons being accessible by rupture of said rupture line.

34. An apparatus for manufacturing reclosable bags having top and bottom ends and opposing front and rear walls comprising, in combination, web material having thereon a flexible interlocking fastener lip permanently connected to a fastener assembly, said fastener assembly comprising an engaging portion
5 releasably connected to a complimentary engaging portion, said complimentary engaging portion connected to said front wall; means for simultaneously sealing an end of said front wall to said flexible interlocking fastener lip, and said flexible interlocking fastener lip to said back wall; and, means for forming and sealing said bags from said web material.

35. The apparatus of Claim 34 further comprising means for filling said recloseable plastic bags with products.

36. A web comprising a multiplicity of flexible interlocking fastener lips free of connection to said web, each said lips permanently connected to a fastener assembly, each said fastener assembly comprising an engaging member interlocked and releasably connected to a complimentary engaging member, said
5 complimentary engaging member connected to a front wall portion of said web.

37. The web of Claim 36 in which said web is provided on a roll.

38. The web of Claim 37 in which several of said rolls are packaged together.

39. A tape for a web, said tape comprising a lip, a fold connected to said lip, an opposite wall connected to said fold, and flange connected to said opposite wall, said lip, fold, opposite wall and flange having an outer surface thereof capable of being sealed to said web, said lip having a recloseable fastener
5 portion connected thereto at an end thereof matable to a mating fastener connected to said opposite wall, said mating fastener having said flange juxtaposed thereto and being substantially parallel to an end of said flange, and said lip, fold, and opposite wall having an inside surface thereof treated so as to be non-sealable.

40. The tape of Claim 39 free of said fold.

41. The tape of Claim 39 in which said lip, fold, opposite wall and flange comprise a continuous piece of plastic material.

42. A bag having a front and back wall, said bag comprising the tape of Claim 39 in which said outer surface of said opposite wall and said flange is sealed to said front wall and said lip is sealed to said back wall, said bag having an upper severable portion and a temporary storage volume accessible by
5 severance of said upper severable portion, in which severance of said upper several portion provides access to said reclosable fastener portion and said mating fastener.

43. The bag of Claim 42 in which said outer surface of said opposite wall and said flange is substantially sealed to said front wall and said lip is substantially sealed to said back wall.

44. The bag of Claim 42 in which said there are two apertures on said

tape and in which multiple fusible seals are disposed at opposite ends of said bag sealing said front wall to said back wall.

45. A simplified method of manufacturing a reclosable bag having top and bottom ends, opposing front and rear walls and a top seal, comprising the steps of: securing a fastener assembly having a fastener element and a mating fastener element to a front wall portion of a web material at said fastener element
5 and releasably interconnecting said fastener element to said fastener mating element upstream from a forming and filling nozzle cylinder of a form, fill and seal machine, said fastener mating element having thereon a flexible interlocking fastener lip permanently connected to said mating fastener element; forming said walls from said web material; sealing an end portion of said front wall to an end,
10 portion of said flexible interlocking fastener lip; and, sealing said end portion of said flexible interlocking fastener lip to an end portion of said back wall to form said top seal of said reclosable bag, in which said sealing steps occur, simultaneously.

46. The method of Claim 45 in which said sealing step occurs after said forming step.

47. A method of making a reclosable bag having top and bottom seals and opposing front and rear walls, said reclosable bag made from web material having a length and a width, comprising the steps of: connecting a predetermined length of fastener tape or flange substantially perpendicular to said length of said
5 web material and on said front wall at a lip of said fastener tape or flange, said fastener tape or flange having an interlocked fastener connected thereto, forming said opposing front and rear walls, and said top and bottom seals, and, connecting

said fastener tape or flange to said front and rear walls at a location other than said interlocked fastener or said lip.

48. The method of Claim 47 in which said fastener flange is substantially h-shaped, said h-shaped fastener flange having a first and second leg, and further comprising the step of connecting said interlocked fastener to each of said legs.

49. The method of Claim 48 further comprising the step of connecting barrier tape to an inside wall of each of said legs.

50. The method of Claim 48 further comprising the step of coating an inside wall of each of said legs to make each said inside wall non-sealing.

51. The method of Claim 48 further comprising the steps of providing said fastener tape or flange from a roll, cutting said fastener tape or flange to obtain said predetermined length of fastener tape or flange, said predetermined length of fastener tape or flange having two opposing ends, and sealing said
5 opposing ends.

52. A fastener flange, said fastener flange being substantially h-shaped, said substantially h-shaped fastener flange having a first leg and a second leg, said first leg being connected to said second leg by an interlocked fastener, and a mounting lip connected to said second leg.

53. The fastener flange of Claim 52, in which said first leg and said second leg comprise a closed loop.

54. The fastener flange of Claim 52 in which said fastener flange is formed from thermoplastic material in the range of up to 4 mil in thickness.

55. The fastener flange of Claim 52 in which the interlocked fastener

and said fastener flange are non-homogeneous.

56. A method of manufacturing fastener tape, comprising the steps of: connecting a fastener of an interlocked fastener assembly to a base tape material, said interlocked fastener assembly having said fastener and a fastener complementary to said fastener, folding said base tape material over said
5 complementary fastener to form a fold, and, connecting said complementary fastener to said base tape material.

57. The method of Claim 56 further comprising the step of slitting said fold to form a fastener flange.

58. The method of Claim 56 further comprising the step of coating an interior surface of said base tape material to make it non-sealing.

59. The method of Claim 56 further comprising the step applying barrier tape on the inside surface of said fold.

60. The method of Claim 59 further comprising the step of slitting said barrier tape and said fold to form a fastener flange.

61. A method of sealing fastener tape or flange to a web in a form, fill, seal machine, said fastener tape or flange having an interlocked fastener connected thereto, and said web having a length and a width comprising the step of connecting a predetermined length of said fastener tape or flange substantially
5 perpendicular to said length of said web at a location other than at said interlocked fastener.

62. The method of Claim 61 further comprising the step of connecting said predetermined length of said fastener tape or flange to a front wall of a bag formed in said machine, at a substantially flat lip of said fastener tape or flange.

63. The method of Claim 61 further comprising sealing said predetermined length of said fastener tape or flange to said web at least two locations other than at said interlocked fastener.

64. The method of Claim 63 in which said two additional locations comprise a front wall and a back wall of a bag formed in said form, fill, seal machine.

65. The method of Claim 63 further comprising the step of pinning or optionally staking said fastener tape or flange to said web prior to said connecting step.

66. The method of Claim 63 further comprising the steps of pinning or optionally staking one end of said fastener tape or flange prior to cutting a second end of said fastener tape or flange.

67. The method of Claim 66 further comprising the step of simultaneously pinning a second end of said fastener tape or flange during said cutting step.

68. The method of Claim 62 in which said connecting step further comprises the step of sealing said lip to said web to form a seal while said fastener tape or flange is pinned to said web.

69. The method of Claim 68 in which said seal is substantially parallel to said interlocked fastener.

70. The method of Claim 68 in which a seal bar performs said step of sealing, and further comprising the steps of pinning said fastener tape or flange to said web while said seal bar moves away from a sealing position.

71. The method of Claim 61 further comprising the step of connecting

ends of said predetermined length of said fastener tape or flange to keep said interlocked profile in alignment.

72. A reclosable tape comprising, a reclosable interlocked fastener connected to a tape, said tape having a loop having a fold, said recloseable interlocked fastener connected to said loop, said loop having an inside loop surface, and said inside loop surface being non-sealable.

73. The reclosable tape of Claim 72 in which said inside loop surface is selected from the group consisting of an electronic corona style treated surface, a non-sealable lacquer treated surface, and a surface having a non-sealable barrier strip applied thereto.

74. The reclosable tape of Claim 72, in which said tape further comprises a web material compatible outside surface, and in which at least a portion of said inside loop surface is fastener compatible.

75. An apparatus for making recloseable tape or flange, comprising: connecting means for connecting a first fastener of an interlocked fastener to a base tape or flange material, folding means for folding said base tape or flange material over a second fastener of said interlocked fastener and for forming a fold,
5 connecting means for connecting a second fastener of said interlocked fastener to said base or flange material, treating means for making at least one inside wall of said recloseable tape or flange non-sealable, and, optional cutting means for cutting said fold.

76. The apparatus of Claim 75 further comprising rolling means for rolling said recloseable tape or flange onto a spool.

77. A snack bag comprising the recloseable tape of Claim 79.

78. The snack bag of Claim 77 further comprising having a thin sealant layer disposed above said recloseable tape to provide for ease of opening of said snack bag.


79. A tape or flange fastener comprising a lip, an interconnected fastener connected to said lip, and a loop connected to said interconnected fastener, said loop sized and dimensioned to provide sufficient stiffness to allow for the movement of said tape or flange fastener by a vacuum belt.

80. An elongate web having a length and a width comprising a multiplicity of segments of fastener tape or flange connected to said web substantially perpendicular to the length of said web, each said fastener tape or flange having a lip, said lip sealed to said web at predetermined intervals at a lip seal, each said lip having a flexible interlocked fastener thereon, each said interlocked fastener spaced apart from said lip seal and unconnected to said web at said interlocked fastener.


81. The method of Claim 23 and further comprising: continuously applying said vacuum to said vacuum belt whereby positioning of said individual section of tape on said vacuum belt is fixed; and moving said web with said individual section of tape affixed thereon without releasing said vacuum, said seal of said individual section of tape to said web being strong enough to overcome the pull of said vacuum during movement of said web.

82. The apparatus of Claim 16 wherein said vacuum source is continuously applied to said vacuum belt without cycling on and off, whereby precise positioning of said tape segment on said vacuum belt is maintained.

1 / 3 4

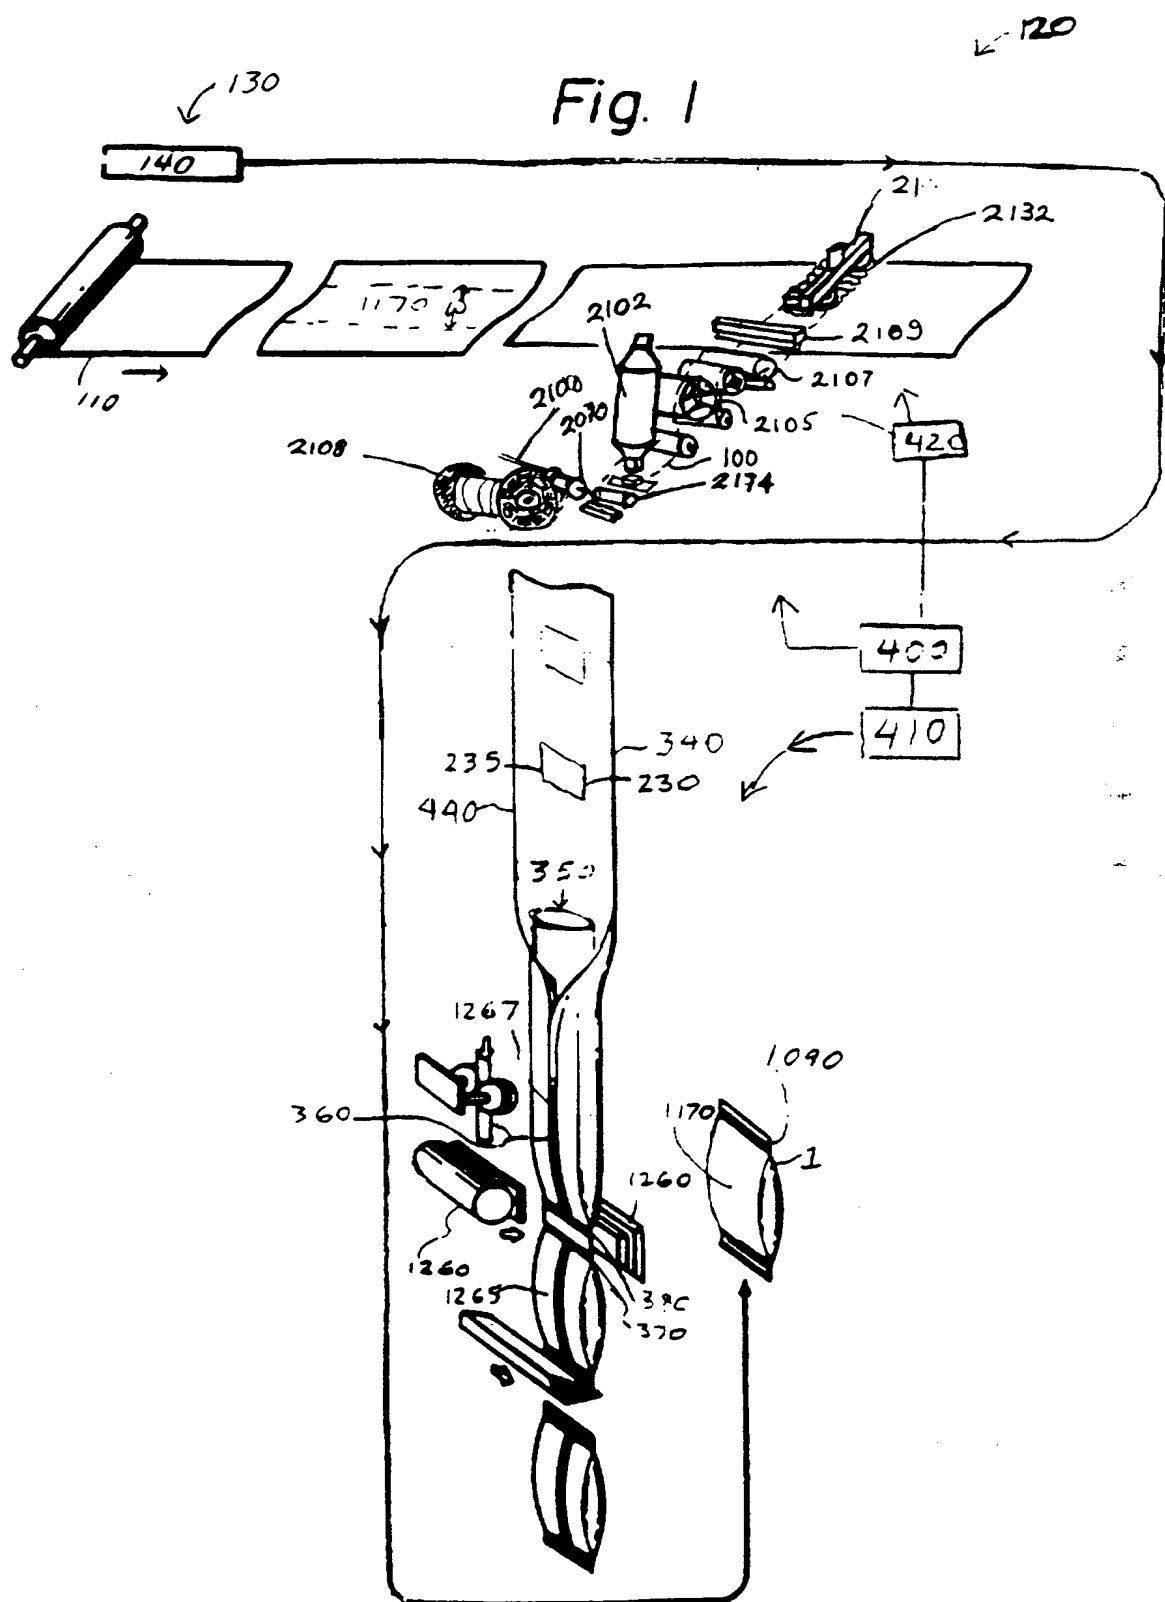


2 / 3 4

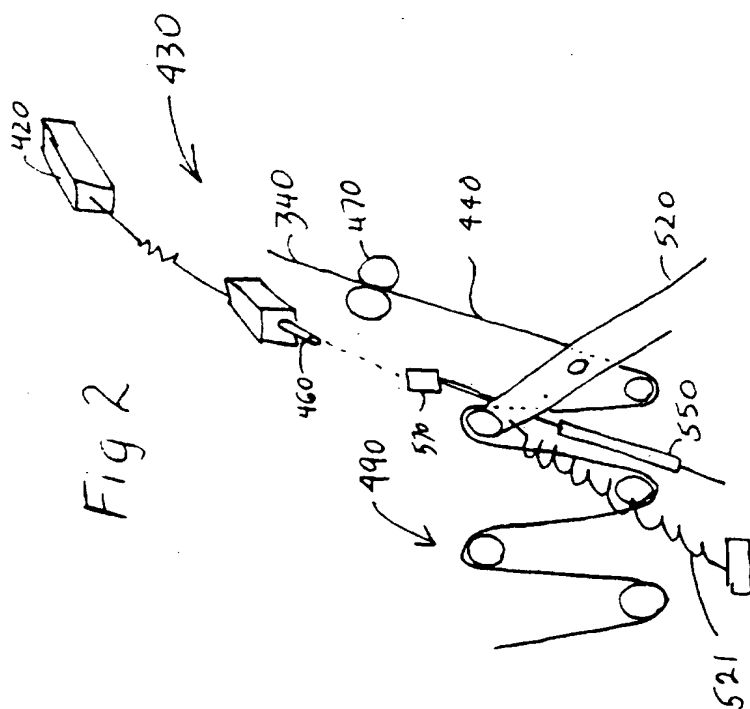


3 / 3 4

Fig. 3

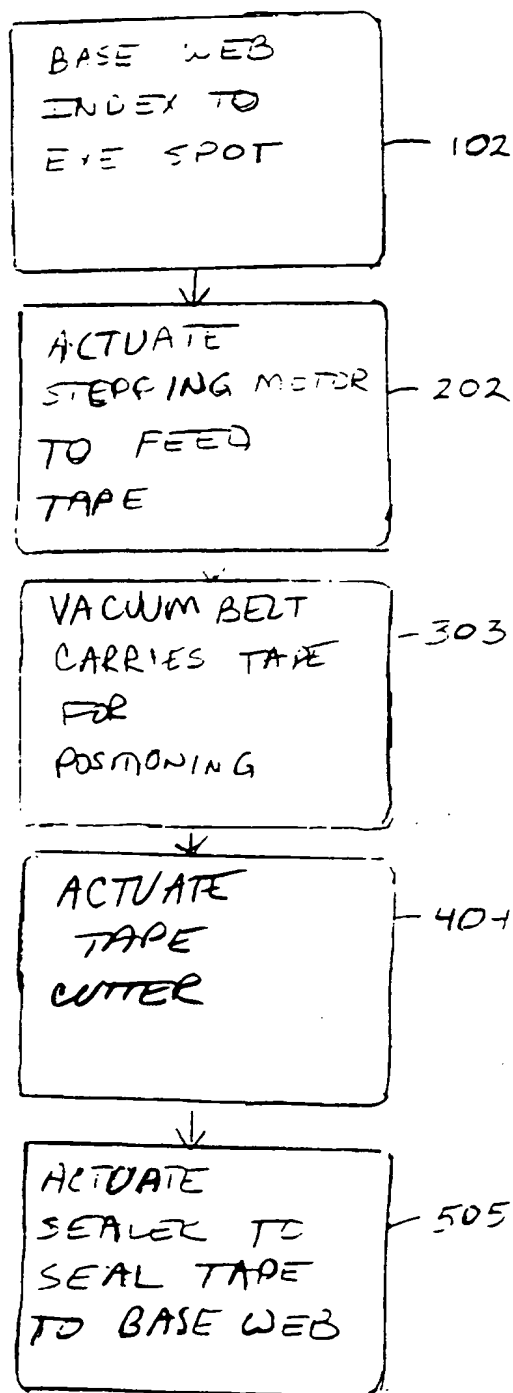

4 / 3 4

FIG. 4
190

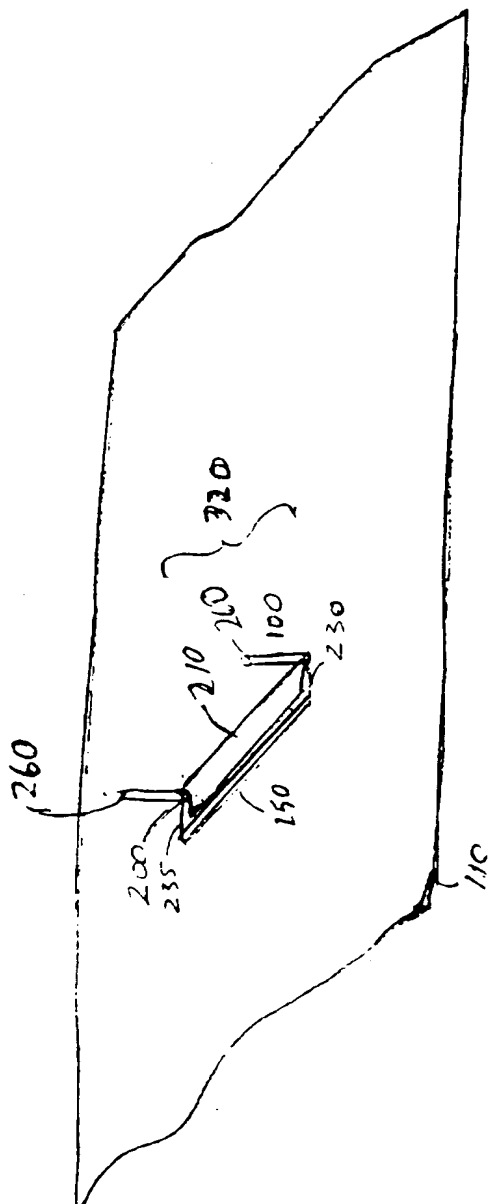

5 / 3 4

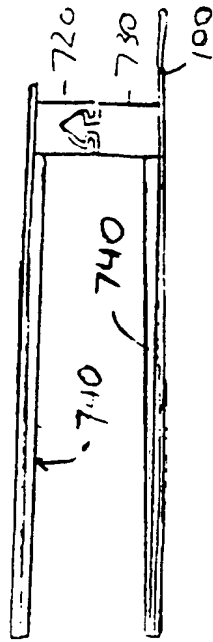


Fig. 8

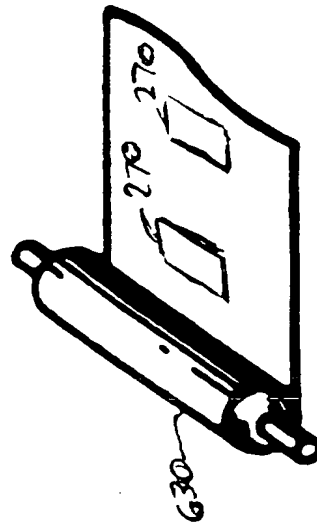


Fig. 5

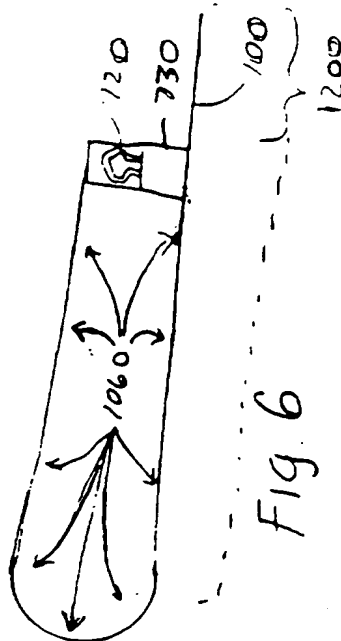


Fig. 6




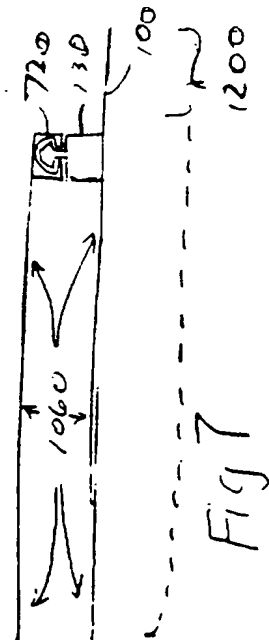


Fig. 7

6 / 3 4

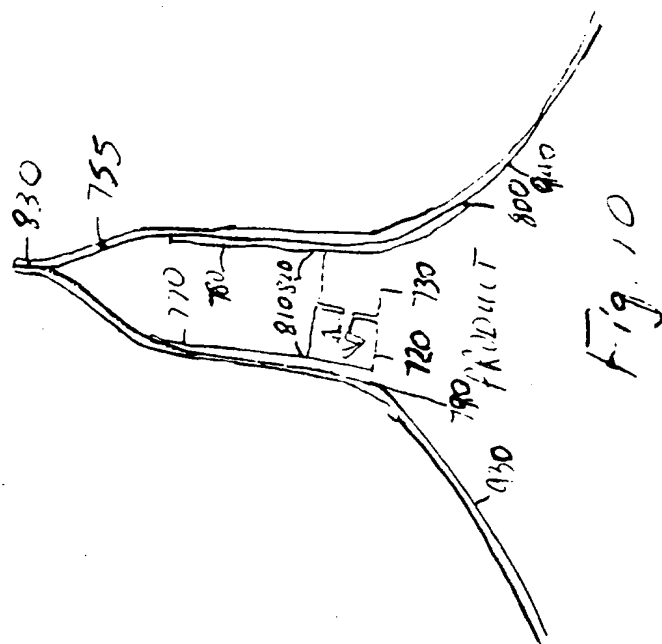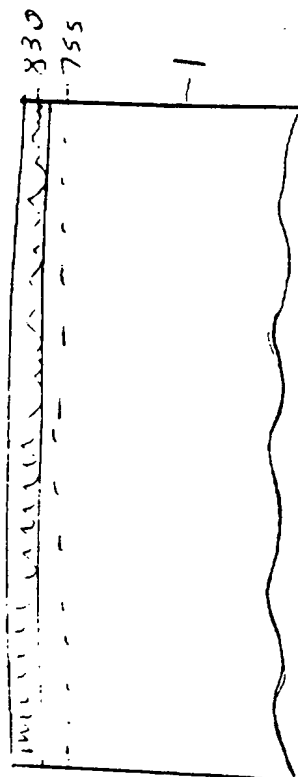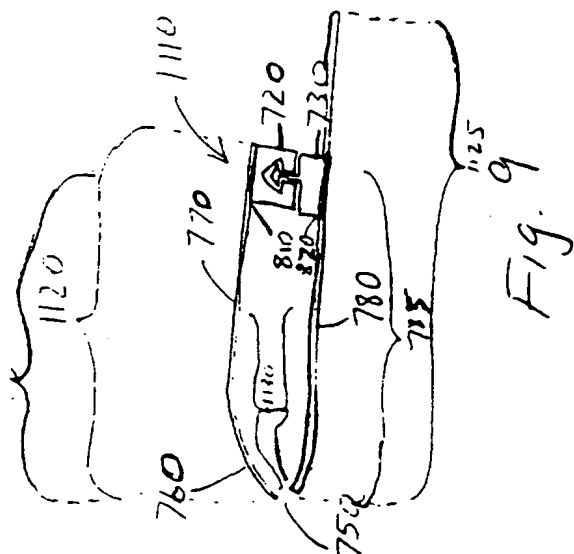

7 / 3 4

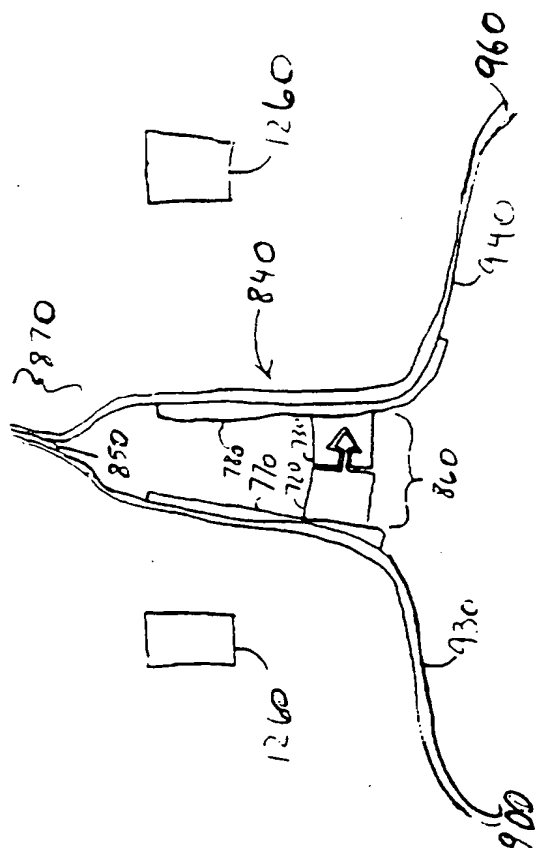


FIG. 12



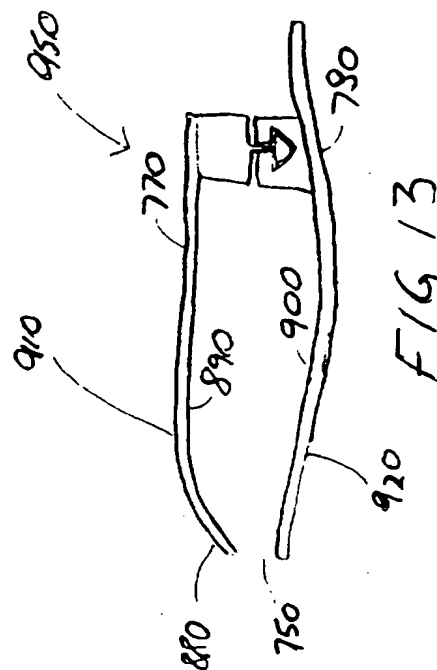


FIG. 13

8 / 3 4

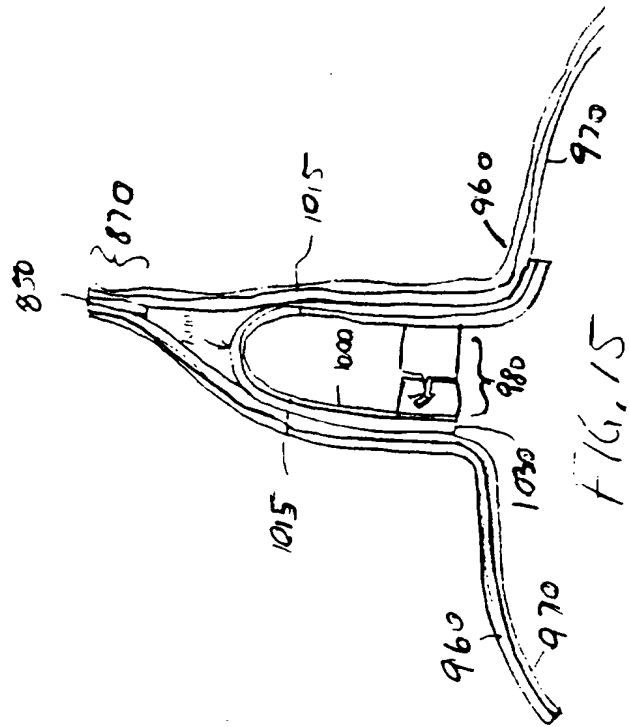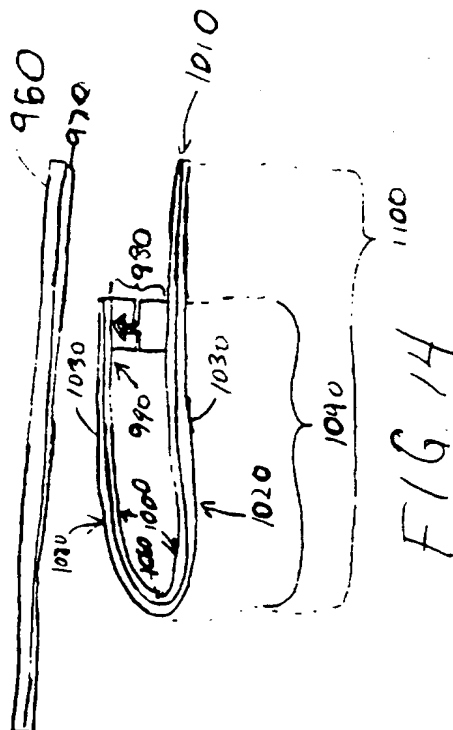

9 / 3 4

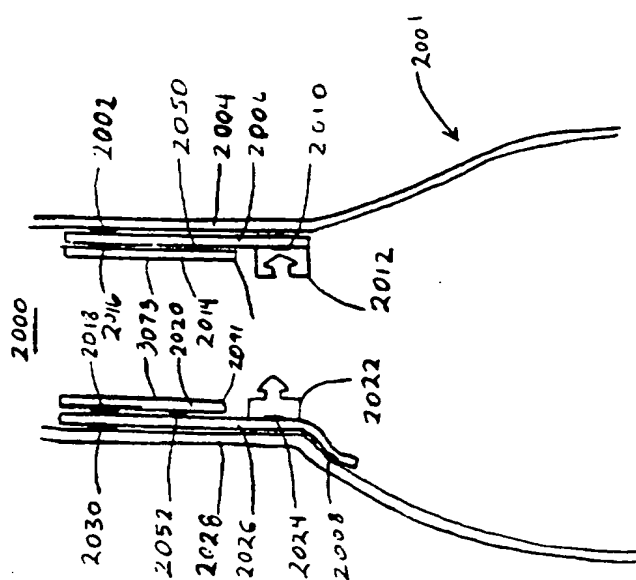


FIG. 16

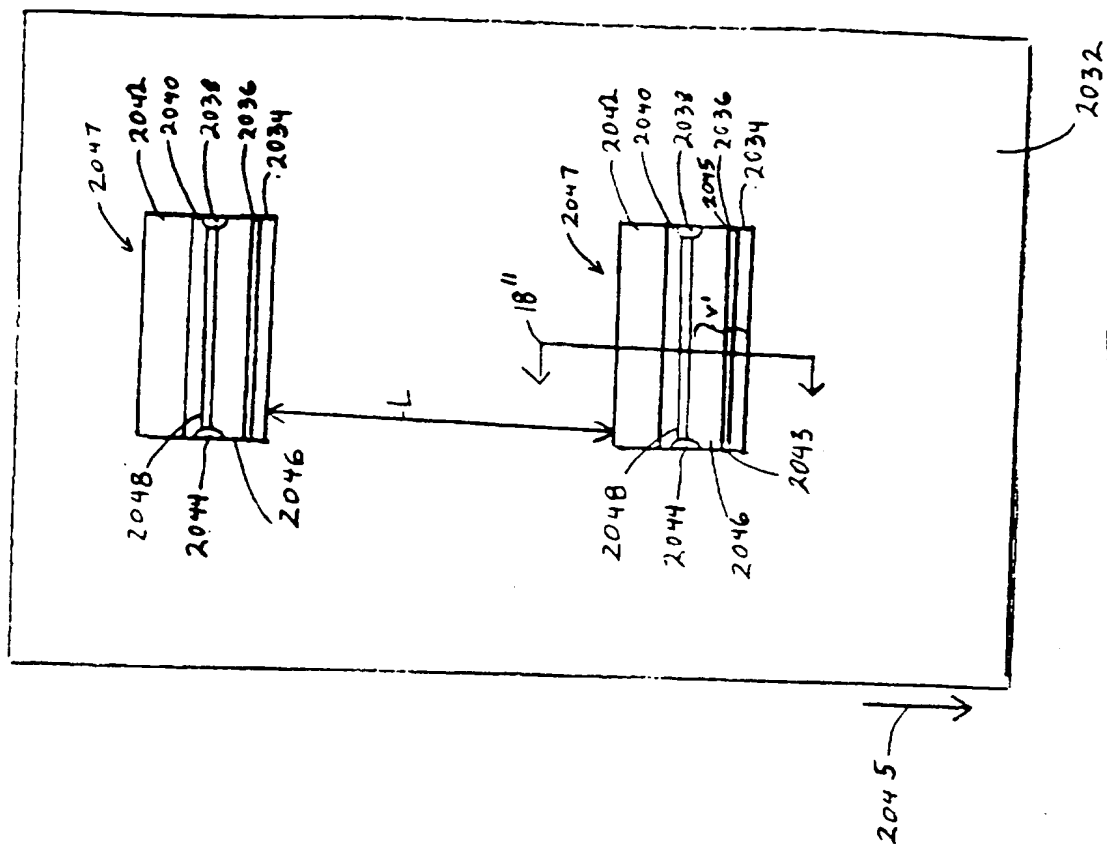


FIG. 17

10 / 3 4



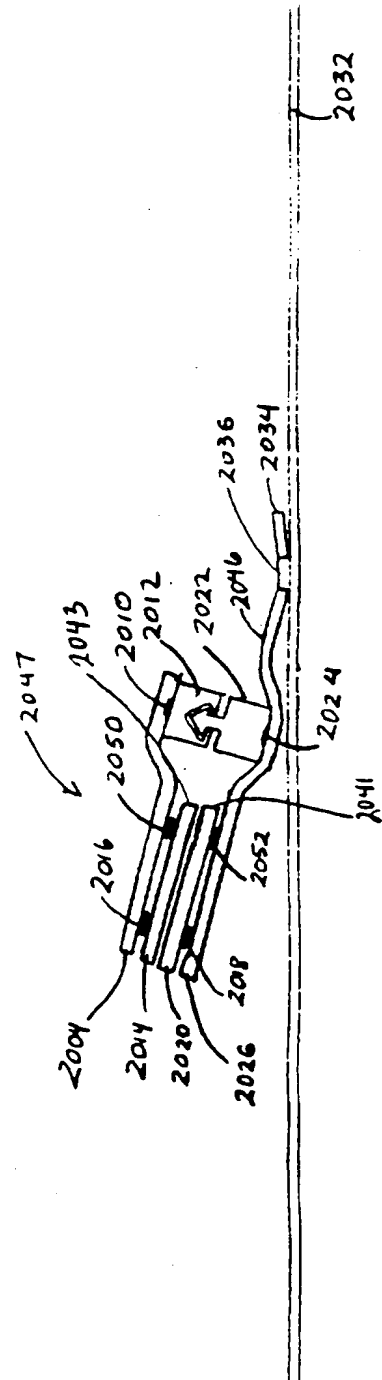


FIG 1B


11 / 3 4

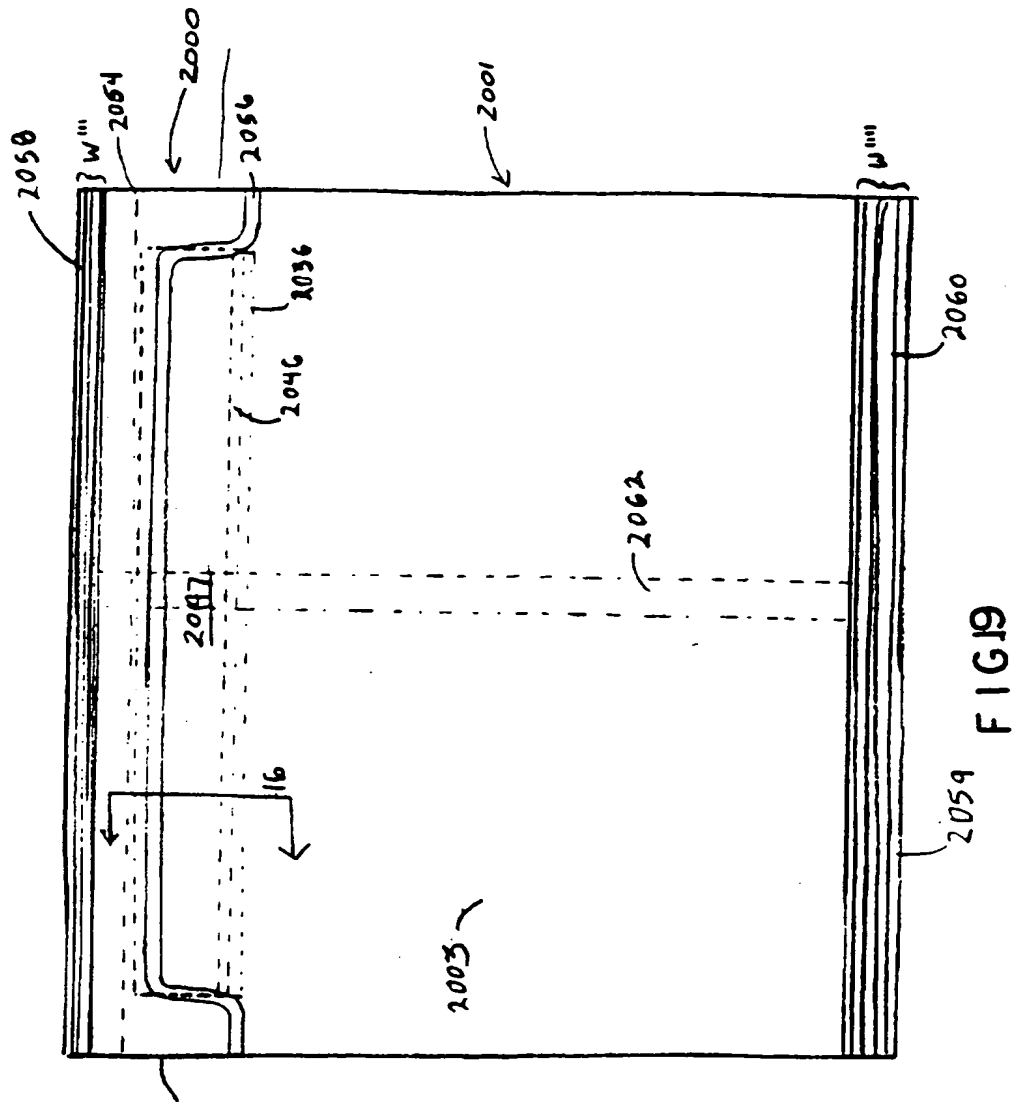

1 2 / 3 4

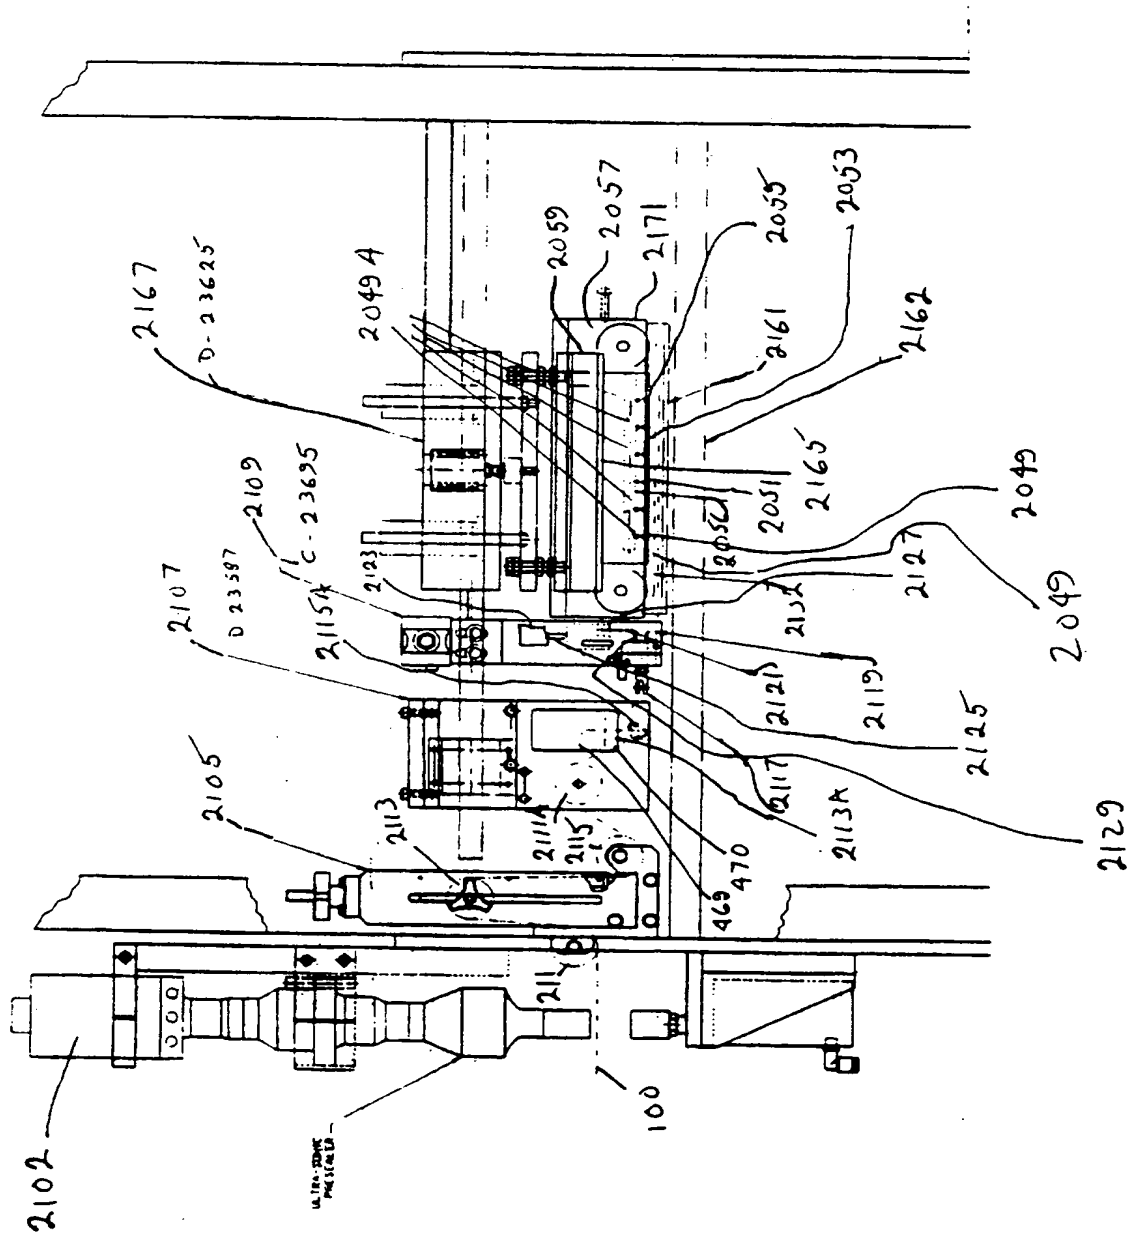

13 / 3 4

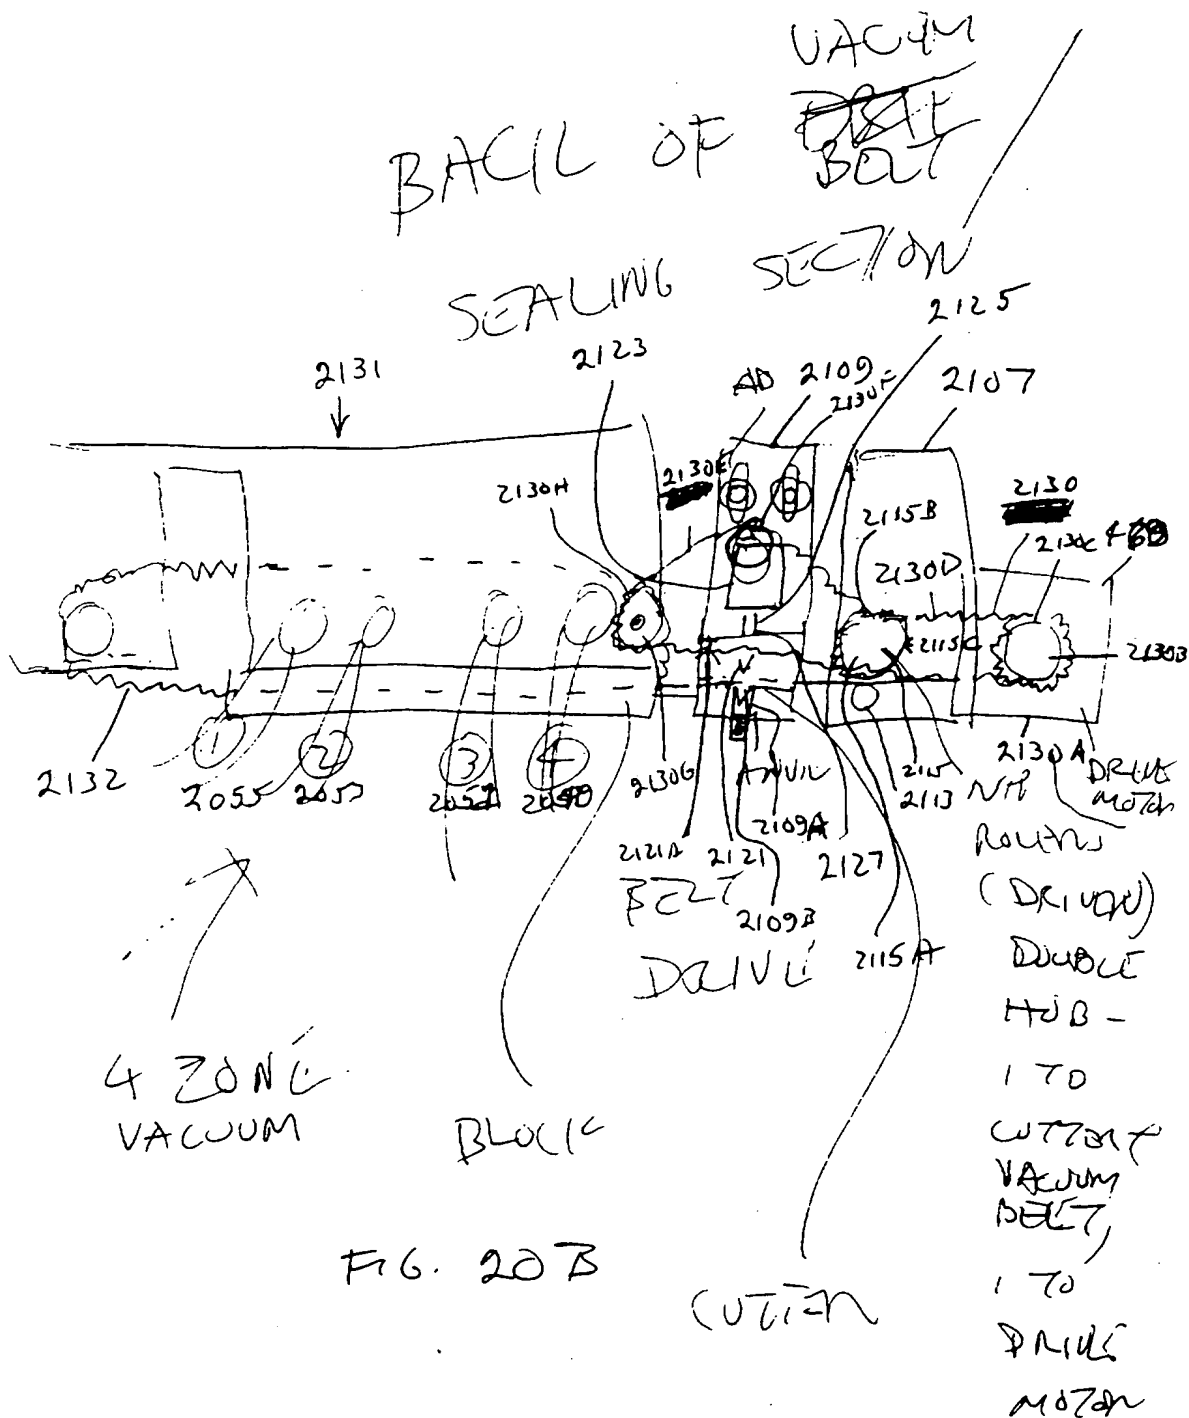

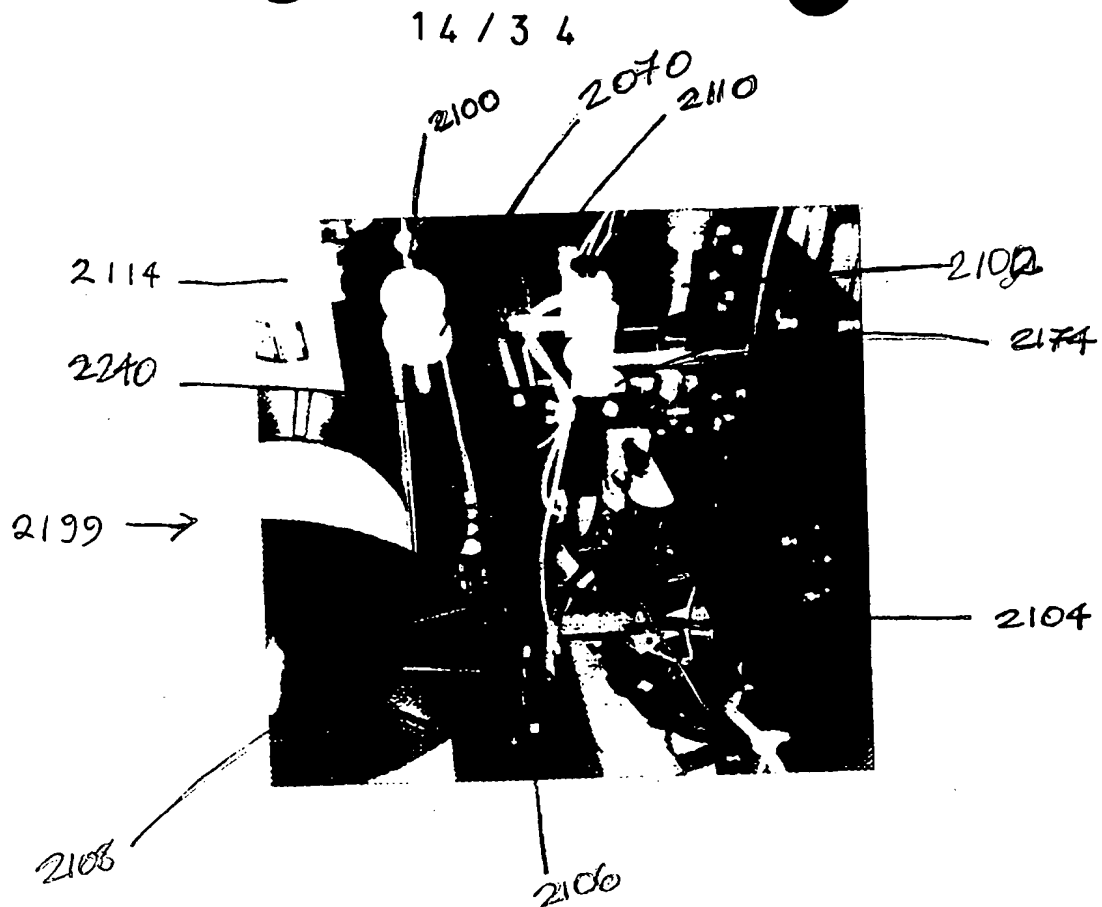


FIG. 20



FIG. 21

15 / 3 4

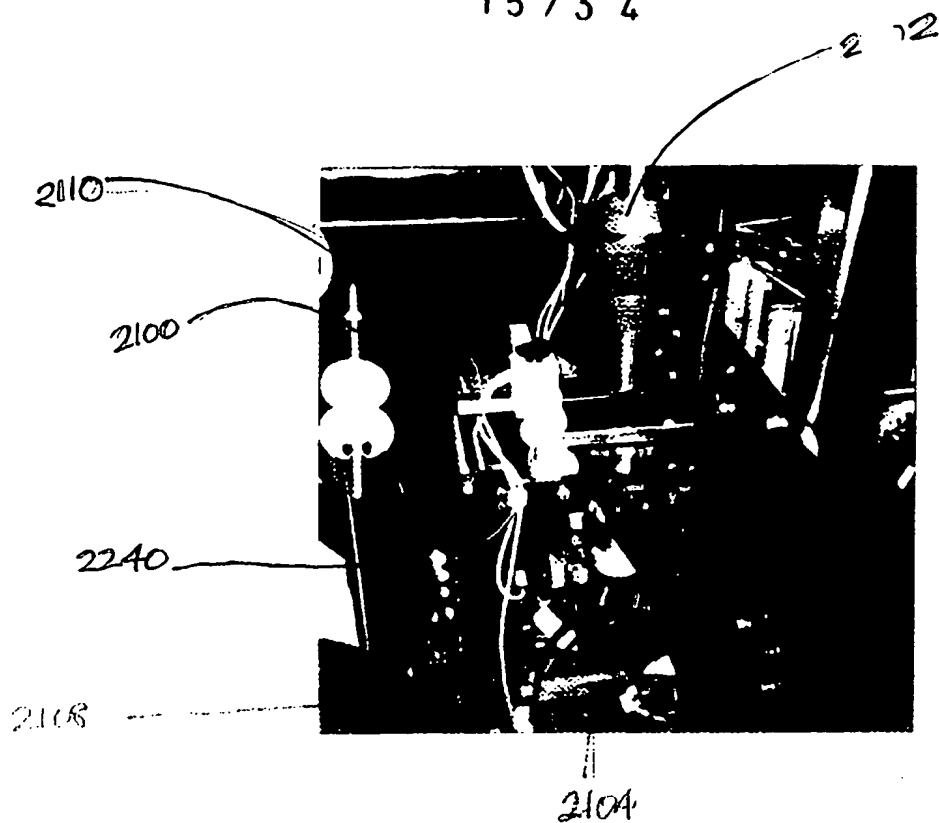


FIG. 22

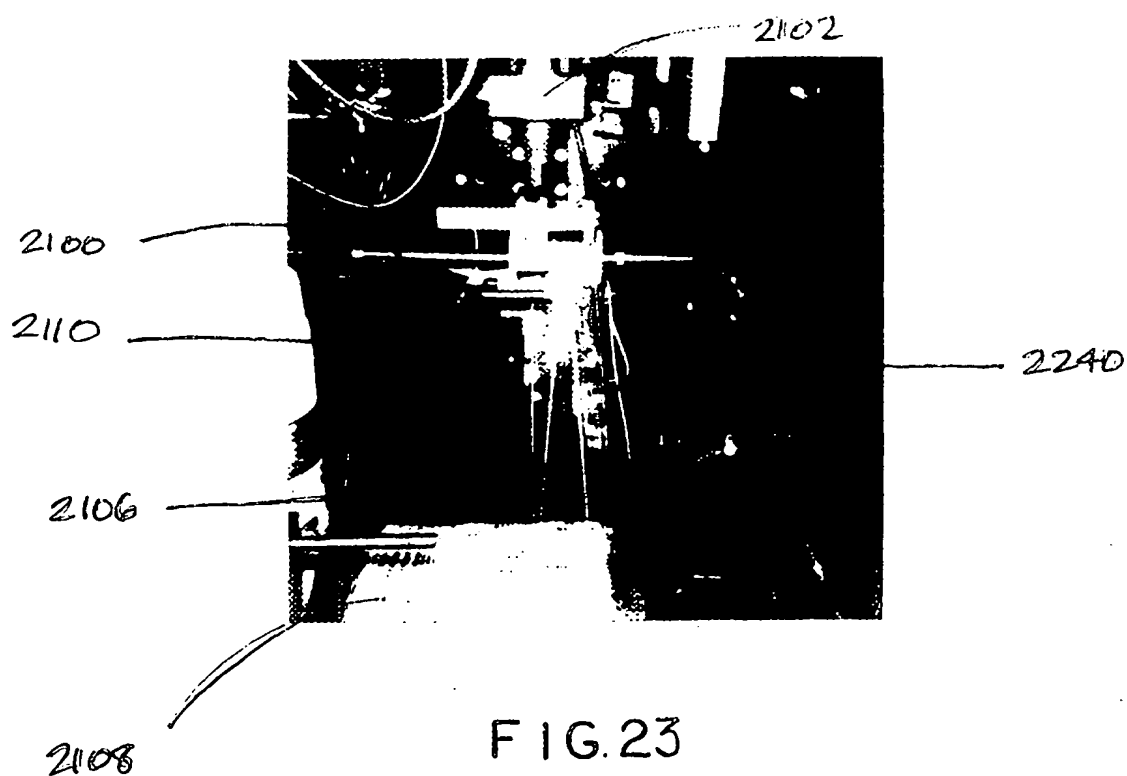


FIG. 23

16 / 3 4

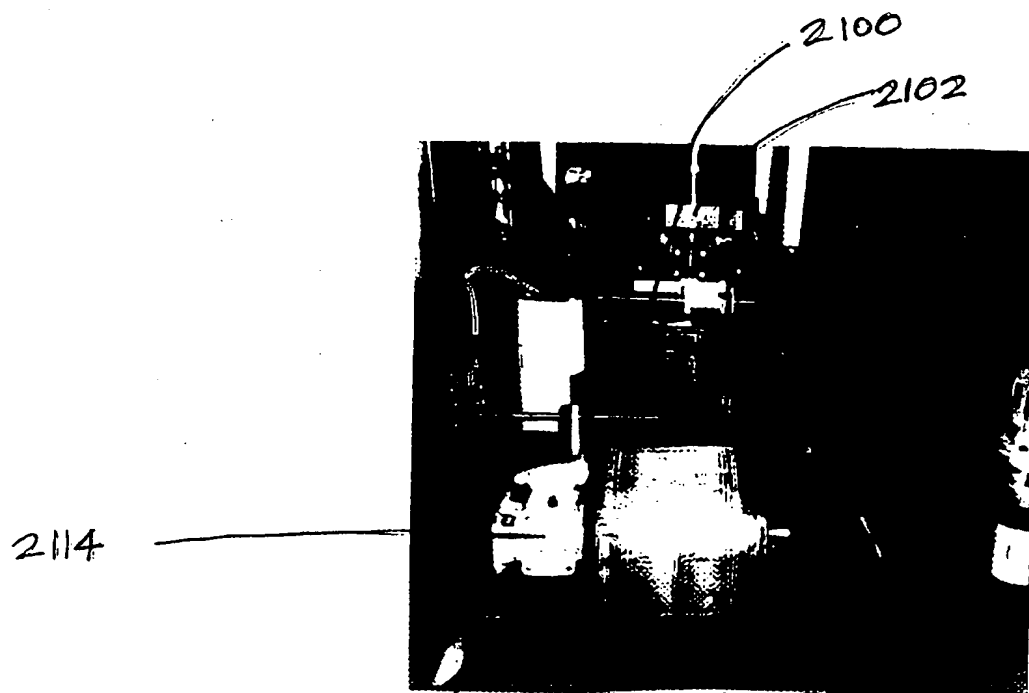


FIG. 24

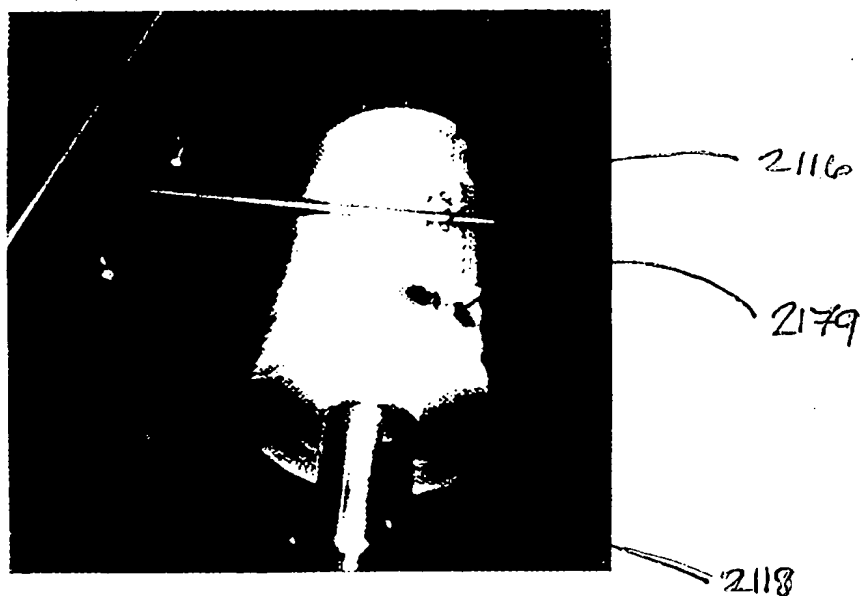


FIG. 25

17 / 3 4



FIG. 26



FIG. 27

18 / 3 4

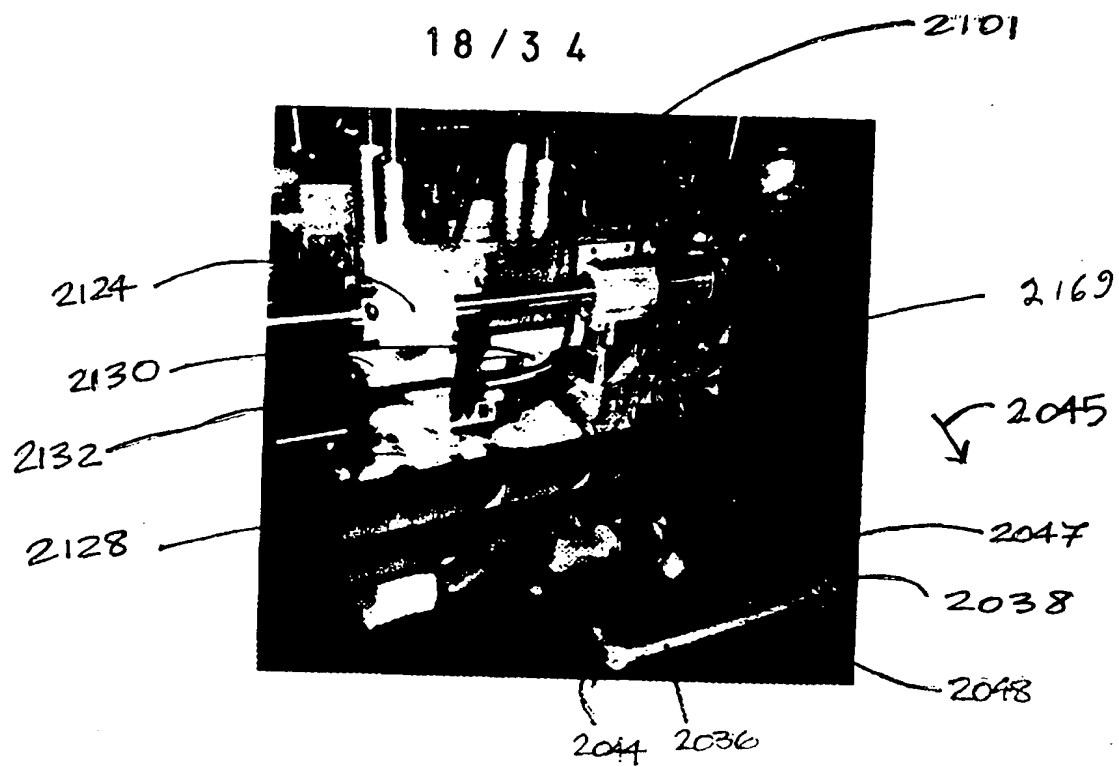


FIG. 28

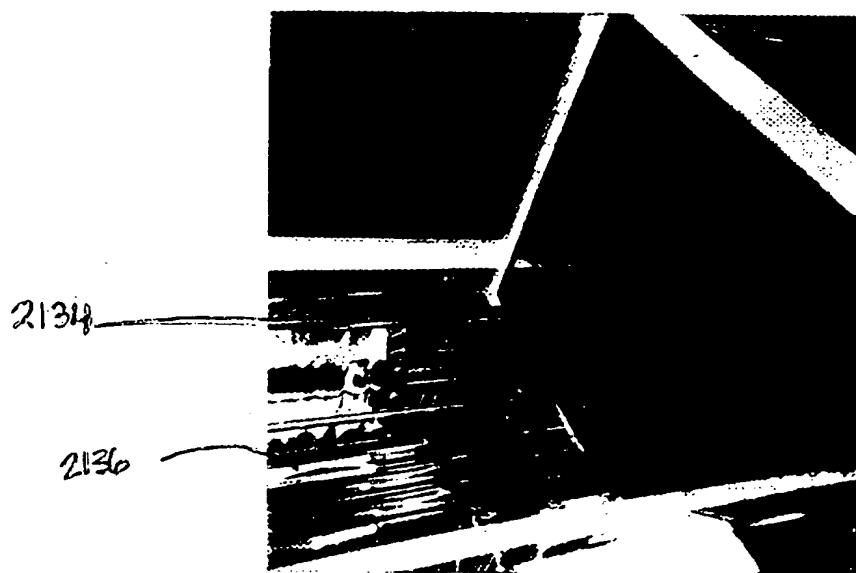


FIG. 29

19 / 3 4

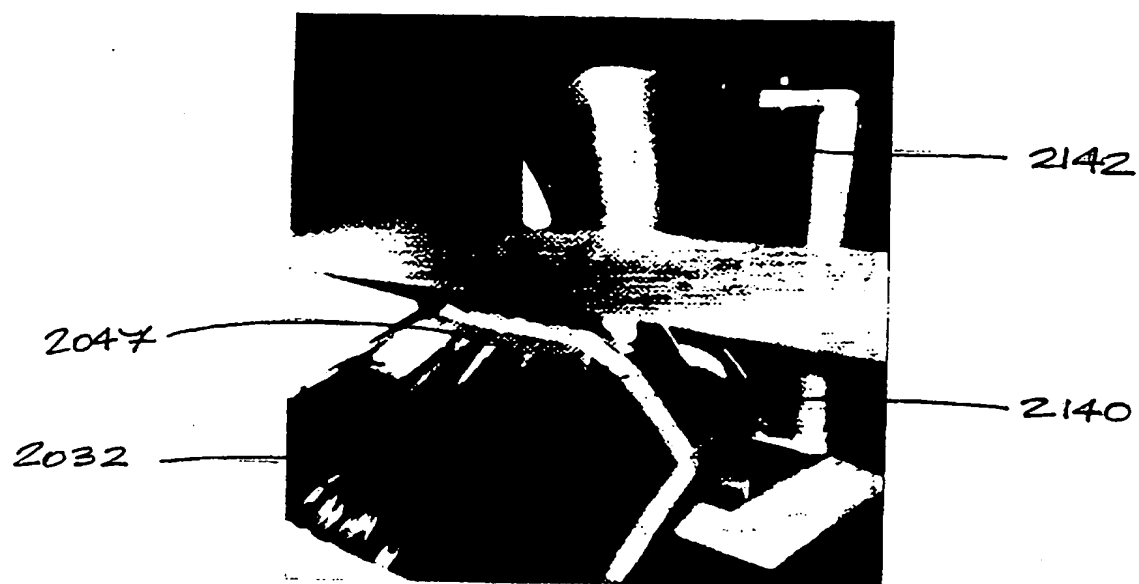


FIG. 30



FIG. 31

20 / 3 4

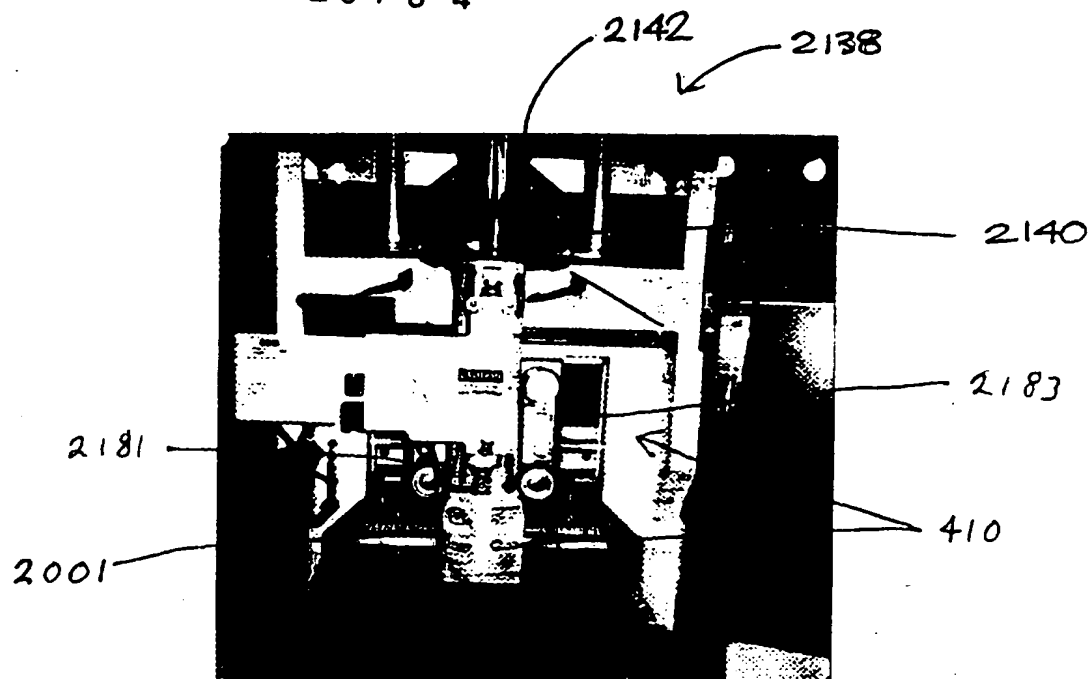


FIG. 32



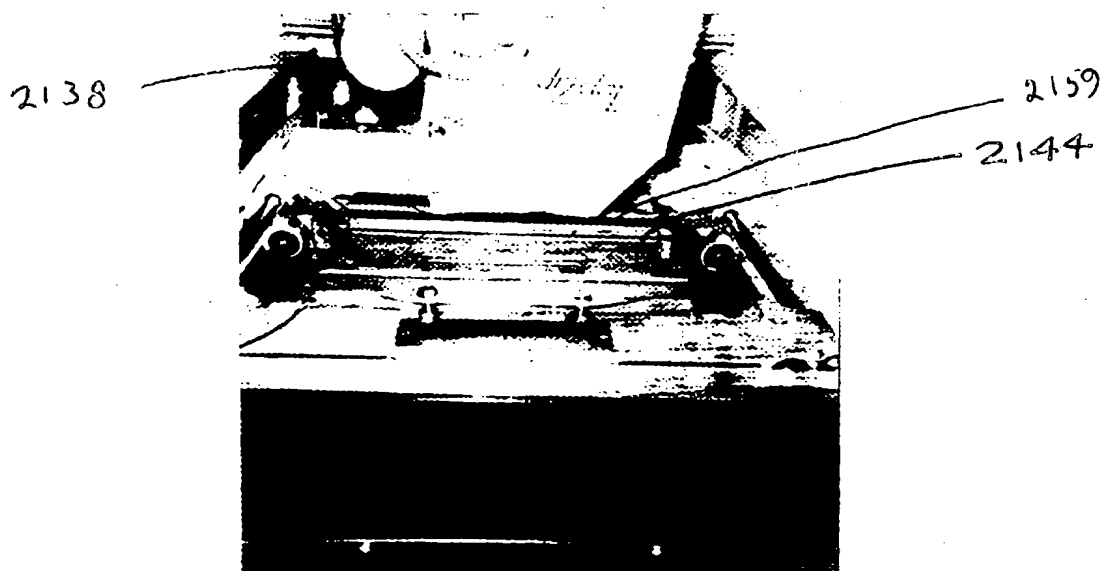


FIG. 33

21 / 3 4

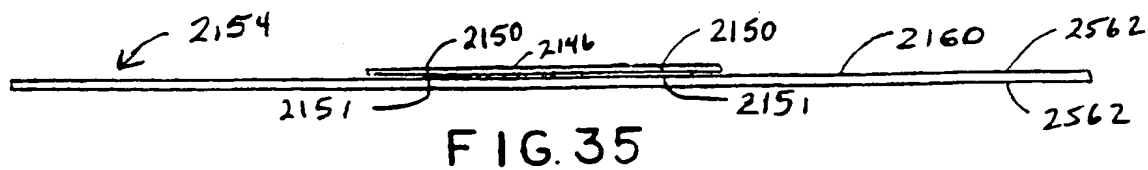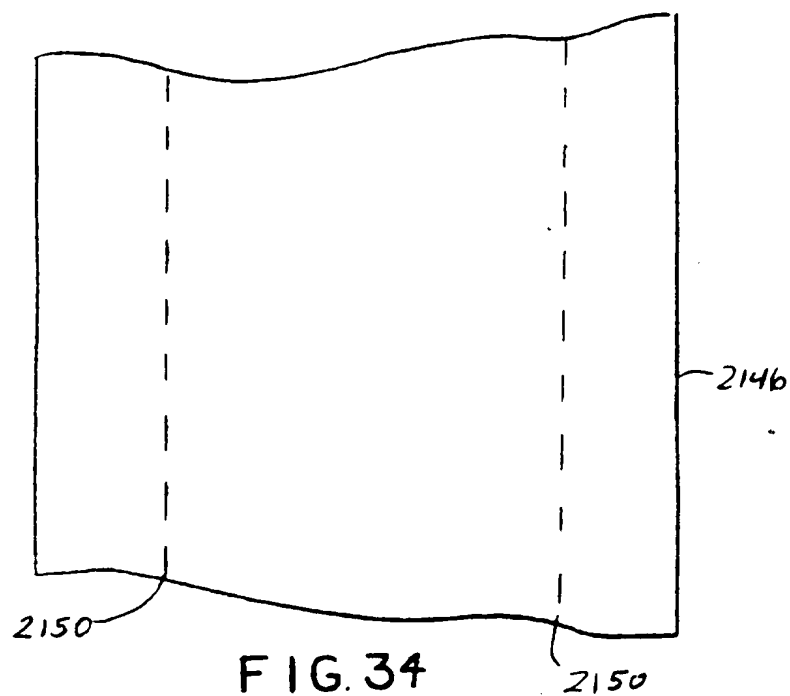

22 / 3 4

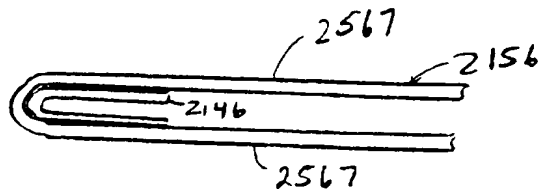


FIG. 36

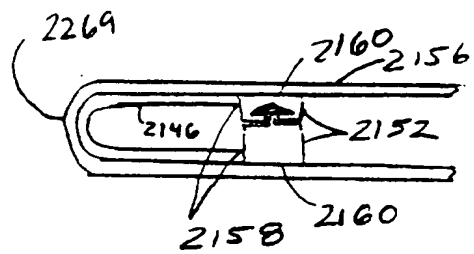


FIG. 37

23 / 3 4

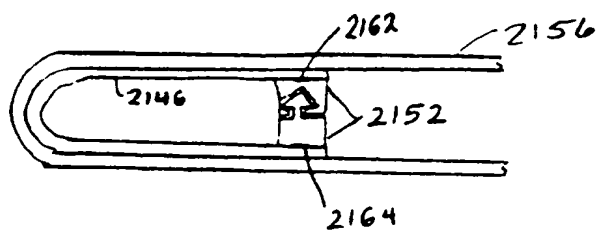


FIG. 38

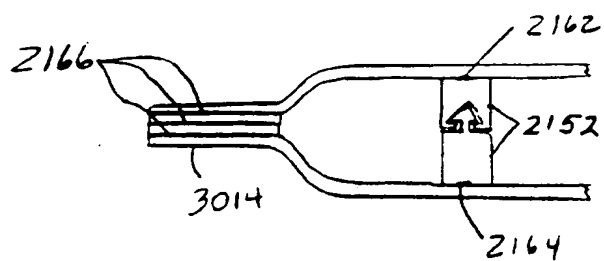


FIG. 39

24 / 3 4

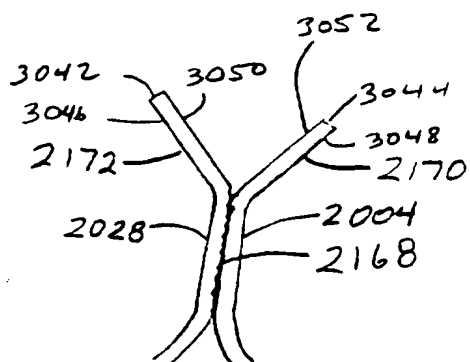


FIG. 40

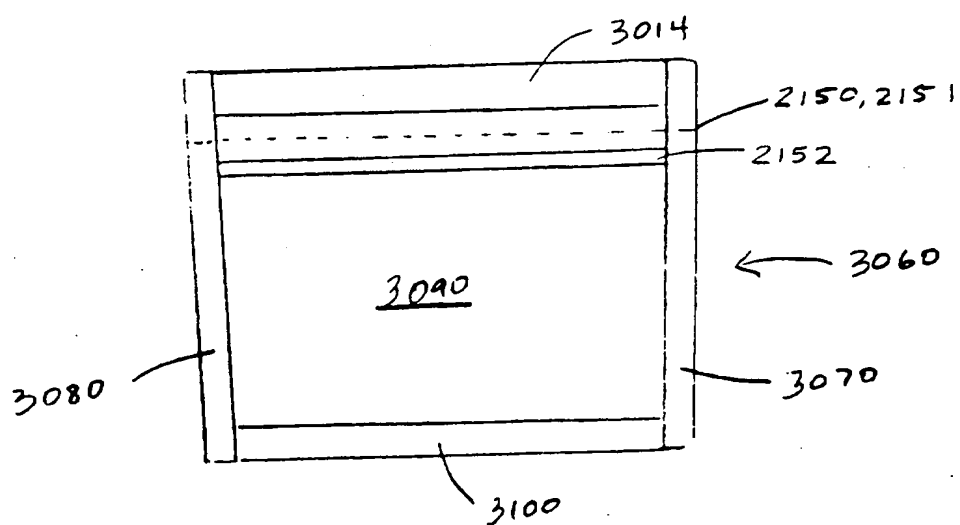


FIG 39a



26 / 3 4

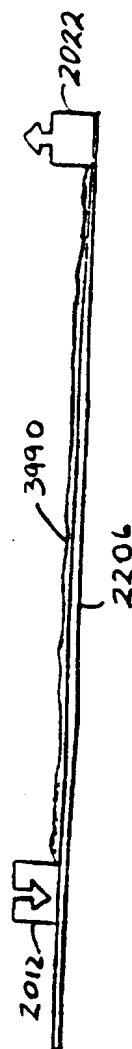


FIG. 42

27 / 3 4



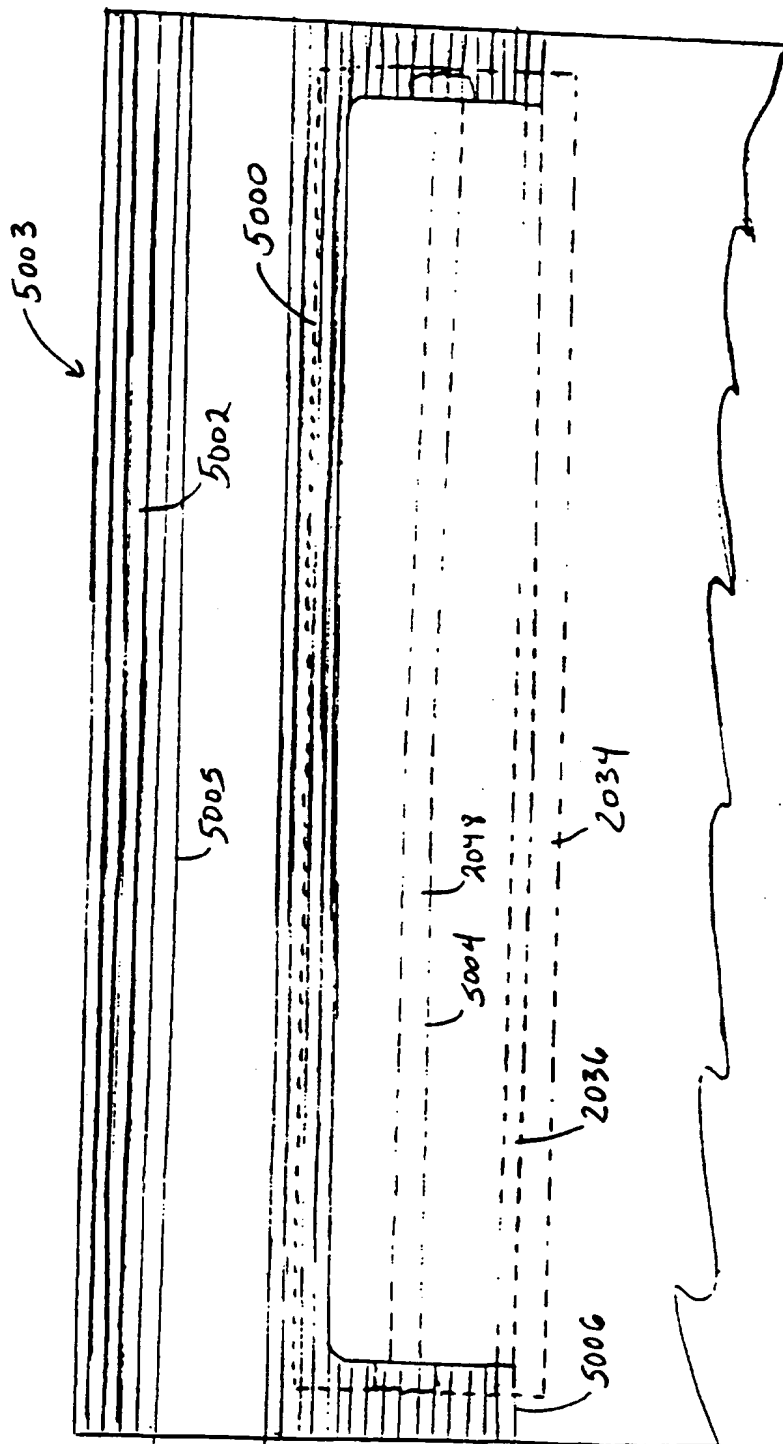


FIG 43


29 / 3 4

**FIG. 45**

30 / 3 4

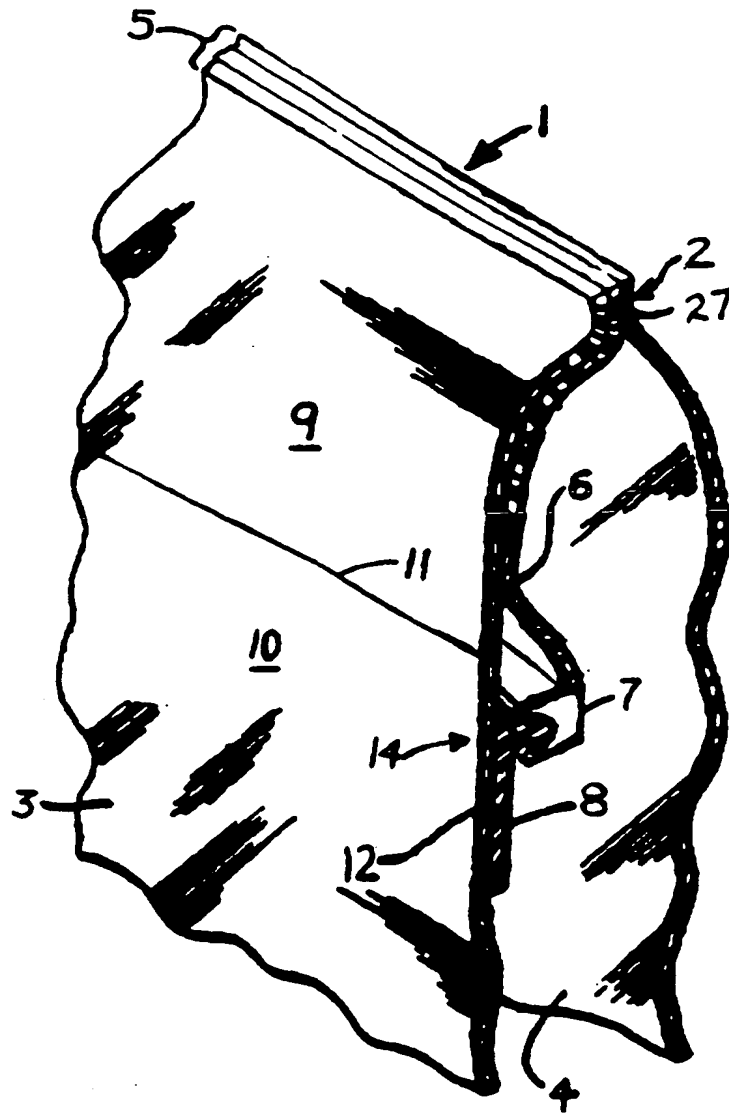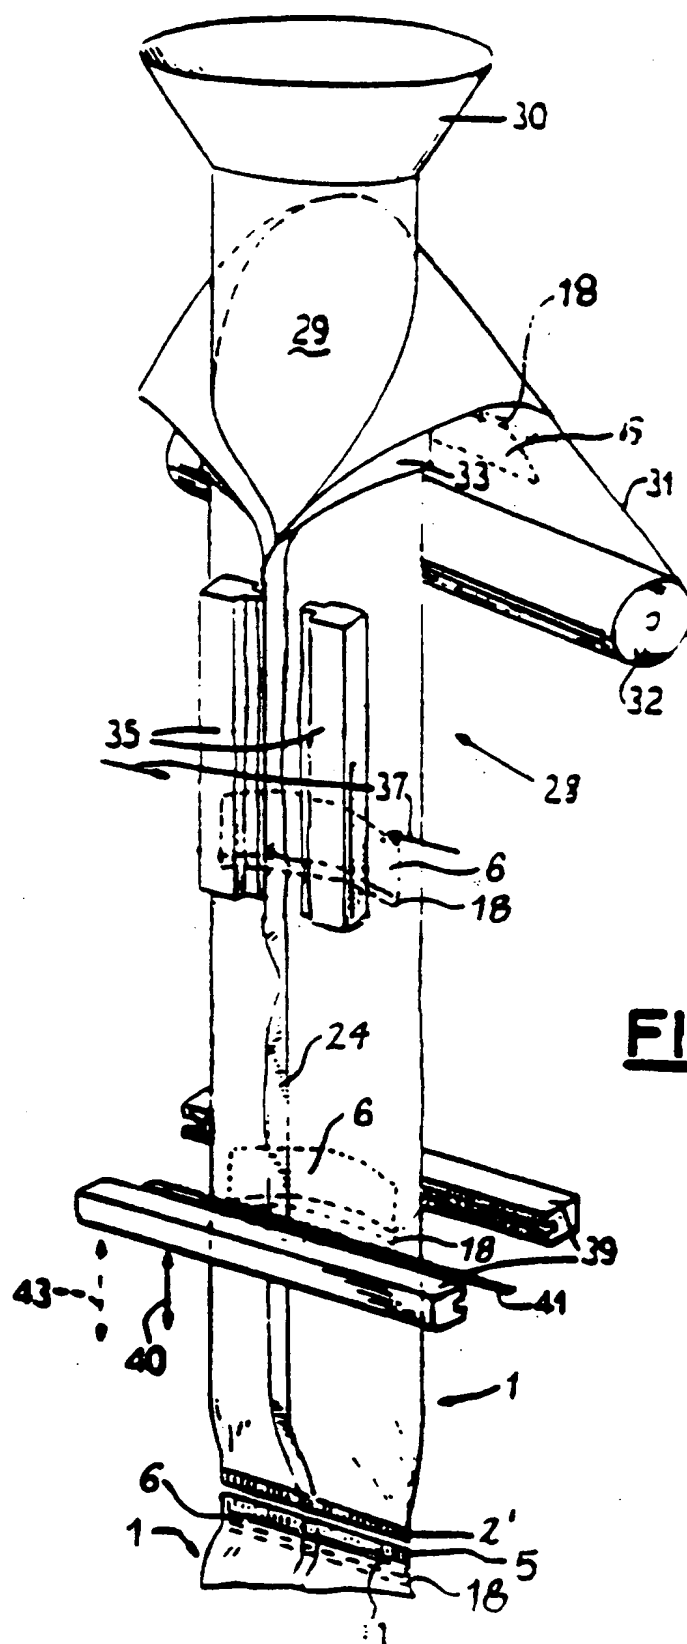

31 / 3 4

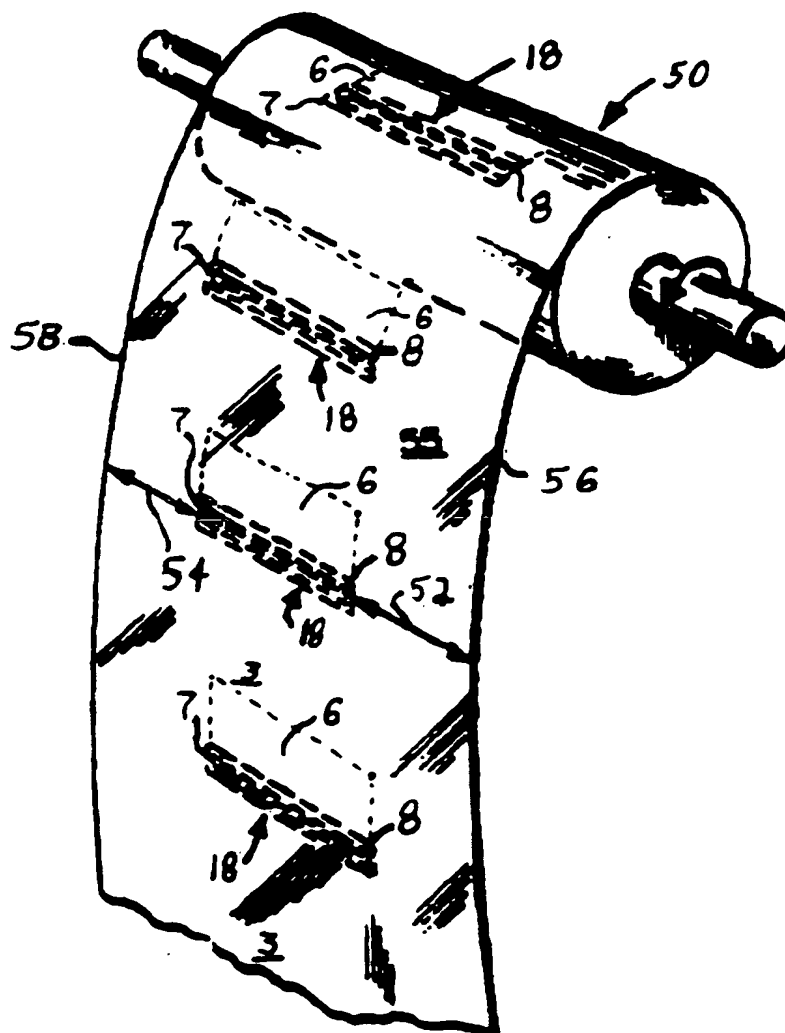**FIG. 47**

32 / 3 4

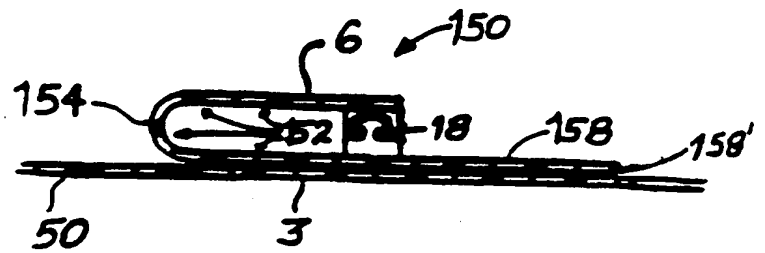
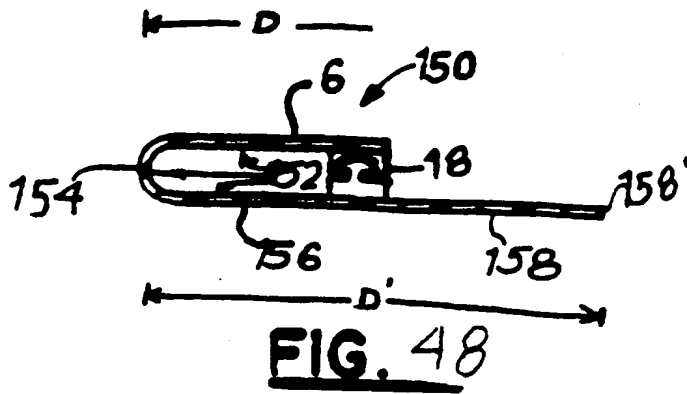


FIG. 49

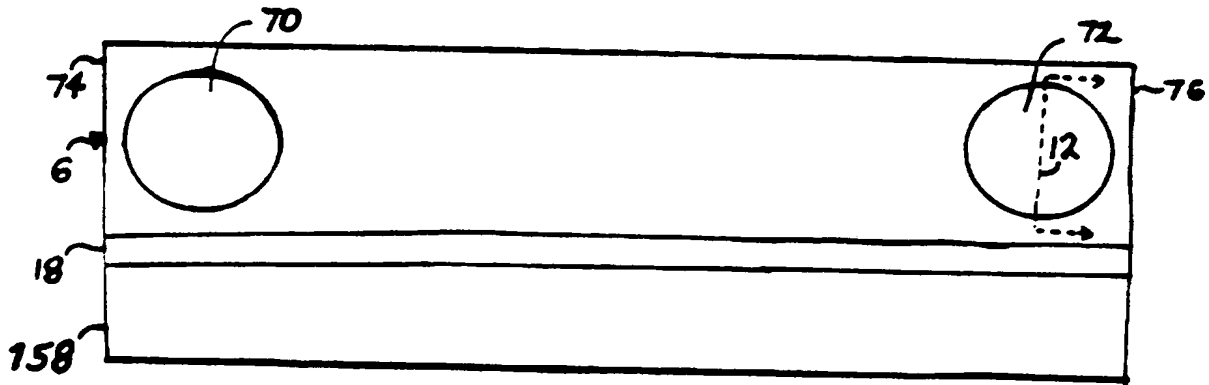


FIG. 54

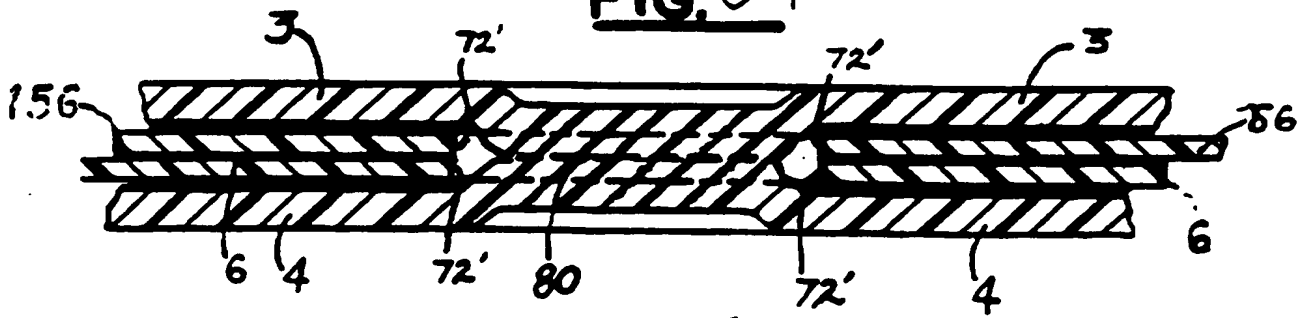


FIG. 55

33 / 3 4

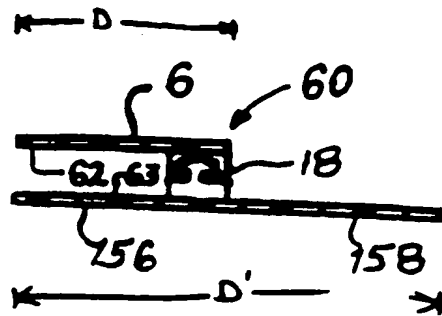


FIG. 51

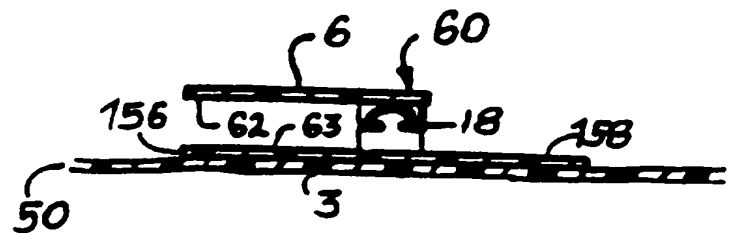


FIG. 52

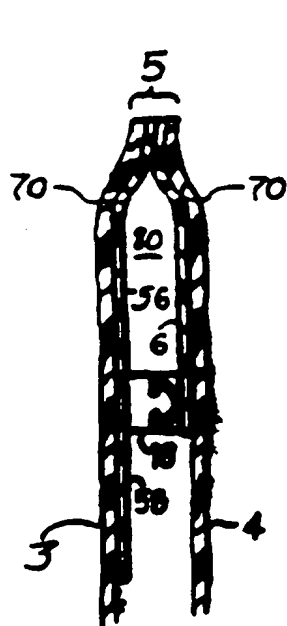


FIG. 50

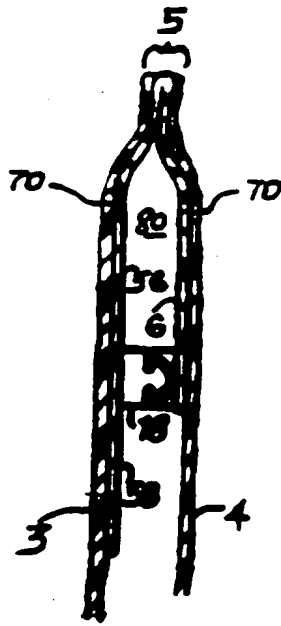


FIG. 53

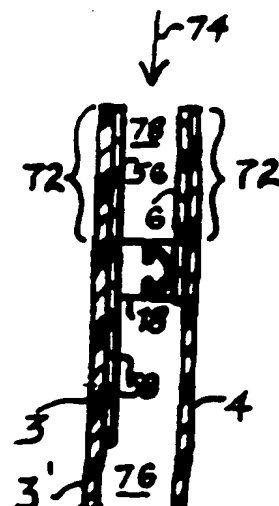


FIG. 57

34 / 3 4

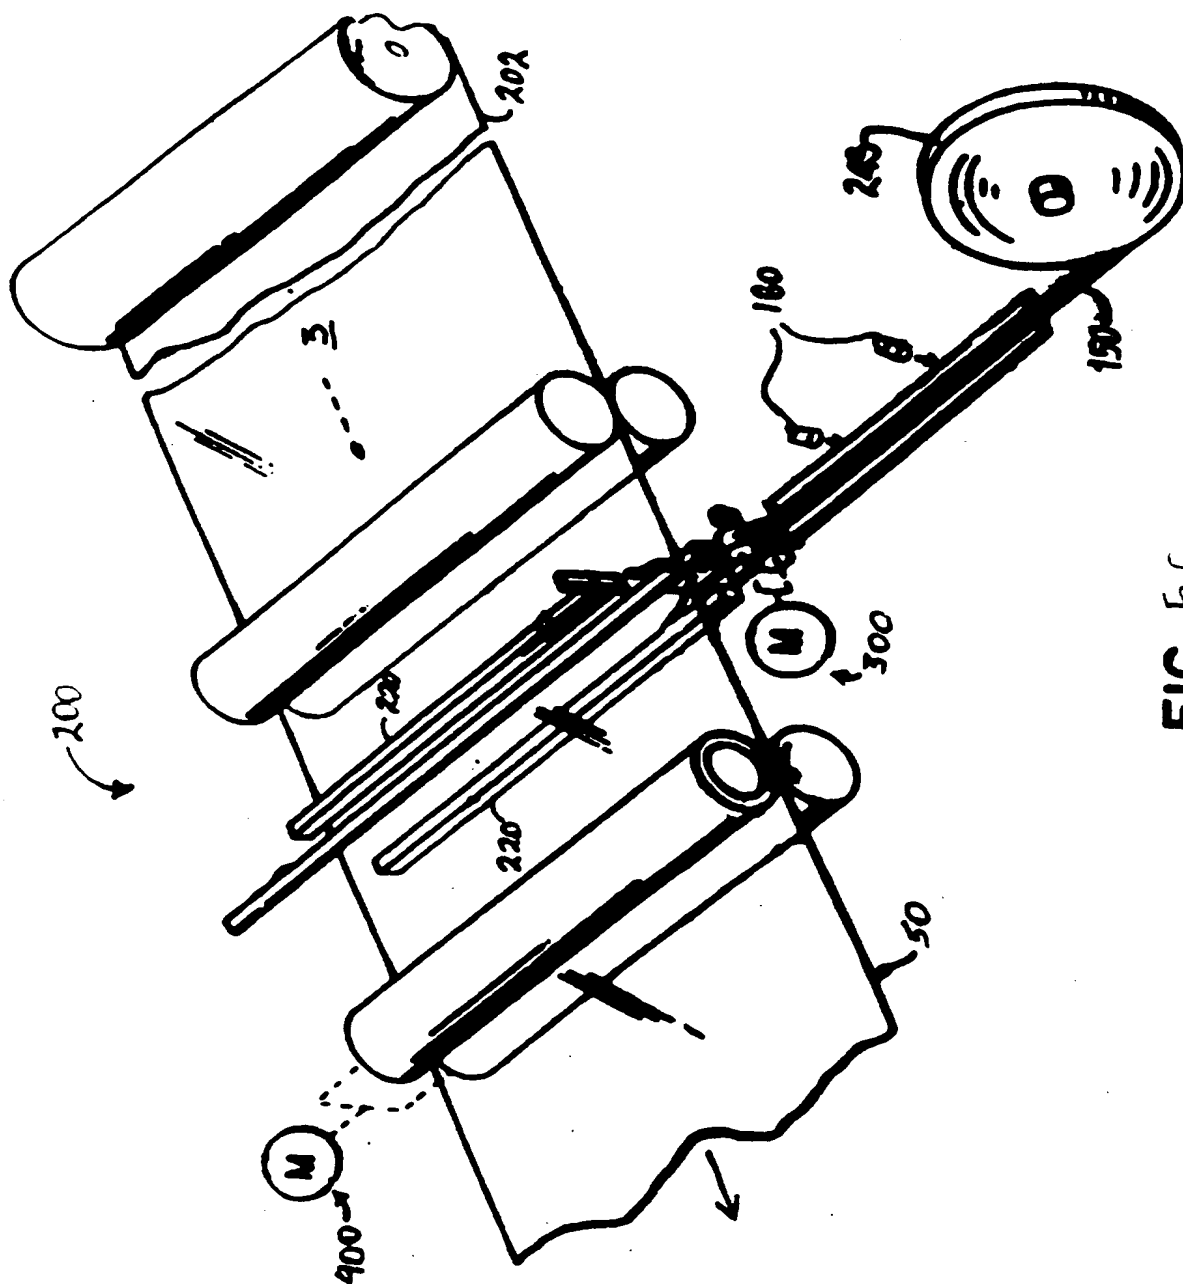


FIG. 56

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/13028

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : Please See Extra Sheet.

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 493/193, 212; 198/469.1; 226/8, 38; 53/416, 551; 428/98, 120; 24/381, 389, 390, 588; 206/810; 425/814; 156/200, 201, 438, 493

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
none

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4,709,398 A (AUSNIT) 24 November 1987, see entire document.	1-8,13-22
Y	US 5,648,140 A (VADERS) 15 July 1997, see entire document.	1,4,16,23,24,35,8 1,82
Y	US 4,355,494 A (TILMAN) 26 October 1982, see entire document.	2,3,5,19-22
Y	US 1,969,692 A (DIRKES) 07 August 1934, see entire document.	2,3,4,6,7
Y	US 3,667,664 A (SCHROEDER) 06 June 1972, see entire document.	2,3,4,6,7,20,21,22
Y	US 3,912,145 A (MEIHOFFER) 14 October 1975, see entire document.	2,3,4,6,7,20-22

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* "A"	document defining the general state of the art which is not considered to be of particular relevance	* "T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* "B"	earlier document published on or after the international filing date	* "X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
* "L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* "Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
* "O"	document referring to an oral disclosure, use, exhibition or other means	* "A"	document member of the same patent family
* "P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search 26 NOVEMBER 1997	Date of mailing of the international search report 24 DEC 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer JACK LAVINDER Telephone No. (703) 308-3421 <i>Sheila Vercy</i> <i>Patent Specialist</i> <i>Group 3200</i>

Form PCT/ISA/210 (second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/13028

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3,974,948 A (KROPPESTEDT) 17 AUGUST 1976, see entire document.	2,3,4,6,7,20-22
Y	US 4,617,683 A (CHRISROFF) 14 October 1986, see entire document.	5,29
Y	US 5,561,966 A (ENGLISH) 08 October 1996, see entire document.	5
Y	US 5,573,614 A (TILMAN ET AL.) 12 November 1996, see entire document.	8
X --- Y	US 4,430,070 A (AUSNIT) 07 February 1984, see entire document.	39-41, 52-55, 72,74,75,76,79 ----- 15,42-44, 48, 49, 51,77,78
Y	US 4,673,383 A (BENTSEN) 16 June 1987, see entire document.	15
Y	US 3,182,998 A (PETERSON) 11 MAY 1965, see entire document.	16
Y	US 5,373,933 A (PLANKE ET AL.) 20 December 1994, see entire document.	16
Y	US 5,600,906 A (HAMID) 11 February 1997, see entire document.	23,24,81,8 2
Y	US 4,614,512 A (CAPDEBOSCQ) 30 September 1986, see entire document.	23,24,81,82
X --- Y	US 4,807,300 A (AUSNIT ET AL.) 21 February 1989, see entire document.	25-28, 30-37 ----- 29, 35, 38, 42-44
Y	US 5,613,934 A (MAY) 25 March 1997, see entire document.	32,33
X --- Y	US 4,909,017 A (MCMAHON ET AL.) 20 March 1990, see entire document.	34,35,45,46,47,56, 61-65 ----- 48,49,51
X	US 4,878,987 A (VEN ERDEN) 07 November 1989, see entire document.	80

Form PCT/ISA/210 (continuation of second sheet)(July 1992)*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/13028

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐

The additional search fees were accompanied by the applicant's protest.

☒

No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/13028

A. CLASSIFICATION OF SUBJECT MATTER:

IPC (6):

B31B 1/64, 1/90; B65B 1/08, 43/42; B65G 29/00, 37/00; B32B 5/00; A44B 1/04, 11/25; B32B 31/00

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

493/193, 212; 198/469.1; 226/8, 38; 53/416, 551; 428/98, 120; 24/381, 389, 390, 588; 206/810; 425/814; 156/200, 201, 438, 493

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

- Group I, claims 1-3,8-19,81,82, drawn to a method of sealing tape to a web.
- Group II, claims 4-7,20-22, drawn to a means for controlling a tape applying machine.
- Group III, claims 23-24, drawn to a vacuum belt slit.
- Group IV, claims 25-29, 30-35, 47-51, drawn to a method of making a reclosable bag.
- Group V, claims 36-38, 80, drawn to a stock material web having interlocking lips.
- Group VI, claims 39-44, drawn to a tape.
- Group VII, claims 45,46, drawn to form fill and seal method.
- Group VIII, claims 52-55,77-79, drawn to a fastener flange.
- Group IX, claims 56-60, drawn to a method of making a tape.
- Group X, claims 61-71, drawn to a method of sealing a tape of flange to a web.
- Group XI, claims 72-74, drawn to a reclosable tape.
- Group XII, claims 75,76, drawn to a method of making a tape having a treating means and cutting means.

The inventions listed as Groups I and II-XII do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical features of group I, i.e., means for delivering tensioned tape comprising a tape registry assembly for adjusting the position of the tape and tape drive assembly are not recited in any of the other groups.

The inventions listed as Groups II and I, III-XII do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical features of group II, i.e., a control means for coordinating the signals from the means for detecting the position of the tension arm and the position of the tape and for controlling the speed of the web and the tape are not recited in any of the other groups.

The inventions listed as Groups III and I, II and VI-XII do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical feature of group III, i.e., vacuum belt slit is not recited in any of the other groups.

The inventions listed as Groups IV and I-III and V-XII do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical features of group VI, i.e., the limitations to the specific structures of the flexible interlocking fastener lip being permanently connected to a fastener assembly, the fastener assembly comprising an engaging portion releasably connected to a complimentary engaging portion, etc. are not recited in any of the other groups.

The inventions listed as Groups V and I-IV, VI-XII do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: the special technical features of group V, i.e., a web comprising a multiplicity of flexible interlocking fastener lips free of connection to the web wherein each of the lips are permanently connected to a fastener assembly, see claim 36, are not recited in any of the other groups.

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B31B 1/64, 1/90, B65B 1/08, 43/42, B65G 29/00, 37/00, B32B 5/00, A44B 1/04, 11/25, B32B 31/00	A1	(11) International Publication Number: WO 98/03328 (43) International Publication Date: 29 January 1998 (29.01.98)
---	-----------	--

(21) International Application Number: PCT/US97/13028

(22) International Filing Date: 24 July 1997 (24.07.97)

(30) Priority Data:

60/022,353	24 July 1996 (24.07.96)	US
60/036,186	18 January 1997 (18.01.97)	US
60/035,051	22 January 1997 (22.01.97)	US

(71)(72) Applicant and Inventor: JOHNSON, James [US/US];
4250 N.E. Expressway, P.O. Box 47784, Atlanta, GA
30340 (US).(74) Agent: BEISER, Robert, S.; Michael, Best & Friedrich, 77
West Wacker, Chicago, IL 60601-1635 (US).(81) Designated States: AU, CA, CN, JP, KR, MX, European
patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE).

Published

With international search report.
With amended claims.


Date of publication of the amended claims:

9 April 1998 (09.04.98)

(54) Title: FASTENER TAPE MATERIAL, BAG UTILIZING FASTENER TAPE MATERIAL, AND METHOD OF MANUFACTURE THEREOF

(57) Abstract

The present invention includes methods, an apparatus and a system in which reclosable bags and components thereof are formed. The reclosable bags (2001) are made from base web material that has transversely applied fastener tape segments thereon. The web material is used in a vertical form, fill and seal bag forming method. The method includes the steps of supplying a continuous strip of tape, having male and female fasteners profiled across the web for sealing thereon. In one embodiment a continuous strip of barrier material, and a continuous strip of fastener having first and second interlocked fastener profile strips are positioned on the continuous strip of tape; and secured thereon, the barrier tape is folded to obtain a fold and two opposing barrier tape fastener strip connecting portions; and, the fold is slit to form two separate continuous strips of barrier material strips and two continuous strips of tape. In another embodiment a coating is applied to the tape itself to prevent sealing of the folded slit tape to itself. The resulting tape and fastener are cut (220) and portioned properly on the web by the unique vacuum belt system of the present invention and by the interconnected tape drive, web drive and the connection to the form fill seal machine.

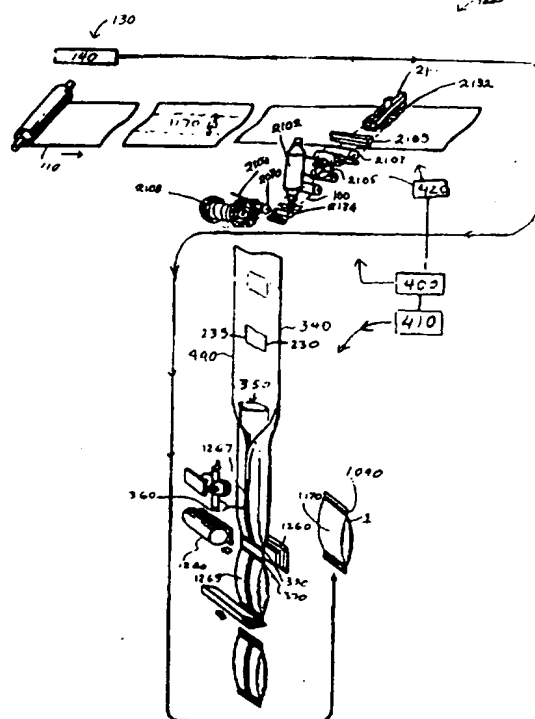

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

AMENDED CLAIMS

[received by the International Bureau on 24 February 1998 (24.02.98):
original 31 cancelled; original claims 1-13 and 32-82 amended;
remaining claims unchanged (17 pages)]

1. An apparatus for dispensing, applying, and sealing individual sections of thermoplastic tape having one or more fastener profiles attached thereto, said tape being sealed across a portion of a web of thermoplastic material, said apparatus comprising: means for dispensing said tape and fastener profiles; a tape applicator apparatus; means for delivering tensioned tape and fastener profiles from said tape dispensing means to said tape applicator apparatus, said means for delivering comprising a tape registration assembly for adjusting the position of said tape and fastener profiles and a tape drive assembly for advancing said tape and fastener profiles; a tape cutter assembly for cutting said tape and fastener profiles into individual sections of a preselected length; vacuum belt means for advancing said section of tape and fastener profiles into a desired position across said web of thermoplastic material; a tape sealing mechanism for applying pressure and heat to said tape section on said web for a specified dwell time; and means for sequentially advancing said web.
2. The apparatus of Claim 1 wherein said means for dispensing said tape comprises: a roll of said tape pivotally mounted on a powered unwind reel; a tension arm having said tape round thereon, said tension arm being slidably mounted so as to rise or descend in response to tension on said tape; and means for controlling rotation speed and tension of said unwind reel in response to said rising or descent of said tension arm.

3. The apparatus of said Claim 1 wherein said means for delivering tensional tape comprises: a plurality of dancer rollers thereon, the position of said tensioned dancer rollers indicating tension on said tape; film synchronizes means for synchronizing said tape with said tape application, said film synchronizer means
5 having one or more vertically adjustable rollers therein, said rollers being vertically adjustable in response to tension on said tape disposed through said rollers; and a tape registration assembly for adjusting the registration of said tape, and a nip drive assembly for feeding said tape in response to the position of said rollers in said film synchronizer means and the position of said dancer rollers.

10 4. An apparatus for dispensing, applying and sealing individual sections of thermoplastic tape having one or more fastener profiles attached thereto, said tape being sealed across a portion of a web of thermoplastic material, said apparatus comprising: means for advancing said web of thermoplastic material, said means including a motorized drive roll for dispensing said web; one or more dancer rollers
15 having said web threaded therethrough, a dancer arm supporting at least one of said dancer rollers; a pair of motorized nip rollers for advancing said web through said apparatus; means for detecting the position of said dancer arm and actuating said motorized drive roll and said motorized nip rolls at the speed required to maintain a selected tension on said web; means for detecting the position of said tape and
20 fasteners and for signaling said web drive roll and said nip rollers to speed up or slow down in response thereto; and control means for coordinating the signals from said means for detecting the position of said tension arm and said means for detecting the position of said tape and fasteners and for controlling the speed of said web and said tape and fasteners.

5. The apparatus of Claim 4 and further comprising: a form fill seal machine having a set of dancer rollers on the front portion thereof for carrying said web having said sections of tape thereon; a sensor for determining the position of at least one of said dancer rollers so as to determine the tension on said web; and means for signaling
5 said control means for controlling the speed of said web and said tape.

6. The apparatus of Claim 4 wherein said control means comprises: a computer electronically connected to said tension arm, said motorized drive roll, said means for detecting the position of said dancer arm, said motorized nip rollers, said means for detecting the position of said tape, said tape drive roll, and said tape nip
10 rollers.

7. The apparatus of Claim 4 wherein said control means comprises fluid logic controls to said tension arm, said motorized drive roll, said means for detecting the position of said dancer arm, said motorized nip rolls, said means for detecting the position of said tape, said tape drive roll and said tape nip rollers.

8. The apparatus of Claim 1 and further comprising: means for ultrasonic sealing the ends of said sections of said tape prior to cutting of said tape, positioned between said means for dispensing said tape and said tape applicator.

9. The apparatus of Claim 1 wherein said vacuum belt means, said tape registration assembly and said tape cutter assembly are interconnected by a belt drive constructed and arranged for maintaining the relative speed of operation of said
20 vacuum belt means, said tape cutter assembly and said nip rollers, and for retaining the relative position of said tape and said tape segments driving operation of said apparatus.

10. The apparatus of Claim 9 wherein said belt drive is powered by a single motor so as to provide constant speed and tension.

11. The apparatus of Claim 9 wherein said tape drive assembly comprises:
a double hub, having a first hub and a second hub, said first hub being connected by
5 a toothed belt to a third hub on said drive motor, said third hub being mounted on a
first shaft powered by said drive motor so as to rotate said third hub thereby causing
said double hub to rotate; said double hub being mounted on an end of one of said nip
rollers so as to cause rotation of said nip roller when said double hub is rotated; said
vacuum belt having a drive shaft extending through one end thereof and a fourth hub
10 extending from said drive shaft, said fourth hub having a toothed drive belt disposed
thereon; said toothed drive belt being connected to first said hub so as to cause said
fourth hub and said drive shaft to rotate when said first hub rotates, thereby driving
said vacuum belt in synchronization with said cutter assembly and said nip rollers.

12. The apparatus of Claim 1, wherein said tape cutter assembly comprises:
15 an air piston mechanism having a shaft extending downwardly therefrom, said air
piston being constructed and arranged to selectively raise and lower said shaft; a cutter
blade and clamp affixed to the distal end of said shaft for clamping and cutting of said
tape; a slidable die plate for selectively being positioned under said tape, said die plate
having a slot extending therethrough and a spring loaded stripper block proximate
20 said slot; said clamp being constructed and arranged for pushing down said stripper
block when said shaft is extended so as to facilitate cutting of said tape; said stripper
block being constructed and arranged to press upwardly when said clamp is pulled
upwardly by said shaft, said stripper block being constructed and arranged to push the
distal end of said tape towards said vacuum belt.

13. The apparatus of Claim 1 wherein said vacuum belt means comprises:
a vacuum belt having a plurality of holes extending therethrough; said vacuum belt
being rotatably mounted on a pair of rollers; at least one of said rollers being powered
so as to selectively cause rotation of said belt, and incremental advancement of said
5 belt a desired distance; a ledge extending below said belt constructed of a slick
thermoplastic elastomer and sized and positioned so as to serve as a barrier to air from
said web moving thereunder, and as an eliminator of plastic electricity.

14. The apparatus of Claim 13 wherein said vacuum belt is approximately
one inch wide and said holes are centered 5/8" from the edge of said belt.

10 15. The apparatus of Claim 1 wherein said tape comprises a folded loop
having a pair of interlocked fastener profiles attached thereto on the inside surface
thereof, said interlocked fastener profiles being constructed and arranged for
selectively opening and resealing, whereby when said tape is positioned and sealed on
said web, said web is suitable for conversion into a plurality of resealable bags.

15 16. A method of sealing individual sections of thermoplastic tape across a
portion of a web of thermoplastic material: dispensing said tape a desired distance;
cutting said tape to a desired length of the individual sections of said tape; grasping
the end of said individual section through the use of a vacuum; sequentially applying
vacuum to the length of said individual section of tape and simultaneously advancing
20 said individual section of tape over said web; pressing said individual section of tape
to said web; and heat sealing said individual section of tape to said web.

17. The method of Claim 16 and further comprising the step of coordinating
the advancement of said web with the advancement of said tape and said section of
tape.

18. The method of Claim 17 and further comprising the steps of: running said web from an unwind roll through a series of dancer rollers; reading the portion of said dancer rollers; signaling a drive motor to advance or retard said web based on the position of said dancer rollers; signaling a tape drive the position of said dancer roller; running said tape through a series of tape dancer rollers; signalling said tape drive the position of said tape dancer rollers, thereby causing said tape drive to advance or retard said tape; signalling said drive motor to advance or retard said web.

19. The method of Claim 18 and further comprising: feeding said web with sections of tape sealed thereon into a form fill seal machine and through a set of form fill seal dancer rollers at the back thereof; signalling the position of said form fill seal dancer rollers to said tape drive and said web drive motor so as to control movement of said tape and said web.

20. An apparatus for the coordination of web and tape in a multi dancer roller machine comprising: a sensor for detecting the position of said tape on tape dancer rollers; a sensor for detecting the position of said web on said web dancer rollers; means for coordinating sequential advancement of said tape, said web and the cutting of said tape.

21. The apparatus of Claim 1 and further comprising: computer means for coordinating said means for dispensing said tape, said tape applicator, said tape cutter, said tape drive, said vacuum belt and said means for sequentially advancing said web.

22. The apparatus of Claim 21 and further comprising: keyboard means for adjusting the length of said tape sections, the space between said tape sections sealed on said web, and the speed of operation of said apparatus for dispensing, applying and sealing said individual sections of tape to said web.

23. A vacuum belt slit for tape having fastener profiles thereon; said vacuum belt comprising: a vacuum belt having a plurality of holes extending therethrough; said vacuum belt being rotatably mounted on a pair of rollers; at least one of said rollers being powered so as to selectively cause rotation of said belt, and
5 incremental advancement of said belt a desired distance; a vacuum source for said vacuum belt; and said vacuum belt being aligned with a flange of said tape so that said fastener profiles run parallel to but not under said vacuum belt whereby said tape segments may be firmly drawn and held to said belt by said vacuum source, and advanced to a desired position over said web.

10 24. The apparatus of Claim 23 and further comprising: vertically movable sealing bar means for sealing said tape segment to said web, said sealing bar means being positioned so as to seal a portion of said tape running parallel to and extending laterally from under said vacuum belt to said web.

25. A method of manufacturing a reclosable bag having top and bottom
15 ends and opposing front and rear walls and a flexible interlocking fastener assembly said method comprising the steps of: sealing said fastener assembly to one or more lips; sealing one of said lips to one of said walls said fastener assembly comprising an engaging portion releasably connected to a complimentary engaging portion, and a flexible interlocking fastener assembly said method simultaneously sealing an end of
20 said front wall to said flexible interlocking fastener lip, and said back wall, whereby a fail-safe reclosable bag barrier is formed reducing the risk of contamination or release of contents within or from an interior storage volume of said bag by inadvertent separation of one portion of said front wall from another portion of said wall.

26. The method of Claim 25 further comprising the steps of securing said complimentary engaging portion to a front wall portion of said web material; and, releasably interconnecting said complementary engaging portion to said engaging portion upstream from a forming and filling nozzle cylinder of a form, fill and seal machine.

27. The method of Claim 25 further comprising the step of securing predetermined sections of said fastener assembly having said flexible interlocking fastener lip to a continuous elongate sheet of said web material at bag length intervals along said continuous elongate sheet.

28. The method of Claim 25 in which said step of sealing includes heat sealing.

29. The method of Claim 25 further comprising the step of inserting products into said reclosable bag.

30. A reclosable bag having front and back walls and a first end and a second end comprising: an interlocking fastener lip having an engaging member thereon, said interlocking fastener lip disposed between said walls and sealed to said walls at said first end of said bag; a complimentary engaging member aligned with respect to said engaging member and connected to said front wall below said first end of said bag, said engaging member being releasably connected to said complimentary engaging member, so that contamination or release of the contents of said reclosable bag is prevented upon inadvertent separation of said bag walls.

31. Cancelled.

32. The recloseable bag of Claim 30 further comprising a rupture line disposed on said front wall between said first end and said complementary engaging member.

5 33. The reclosable bag of Claim 32 and further comprising promotional material or coupons disposed in a pouch formed from said lip and said front wall, said promotional material or coupons being accessible by rupture of said rupture line.

10 34. An apparatus for manufacturing reclosable bags having top and bottom ends and opposing front and rear walls comprising, in combination, web material having thereon a flexible interlocking fastener lip permanently connected to a fastener assembly, said fastener assembly comprising an engaging portion releasably connected to a complimentary engaging portion, said complimentary engaging portion being connected to said front wall; said apparatus comprising;

15 means for simultaneously sealing an end of said front wall to said flexible interlocking fastener lip, and said flexible interlocking fastener lip to said back wall; and

means for forming and sealing said bags from said web material.

35. The apparatus of Claim 34 further comprising; means for filling said recloseable plastic bags with products.

20 36. A web comprising a multiplicity of flexible interlocking fastener lips free of connection to said web, each of said lips being permanently connected to a fastener assembly, each of said fastener assemblies comprising an engaging member interlocked and releasably connected to a complimentary engaging member, said complimentary engaging member being connected to a front wall portion of said web.

37. The web of Claim 36 in which said web is provided on a roll.

38. The web of Claim 37 in which several of said rolls are packaged together.

5 39. A tape constructed and arranged for sealing to a web, said tape comprising a lip, said lip having a fold therein, an opposite wall connected to said fold, and a flange connected to said opposite wall, said lip, opposite wall and flange having an outer surface thereof capable of being sealed to said web, said lip having a recloseable fastener portion connected thereto at an end thereof inatable to a mating fastener connected to said opposite wall, said mating fastener having said flange
10 juxtaposed thereto and being substantially parallel to an end of said flange, and said lip, bend, and opposite wall having an inside surface thereof treated so as to be non-sealable.

40. The tape of Claim 39 without said fold.

15 41. The tape of Claim 39 in which said lip, fold, opposite wall and flange comprise a continuous piece of plastic material.

20 42. A bag having a front and back wall, said bag comprising the tape of Claim 39 in which said outer surface of said opposite wall and said flange is sealed to said front wall and said lip is sealed to said back wall, said bag having an upper severable portion and a temporary storage volume accessible by severance of said upper severable portion, in which severance of said upper several portion provides access to said reclosable fastener portion and said mating fastener.

43. The bag of Claim 42 in which said outer surface of said opposite wall and said flange is substantially sealed to said front wall and said lip is substantially sealed to said back wall.

44. The bag of Claim 42 in which said there are two apertures on said tape and in which multiple fusible seals are disposed at opposite ends of said bag sealing said front wall to said back wall.

45. A simplified method of manufacturing a reclosable bag having top and bottom ends, opposing front and rear walls and a top seal, comprising the steps of:
5 securing a fastener assembly having a fastener element and a mating fastener element to a front wall portion of a web material at said fastener element and releasably interconnecting said fastener element to said fastener mating element, said fastener mating element having thereon a flexible interlocking fastener lip permanently
10 connected to said mating fastener element; forming said walls from said web material; sealing an end portion of said front wall to an end portion of said flexible interlocking fastener lip; and, sealing said end portion of said flexible interlocking fastener lip to an end portion of said back wall to form said top seal of said reclosable bag, in which said sealing steps occur simultaneously.

46. The method of Claim 45 in which said sealing step occurs after said
15 forming step.

47. A method of making a reclosable bag having top and bottom seals and opposing front and rear walls, said reclosable bag made from web material having a length and a width, comprising the steps of: connecting a predetermined length of fastener tape having a lip substantially perpendicular to said length of said web material, said fastener tape being connected to said front wall at said lip of said fastener tape, said fastener tape having an interlocked fastener connected thereto, forming said opposing front and rear walls, and said top and bottom seals; and, connecting said fastener tape to said front and rear walls at an additional location other than said interlocked fastener or said lip.

48. The method of Claim 47 in which said fastener flange is substantially h-shaped, said h-shaped fastener flange having a first and second leg, and further comprising the step of connecting said interlocked fastener to each of said legs.

49. The method of Claim 48 further comprising the step of connecting barrier tape to an inside wall of each of said legs.

50. The method of Claim 48 further comprising the step of coating an inside wall of each of said legs to make each said inside wall non-sealing.

51. The method of Claim 48 further comprising the steps of providing said fastener tape or flange from a roll, cutting said fastener tape or flange to obtain said predetermined length of fastener tape or flange, said predetermined length of fastener tape or flange having two opposing ends, and sealing said opposing ends.

52. A fastener flange, said fastener flange being substantially h-shaped, said substantially h-shaped fastener flange having a first leg and a second leg, said first leg being connected to said second leg by an interlocked fastener, and a mounting lip connected to said second leg.

53. The fastener flange of Claim 52 in which said first leg and said second leg comprise a closed loop.

54. The fastener flange of Claim 52 in which said fastener flange is formed from thermoplastic material in the range of up to 4 mil in thickness.

5 55. The fastener flange of Claim 52 in which the interlocked fastener and said fastener flange are non-homogeneous.

56. A method of manufacturing fastener tape for sealing to a bag wall, said method comprising the steps of: connecting a fastener of an interlocked fastener assembly to a base tape material, said interlocked fastener assembly having said fastener and a fastener complementary to said fastener, folding said base tape material
10 over said complementary fastener to form a fold, and, connecting said complementary fastener to said base tape material.

57. The method of Claim 56 further comprising the step of slitting said fold to form a fastener flange.

15 58. The method of Claim 56 further comprising the step of coating an interior surface of said base tape material to make it non-sealing.

59. The method of Claim 56 further comprising the step applying barrier tape on the inside surface of said fold.

20 60. The method of Claim 59 further comprising the step of slitting said barrier tape and said fold to form a fastener flange.

61. A method of sealing fastener tape to a web in a form, fill, seal machine, said fastener tape or flange having an interlocked fastener connected thereto, and said web having a length and a width, said method comprising the step of: connecting a predetermined length of said fastener tape substantially perpendicular to said length of said web at a location other than at said interlocked fastener.

62. The method of Claim 61 further comprising the step of connecting said predetermined length of said fastener tape to a front wall of a bag formed in said machine, at a substantially flat lip of said fastener tape extending parallel thereto and on one side thereof.

63. The method of Claim 61 further comprising sealing said predetermined length of said fastener tape to said web at least two locations other than at said interlocked fastener.

64. The method of Claim 63 in which said two additional locations comprise a front wall and a back wall of a bag formed in said form, fill, seal machine.

65. The method of Claim 63 further comprising the step of staking said fastener tape to said web prior to said connecting step.

66. The method of Claim 63 further comprising the steps of pinning or optionally staking one end of said fastener tape prior to cutting a second end of said fastener tape.

67. The method of Claim 66 further comprising the step of simultaneously pinning a second end of said fastener tape during said cutting step.

68. The method of Claim 62 in which said connecting step further comprises the step of sealing said lip to said web to form a seal while said fastener tape is pinned to said web.

69. The method of Claim 68 in which said seal is substantially parallel to said interlocked fastener.

70. The method of Claim 68 in which a seal bar performs said step of sealing, and further comprising the steps of pinning said fastener tape to said web while said seal bar moves away from a sealing position.

71. The method of Claim 61 further comprising the step of connecting ends of said predetermined length of said fastener tape to keep said interlocked profile in alignment.

72. A reclosable tape for bags comprising, a reclosable interlocked fastener connected to a tape, said tape having a loop with a fold therein, said reclosable interlocked fastener being connected to said loop, said loop having a non-sealable inside loop surface, so as to prevent sealing of said inside loop surface to said bags.

73. The reclosable tape of Claim 72 in which said inside loop surface is selected from the group consisting of an electronic corona style treated surface, a non-sealable lacquer treated surface, and a surface having a non-sealable barrier strip applied thereto.

74. The reclosable tape of Claim 72, in which said tape further comprises a web material compatible outside surface, and in which at least a portion of said inside loop surface is fastener compatible.

5 75. An apparatus for making recloseable tape having first interlocked and second fasteners thereon, said apparatus, comprising: first connecting means for connecting said first fastener of said interlocked fasteners to a base tape, folding means for folding said base tape over said second fastener of said interlocked fasteners and for forming a fold, second connecting means for connecting said second fasteners of said interlocked fasteners to said base tape, treating means for making at least one inside wall of said recloseable tape non-sealable, and, cutting means for cutting said fold.

10 76. The apparatus of Claim 75 further comprising rolling means for rolling said recloseable tape onto a spool.

77. A snack bag comprising the recloseable tape of Claim 71.

78. The snack bag of Claim 77 further comprising having a thin sealant layer disposed above said recloseable tape to provide for ease of opening of said snack bag.

15 79. A tape for interconnected fasteners, said tape comprising a lip, said interconnected fasteners being connected to said lip, and a loop connected to said interconnected fasteners, said loop being sized and dimensioned to provide sufficient stiffness to allow for the movement of said tape for interconnected fasteners by a vacuum belt.

5 80. An elongate web having a length and a width comprising a multiplicity of segments of fastener tape or flange connected to said web substantially perpendicular to the length of said web, each said fastener tape having a lip, said lip sealed to said web at predetermined intervals at a lip seal, each said lip having a flexible interlocked fastener thereon, each said interlocked fastener being spaced apart from said lip seal and unconnected to said web at said interlocked fastener.

10 81. The method of Claim 23 and further comprising: continuously applying said vacuum to said vacuum belt whereby positioning of said individual section of tape on said vacuum belt is fixed; and moving said web with said individual section of tape affixed thereon without releasing said vacuum, said seal of said individual section of tape to said web being strong enough to overcome the pull of said vacuum during movement of said web.

15 82. The apparatus of Claim 16 wherein said vacuum source is continuously applied to said vacuum belt without cycling on and off, whereby precise positioning of said tape segment on said vacuum belt is maintained.

THIS PAGE BLANK (0870)